

Foot Valve

Model 60SE





Flomatic Corporation

Sizes 2-1/2" Thru 4" / 65 mm Thru 100 mm

Material

Enviro Check®

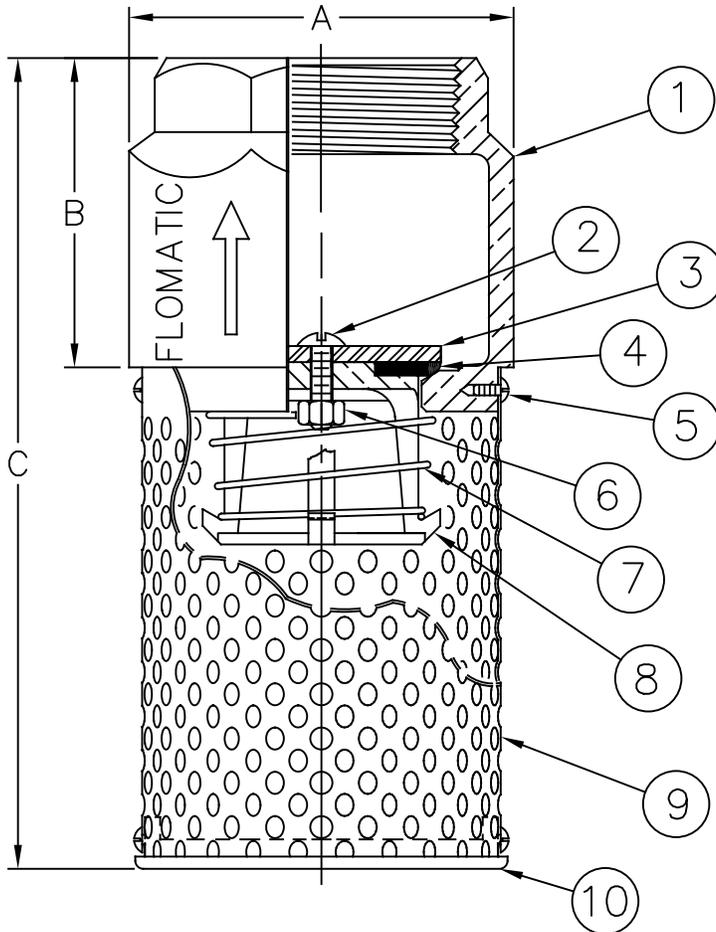

Max Temp 180°F (82°C)
Max Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833	6	1	Jam Nut	Stainless Steel	304
2	1	Screw	Stainless Steel	18-8	7	1	Spring	Stainless Steel	302
3	1	Flat Washer	Stainless Steel	304	8	1	Guide*	Unleaded Bronze	C89833
4	1	Disc	Buna	N-5007	9	1	Screen	Stainless Steel	304
5	A/R	Screw	Stainless Steel	316	10	1	Cap	Unleaded Bronze	C89833

* Guide for the 4" is 316 Stainless Steel

Dimensions (FNPT)

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
2-1/2	65	4106E	3-21/32	93	2-59/64	74	8-1/16	205	6	2.8
3	80	4107E	4-9/16	116	3-13/32	97	9-9/16	243	11	5
4	100	4108E	6-1/8	156	4-1/4	108	12-13/32	315	19	8.6

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2019 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



February 28, 2005
Dwg No: S4106E-8 Rev: G (4/19)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798