

F402-1.28**FLUSHBOY**

HIGH EFFICIENCY TOILET
 (1.28gpf / 4.8 Lpf Per Flush)


Polished chrome plated flush valve, chloramine resistant diaphragm, 1.28 gallons per flush, externally adjustable, with 1" vandle resistant capped screwdrive angle stop with back-check, renewable main valve seat, metal "Rubberflex" oscillating handle, "Turn-to-Silence" equipment, with "Kwik-fit" threaded union tailpiece, vacuum breaker, wall flange, spud nut and spud flange for 1½" top spud.

Variations

- ☐ G – Bumper on angle stop (for seat without cover)
- ☐ O – Flush connection for 1¼" spud
- ☐ T36 – Solid ring wall support for flush connection
- ☐ T42 – Sweat adapter kit for stop
- ☐ T46 – Split ring wall support for flush connection
- ☐ T106 – Mashaerator self cleaning bypass diaphragm

Remarks

***** *For use with 1.28 gallons high efficiency toilet*

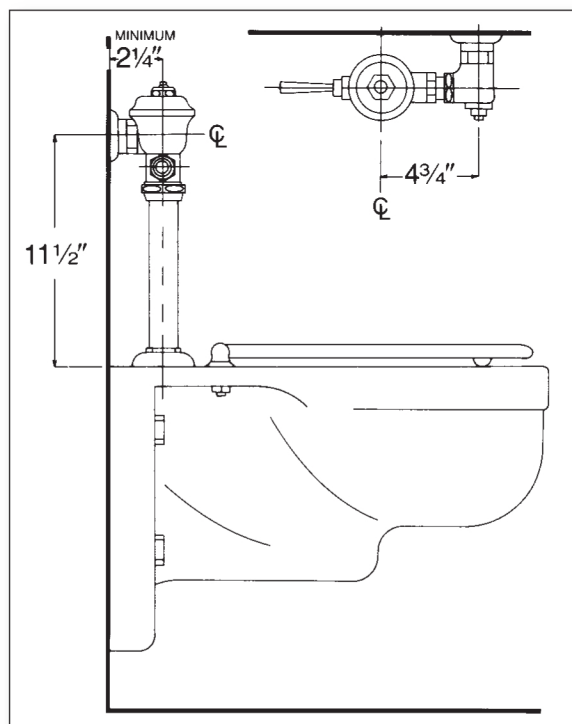

P.O. Box 411 • Charlottesville • VA • 22902 • USA
 Phone: (434) 296-0166 • Fax (434) 977-3596
 Email: info@delanyproducts.com
 Web: www.delanyproducts.com
 ©2014

