


Location:



Shower & Tub-Shower Mixing Valve

Models 86-1X-BODY, 86-2X-BODY

Specification Submittal

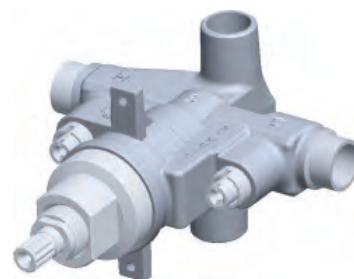

Model Numbers

- ☐ 86-1X-BODY.... Shower Valve
4-Port Temptrol Shower mixing valve. Includes plug installed in tub supply output port
- ☐ 86-2X-BODY.... Tub-Shower Valve
4-Port Temptrol Tub-Shower mixing valve

Feature Highlights

- Symmons Temptrol 4-port pressure balancing mixing valve with adjustable stop screw to limit handle turn
- Integral service stops to allow water shut-off for servicing valve
- Supply input ports 1/2 inch sweat
- Output ports 1/2 inch sweat


Warranty

- Limited Lifetime - to the original end purchaser in residential/consumer installations.
- 5 years - for commercial installations

Standards / Certifications

ASME A112.18.1; CSA B125.1

Dimensions Temptrol Tub-Shower Mixing Valve, 4-port valve with service stops

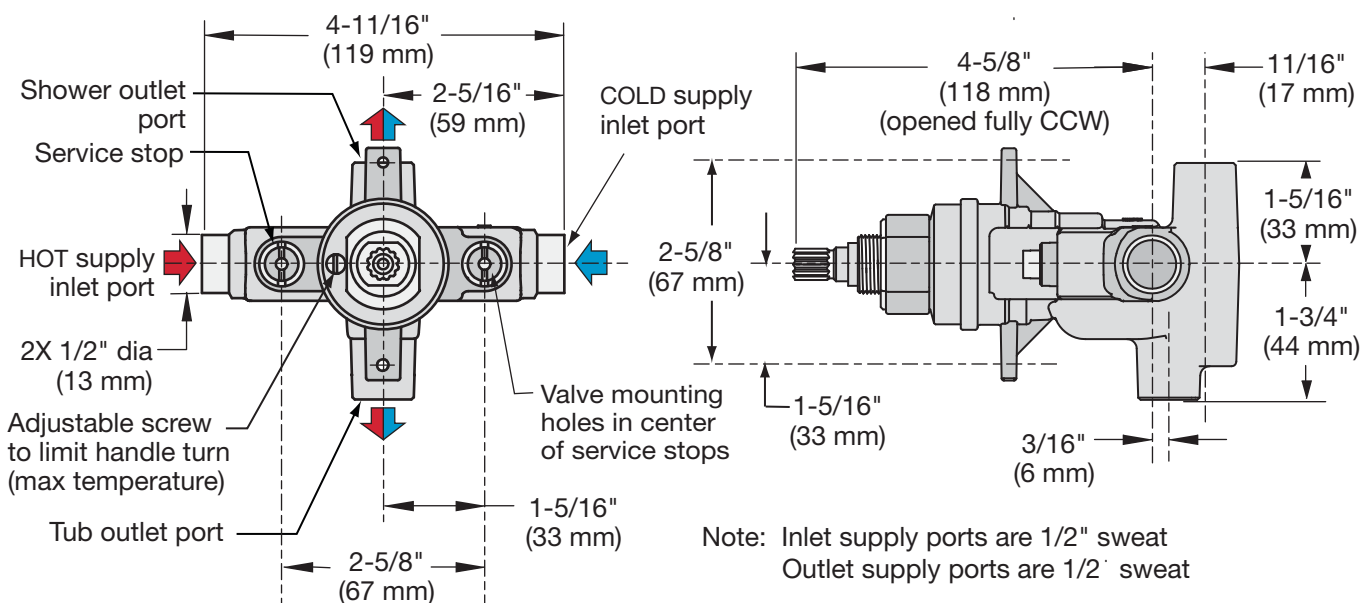

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
(800) 796-6667 ■ Fax (800) 961-9621
Website: www.symmons.com ■ Email: gethelp@symmons.com

©2009-2014 Symmons Industries, Inc. Printed in U.S.A. ■ 062514

