


Location:



SYMMONS® Allura™

Shower Valve System 4700

Specification Submittal



Feature Highlights

- Symmons shower valve system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Standard Polished chrome finish

Model Numbers

- ☐ 4700.....Shower Valve System with Symmons Temptrol® pressure balancing mixing valve
p/n 4000-BODY
- ☐ 4700-TRM.....Trim only, valve must be ordered separately
- ☐ 4000-BODY.....Symmons Temptrol® pressure balancing mixing valve without trim
- ☐ 4000-X-BODY....Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.

Finish Options / Modifications

Append appropriate -suffix to model number.

- ☐ -STN Satin nickel
- Polished chrome (standard finish)

Options / Modifications

Append appropriate -suffix to model number.

- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ☐ -X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4700.)


Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions *Allura Shower Valve System, 4700*

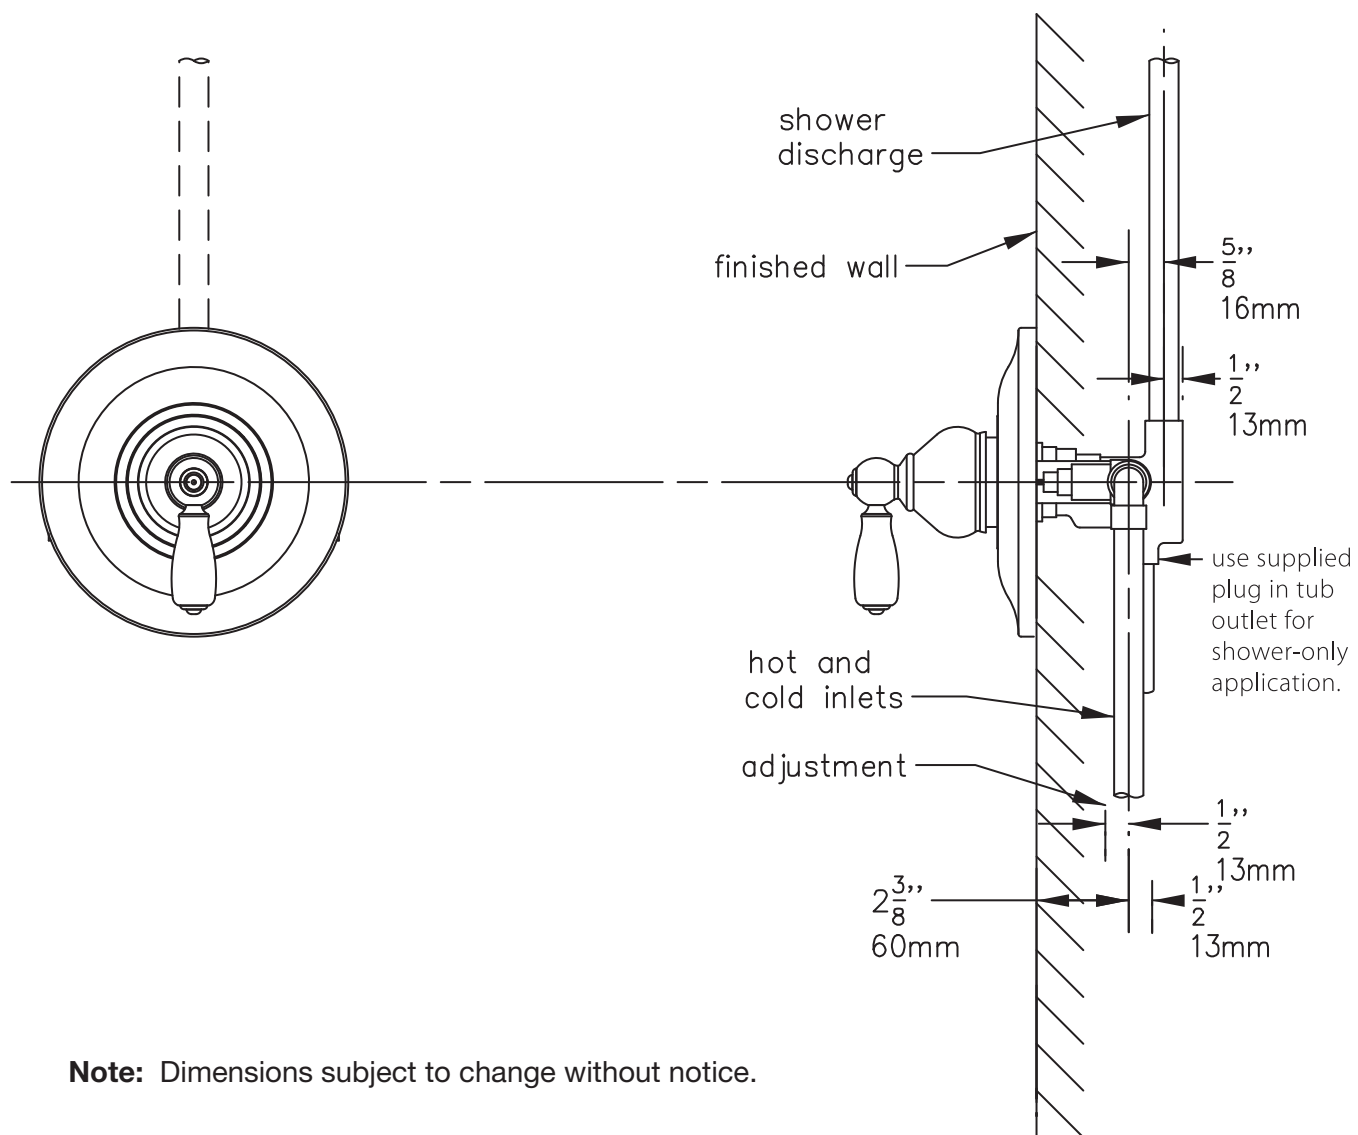

Note: Dimensions subject to change without notice.