

COMMERCIAL

DESCRIPTION

- Metal and brass construction with Chrome plated finish, also in Classic Brushed Nickel (CBN) finish
- Pressure balancing cycle valve
 Contains: hand-held shower, with non-positive pause, 30" slide bar, drop ell, vacuum breaker, 69" metal hose and mounting hardware
- Slide bar is NOT DESIGNED TO BE A GRAB BAR
- Supplied with vandal resistant screws
- Quick cleaning rubber nozzles

OPERATION

- Temperature valve has ADA compliant lever style handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock, and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop
- Préssure balancing mechanism maintains selected discharge temperature to \pm 3.6°
- Easy to operate pause button (reduces the flow of water to a trickle)

- T8346 (2.5gpm/9.5 lpm) Chrome finish
 T8346CBN (2.5gpm/9.5 lpm) CBN finish
 T8346EP15 (1.5gpm/5.7 lpm) Chrome finish; WaterSense® Certified
- T8346EP15CBN (1.5gpm/5.7 lpm) CBN finish; WaterSense® Certified

CARTRIDGE

- Pair with a brass Posi-Temp rough-in valve:


- 8370HD*: 1/2" CC connection without integral stops 8371HD*: 1/2" CC connection with integral stops 8372HD*: 1/2" IPS connection with integral stops 8373HD*: 1/2" PEX connection with integral stops 8373HD*: 1/2" CPVC connection with integral stops
- 8375HD*: 1/2" UPONOR connection with integral stops *Includes the 1222HD Brass Posi-Temp Cartridge
- Accommodates back to back installations

STANDARDS

- Third party certified to WaterSense® (only applies to 1.5 gpm) ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- **ADA** for lever handle

WARRANTY

Warranted for 5 years against material or manufacturing defects




Specifications

Single-Handle Posi-Temp Handheld Shower System

Model: T8346, T8346CBN





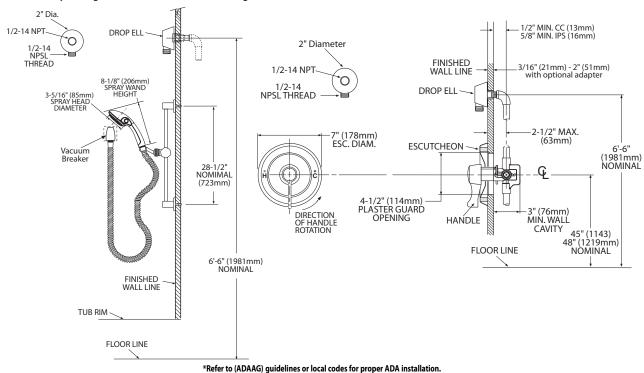

CRITICAL DIMENSIONS

(DO NOT SCALE)