




GRANBY
STORAGE TANKS

RESIDENTIAL OIL TANKS

SIMPLY THE STRONGEST MADE TANKS ON THE MARKET

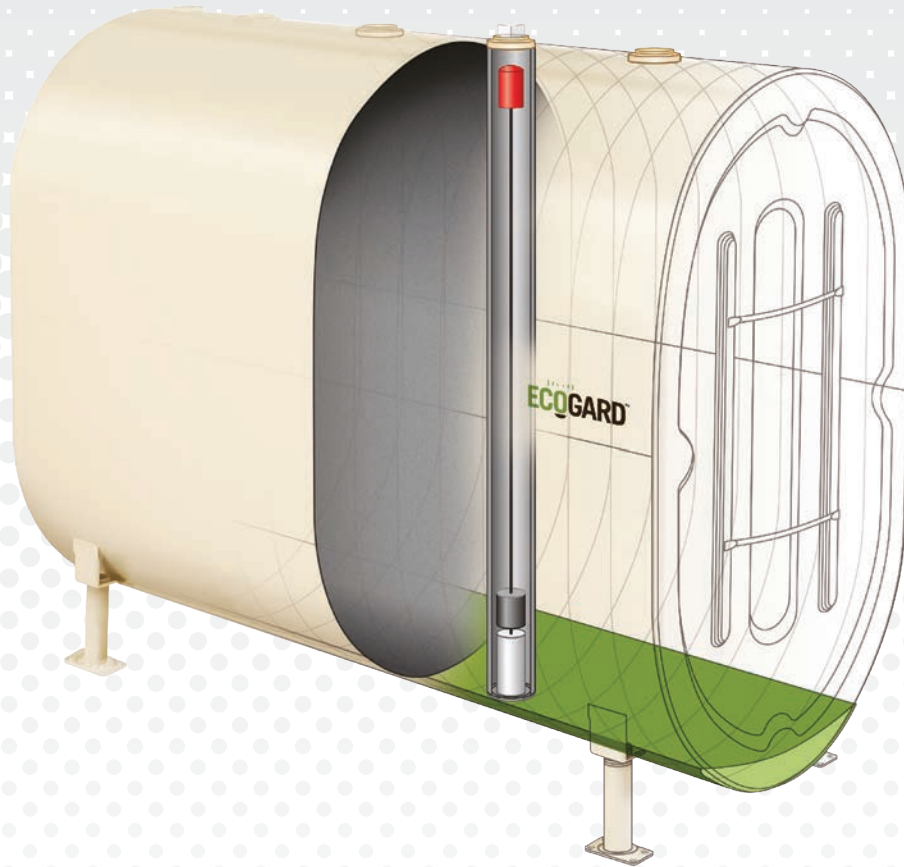

A LOGICAL AND RESPONSIBLE CHOICE

SAFETY AND RELIABILITY

Granby Industries offers the most complete line of oil tanks with secondary containment systems.

Whether it be our ECOPLUS and ECOGARD double-bottom tanks or our 2-in-1 tanks with a 110% secondary containment, you will not find safer and more reliable oil tanks on the market.

GUARANTEED DURABILITY

Granby Industries offers oil tanks made of non-corrosive material such as HDPE plastic on its 2-in-1 tanks and fibreglass.

Tanks built of non-corrosive material provide greater durability.

PEACE OF MIND

With 65+ years of experience, Granby Industries is known for its quality and proven track record in innovation and design.

GREAT WARRANTIES

Warranty of up to 30 years.



OptiFuel
OPTIMIZING COMBUSTION

MAXIMIZE YOUR EFFICIENCY
**ADD THE GRANBY OPTIFUEL
AUTOMATIC OIL DE-AERATOR**



RESIDENTIAL OIL TANKS / UL 80



Product #	Capacity (US gal.)	Model	Gauge thickness	Dimensions			Weight (pounds)
				H	W	L	
209101	120	vert.	12	47"	23"	30"	170
208101	138	vert.	12	44"	27"	30"	160
208601	138	horiz.	12	27"	44"	30"	160
207101	220	stubbies/vert.	12	44"	27"	48"	220
203201	230	thin/vert.	12	44"	22"	60"	235
203701	230	thin/horiz.	12	22"	44"	60"	235
202201	240	narrow/vert.	12	47"	23"	60"	265
202701	240	narrow/horiz.	12	23"	47"	60"	265
204201	275	vert.	12	44"	27"	60"	255
204203	275	vert./UL-142	12	44"	27"	60"	255
204701	275	horiz.	12	27"	44"	60"	255
211201	275	vert.	10	44"	27"	60"	330
211701	275	horiz.	10	27"	44"	60"	330
205201	330	vert.	12	44"	27"	72"	290
205203	330	vert./UL-142	12	44"	27"	72"	290
205701	330	horiz.	12	27"	44"	72"	290

External finish: BLACK electrostatic powder paint or if you desire GREY add a G at the end of the item number.

Warranty*: 10 years

Touch up paint: PE0030C "BLACK"
PE0032C "GREY"

CYLINDRICAL MODELS HORIZONTAL



Product #	Capacity (US gal.)	Model	Gauge cover thickness	Dimensions			Weight (pounds)
				Shell	Dia.	Height	
3005224	138	horiz.	12	12"	26"	60"	165

External finish: BLACK electrostatic paint

Warranty*: 3 years



20PLUS

Residential oil tanks with polyurethane coating

20PLUS



Product #	Capacity (US gal.)	Model	Gauge thickness	Dimensions			Weight (pounds)
				H	W	L	
204201P	275	vert.	12	44"	27"	60"	257
204701P	275	horiz.	12	27"	44"	60"	257
205201P	330	vert.	12	44"	27"	72"	290
205701P	330	horiz.	12	27"	44"	72"	290
211201P	275	vert.	10	44"	27"	60"	334

UL 142 also available (275 and 330 gal.)

External finish: BEIGE polyurethane coating
Touch up paint: PEO056C "BEIGE"
KR0001 (repair kit)

Warranty*: 20 years



ECOGARD

Residential oil tanks with double-bottom protection system

ECOGARD

Product #	Capacity (US gal.)	Model	Gauge thickness	Dimensions			Weight (pounds)
				H	W	L	
244201	275	vert.	12	44"	27"	60"	290
241201	275	vert.	10	44"	27"	60"	370
245201	330	vert.	12	44"	27"	72"	334

External finish: BEIGE powder paint coating
Touch up paint: PEO055C "BEIGE"

Warranty*: 25 years



ECOPLUS


Residential oil tanks with ECOGARD + 20PLUS
with polyurethane coating

ECOPLUS

Product #	Capacity (US gal.)	Model	Gauge thickness	Dimensions			Weight (pounds)
				H	W	L	
244201P	275	vert.	12	44"	27"	60"	295
241201P	275	vert.	10	44"	27"	60"	375
245201P	330	vert.	12	44"	27"	72"	340

External finish: BEIGE polyurethane coating
Touch up paint: PEO056C "BEIGE"
KR0001 (repair kit)

Warranty*: 30 years

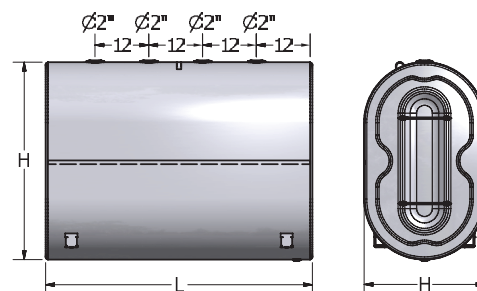

TECHNICAL SPECIFICATIONS

- Steel ASTM A1011
- Female threaded openings
- Pressure tested at 5 to 7 PSIG
- UL 80 & UL 142 listed
- Operation at atmospheric pressure



*See warranty certificate for additional details

2-in-1 Double-wall tanks | HDPE plastic tanks inside a galvanized secondary containment

Model #	Top opening qty	Burner oil supply opening size / location	Capacity L / IMP / USG	Dimensions (in.) H · W · L	Weight lb.	Approved usage
961225	4	3/8" and 1/2" / top duplex bushing	720 / 158 / 190	48 · 28 · 44	150	Indoors / outdoors
961226	4	3/8" and 1/2" / top duplex bushing	1000 / 220 / 265	63 · 28 · 44	185	Indoors / outdoors



TANKS COME FULLY PACKAGED AND EQUIPPED FROM FACTORY WITH NECESSARY INSTALLATION ACCESSORIES

- 2" NPT galvanized steel fill pipe adaptor
- Low-pressure vent and overfill protection alarm
- Oil level gauge
- Oil burner supply duplex bushing with tube adaptors
- Optimal space utilization



Warranty: 30 years*

GENERAL CHARACTERISTICS 2-IN-1 DOUBLE-WALL OIL TANKS ULC-S670 / UL-2258

- Primary tank made of blow-molded high-density polyethylene (HDPE)
- Internal tank is fluorination treated for odor and chemical resistance, which is unique to the Granby 2-in-1 tanks*
- Secondary containment made of galvanized steel on both sides, tightly welded and edged using state-of-the-art manufacturing equipment
- Visual leak indicator for the monitoring of the integrity of the primary tank
- Connection fittings made of cast aluminum for greater torque resistance and greater peripheral sealing
- Rugged floor stand made entirely of galvanized steel
 - Suited for basements with headrooms as low as 60"
 - Ease in maneuverability and access through narrow doorways only 28" wide
- Easy carrying due to light weight and welded handles
- 30-year limited warranty
- B100 bio-fuel ready
- Optional rain cover mandatory for outdoor installation

2-IN-1 SAFETY TANK SYSTEM OPTIONAL AND/OR SPARE ACCESSORIES

Modèle #	Description
960000	Rain cover—mandatory for outdoor installations
962245	Installation tie-down kit for 720 L / 190 USG
962246	Tie-down kit for 1000 L / 265 USG
962247	Leak indicator assembly for 720 L / 190 USG
962248	Leak indicator assembly for 1000 L / 265 USG
962266	Sealed fuel oil rope gauge 720 L / 190 USG
962267	Sealed fuel oil rope gauge 1000 L / 265 USG
962280	Metallic cap nut ADC12
971040	2" transition fitting for gauge
E206-0001	Compression fitting 1/2" x 1/2" tube
E207F-999S	Duplex bushing with 3/8" x 1/2" NPT fitting
E208F-999S	Duplex bushing with 1/2" x 1/2" NPT fitting
E209-0001	Compression fitting 1/2" x 3/8" tube
E250-999S	Threaded 2" NPT fill pipe adaptor
E540-999	2" NPT low-restriction vent and overfill alarm
JE03002	Gauge gasket 3.275 x 2.725 x 0.125 UL157
JE15020	Metallic cap nut O-ring seal CDPM

*Consult warranty documents for details.



For more information,
please contact the head office
98, des Industries
Cowansville, (Quebec) J2K 0A1 Canada
@ sales@granbyindustries.com
W granbyindustries.com



* Fluorination is used to make specific modifications to the surface properties of plastics such as wettability and permeation resistance. It is a process that has been used in the automotive industry for more than ten years as a way of reducing the permeation of fuel vapors from the tanks of motor vehicles.