

P-2361+ Resilient Wedge Gate Valve

PIV – PLUS: 4" – 12"/DN100 – DN300

Mueller Co.8"/DN200
shown

PRODUCT FEATURES


- Post Indicator Valve (PIV), Standard-PLUS (+) Gate Valve.
- Ductile Iron Body, Bonnet and Post Indicator Flange.
- Mueller Pro-Gard® 2-Pass Fusion Bonded Epoxy Coating covers all cast surfaces inside and out – 10 mils (250 µm) minimum. Meets requirements of AWWA / ANSI C550.
- Meets requirements of AWWA / ANSI C515 and is certified to ANSI / NSF 61 & 372.
- Ductile Iron Wedge, symmetrical and fully encapsulated with molded EPDM rubber; no exposed iron.
- Polymer cap bearing on wedge guides.
- Everdur Bronze Stem.
- 316 Bolts, Nuts and Washers.
- Three stem O-rings seal in lubricant – two above thrust collar, one below.
- Polymer anti-friction washers – one above and one below thrust collar reduce operating torque.
- Bi-directional flow.
- 10-year limited warranty.
- Working Pressure: 350 psig / 24 barg; Test Pressure: 700 psig / 48 barg.
- UL 262 listed, FM 1120 / 1130 approved.
- Flange End drilling meets: ANSI B16.1, Class 125 and ANSI B16.42, Class 150 Flat Face. Mechanical Joint also available.
- Fitted with End Covers as standard.

PARTS LIST

ID	PART NAME	MATERIAL
1	Cap Screw	316 Stainless Steel (See Note 2)
2	Wrench Nut	Ductile Iron ASTM A536
3	Stem	Silicon Bronze ASTM B98 (C66100)
4	Stuffing Box	Ductile Iron ASTM A536
5	Stuffing Box Bolts / Nuts	316 Stainless Steel (See Note 2)
6	O-Ring	EPDM ASTM D2000
7	O-Ring	EPDM ASTM D2000
8	Anti-Friction Washer	Acetal
9	Bonnet	Ductile Iron ASTM A536
10	Bonnet Bolts / Nuts	316 Stainless Steel (See Note 2)
11	Bonnet Gasket (O-Ring)	EPDM ASTM D2000
13	Wedge Nut	Bronze ASTM B584
14	Wedge	(See Note 1)
15	Guide Cap	Acetal
16	Body	Ductile Iron ASTM A536


NOTES:

1. Rubber-encapsulated Ductile Iron Wedge, Rubber – EPDM ASTM D2000, Ductile Iron ASTM A536.
2. Bonnet Bolts, Cap Screw and Stuffing Box Bolts – ASTM F593 Group 2-CW; Nuts – ASTM F594 Group 2-CW.

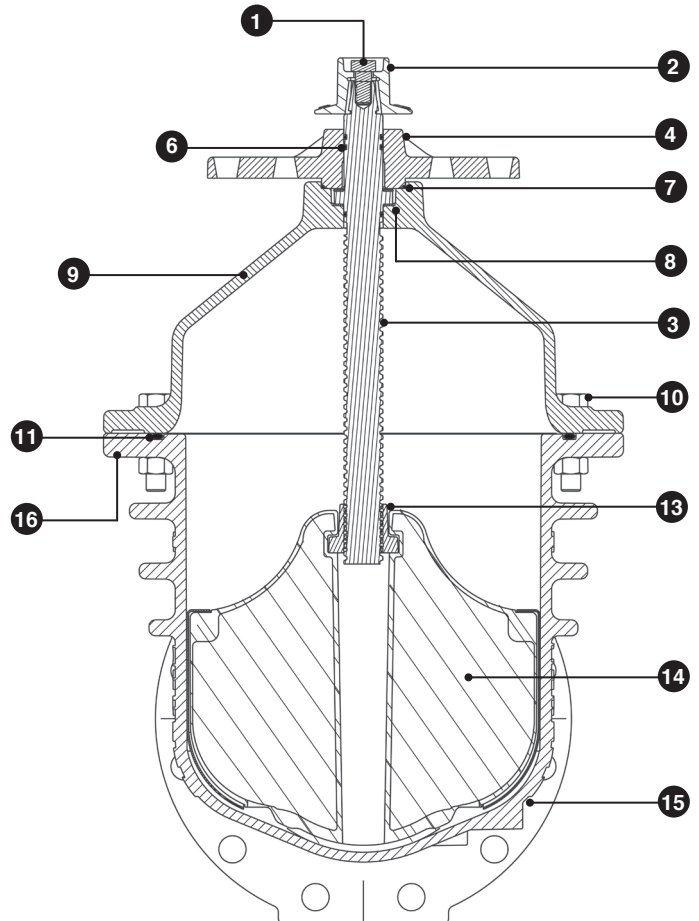

P-2361+ Resilient Wedge Gate Valve

PIV – PLUS: 4" – 12"/DN100 – DN300

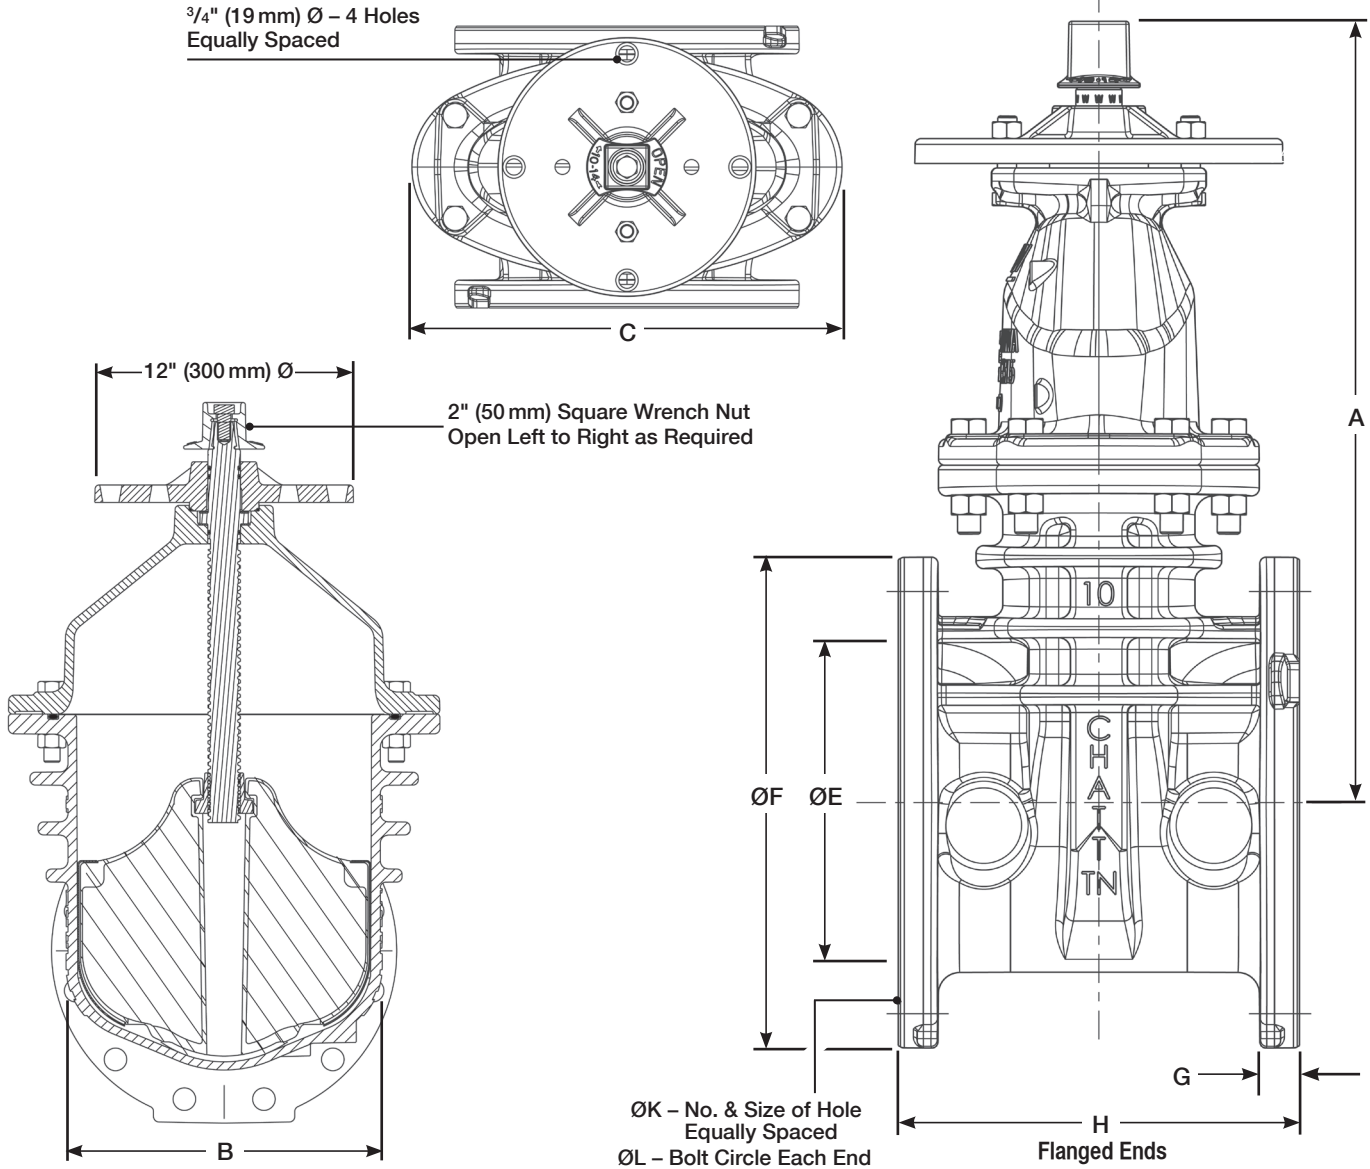

DIMENSIONS – inches (mm)

Valve Size	A	B	C	ØE	ØF	G	H	NO. - ØK	ØL	Turns to Open
4"/DN100	14.19 (360)	7.75 (210)	10.79 (274)	4.30 (109)	9.00 (229)	1.03 (26)	9.00 (229)	8 - 0.75 (19)	7.50 (191)	14
6"/DN150	18.00 (457)	9.97 (267)	13.50 (343)	6.30 (160)	11.00 (279)	1.07 (27)	10.50 (267)	8 - 0.88 (22)	9.50 (241)	20.5
8"/DN200	21.50 (546)	12.60 (336)	16.36 (416)	8.30 (211)	13.50 (343)	1.19 (30)	11.50 (292)	8 - 0.88 (22)	11.75 (298)	26.5
10"/DN250	25.50 (648)	16.48 (419)	19.99 (508)	10.30 (262)	16.00 (406)	1.29 (33)	13.00 (330)	12 - 1.00 (25)	14.25 (362)	33
12"/DN300	28.62 (727)	16.83 (427)	21.00 (533)	12.30 (312)	19.00 (483)	1.35 (34)	14.00 (356)	12 - 1.00 (25)	17.00 (432)	38.5

WEIGHT – lb. (kg)

Valve Size	4"/DN100	6"/DN150	8"/DN200	10"/DN250	12"/DN300
FLANGED	98 (44)	154 (70)	232 (105)	344 (156)	459 (208)



Copyright © 2017 Mueller Co., LLC. All Rights Reserved. The trademarks, logos and service marks displayed in this document herein are the property of Mueller Co., LLC, its affiliates or other third parties. Products marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com. These products are intended for use in potable water applications. Please contact your Mueller Sales or Customer Service Representative concerning any other application(s).