

TOTO®


MS854114EL(G) Eco UltraMax® One Piece Toilet, 1.28 GPF




MS854114EL(G) - Eco UltraMax® Toilet with SoftClose® Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Complete with SoftClose® toilet seat, or upgrade to a Washlet®.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



- Sleek high profile one piece design
- E-Max® Technology
- Powerful, quiet flush every time
- ADA Height for maximum comfort
- Wide, 2-1/8" computer designed trapway
- Large water surface

Elongated ADA compliant toilet with SoftClose® seat
Low consumption (1.28Gpf/4.8Lpf) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose® seat included.

■ MS854114EL

Less Sanagloss Ceramic Glaze.
Available in:
#01, #03, #11, #12

■ MS854114ELG

Sanagloss Ceramic Glaze.
Available in: #01

□ SS114

SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone

Trip Lever:

Standard #CP Chrome Plated
Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

 ADA Compliant

For installation condition with approach from the left hand side.

MS854114EL(G)

Eco UltraMax® One Piece Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO® E-Max® system offers outstanding commercial grade performance. The TOTO® low consumption one piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed
 (*E-Max® Technology*)

Min. Water Pressure:
 8 psi (Static)

Water Surface: 10-5/16" x 8-1/4"
 Trap Dia.: 2-1/8"
 Rough-in: 12"
 Trap Seal: 2-5/8"
 Warranty: One Year Limited Warranty
 Material: Vitreous China

Shipping Weight: **MS854114EL(G)**
 99 lbs.

Shipping Dimensions:
MS854114EL(G)
 31-3/8"L x 19-5/16"W
 x 28-15/16"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Listing / Approvals: c-UPC, City of Los Angeles, State of Massachusetts, and others. WaterSense compliant.



Meets the American Disabilities Act Guidelines and ANSI A117.1. For installation condition with approach from left-hand side. For installation condition with approach from the left hand side.

These dimensions and specifications are subject to change without notice.

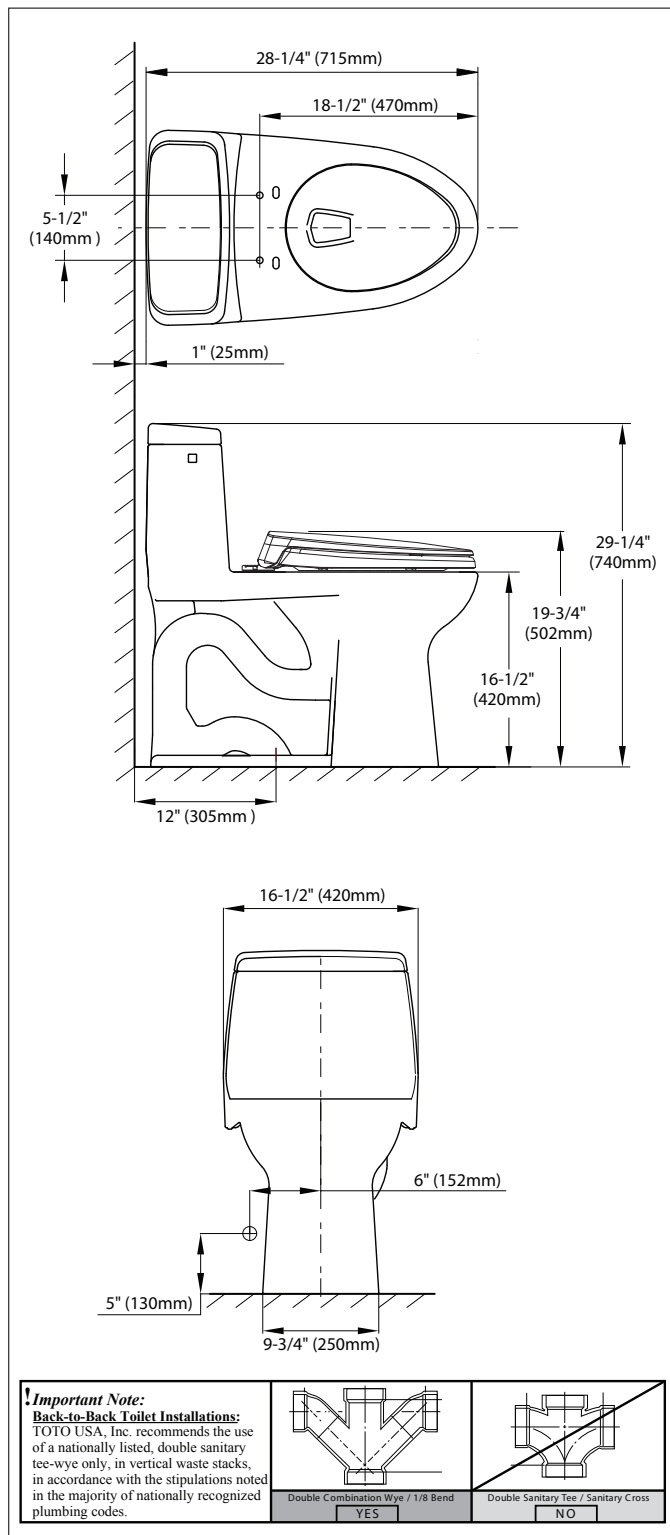

MS854114EL(G) - Eco UltraMax® ADA Height Toilet



TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 03/07 #A10374

Printed on recycled paper