

SUBMITTAL INFORMATION





ANGLE BALL VALVE BY ANGLE CHECK VALVE (1-1/2" METER)

GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

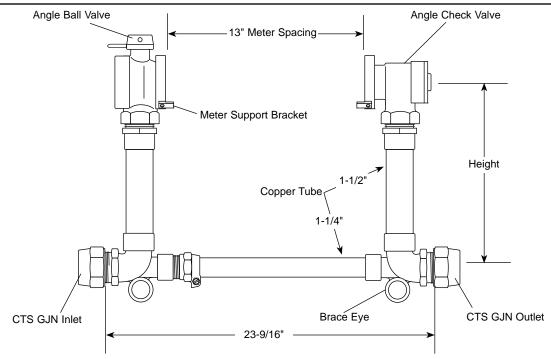

| SERVICE LINE CONNECTION | | Истоль | Approx. | Cara on Names | ✓ SUBMITTED |
|-------------------------|----------------|--------|----------|---------------------|-------------|
| CTS GJN INLET | CTS GJN OUTLET | HEIGHT | Wt. Lbs. | CATALOG NUMBER | ITEM(S) |
| 1-1/2" | 1-1/2" | 12" | 30 | VBH76-12-44-66-G-NL | |
| | | 15" | 31 | VBH76-15-44-66-G-NL | |
| | | 18" | 32 | VBH76-18-44-66-G-NL | |
| | | 21" | 32 | VBH76-21-44-66-G-NL | |
| | | 24" | 33 | VBH76-24-44-66-G-NL | |
| | | 27" | 33 | VBH76-27-44-66-G-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS NO C89833)
- The product has the letters "NL" cast into the main body for proper identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Constructed with Type K Copper and conforms to ASTM B-88, Copper Alloy #122
- · Bracing Eyes are standard
- Meter Support Brackets are standard
- All Ford Meter Setters are assembled with lead-free solder
- Padlock wing is standard on all Angle Meter Ball Valves or Key Valves

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167 http://www.fordmeterbox.com

03/13/13

| _ | • | | |
|----|-----|--------|------|
| Sı | ıhr | nitted | 1 Rv |
| | | | |