




ZEMS6203

For 3/4" Urinals

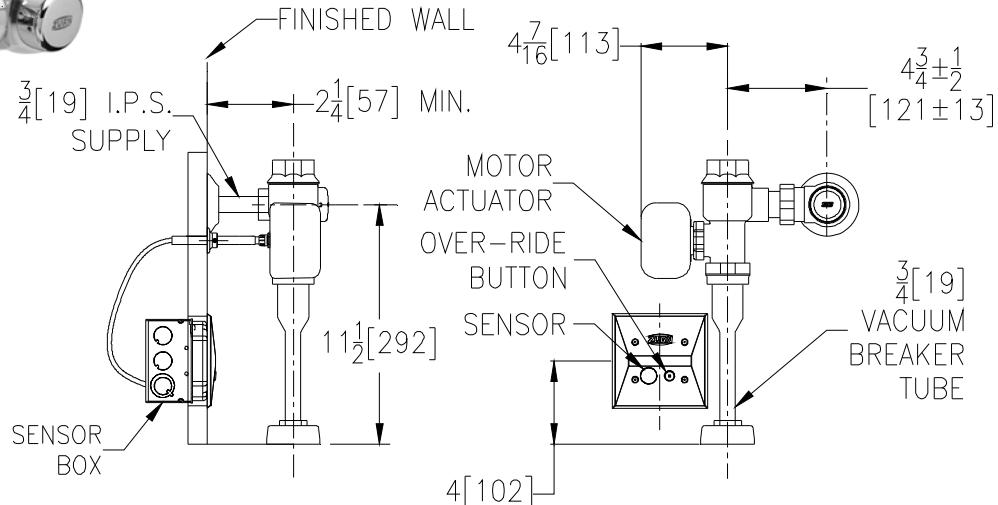

Flow Options

- EWS 0.5 gpf High Efficiency Flush
- WS1 1.0 gpf Low Consumption Flush
- _____ 1.5 gpf

Accessories

- XYV Less Vacuum Breaker
- YJ Split Ring Pipe Support
- YK Solid Ring Pipe Support
- YO Bumper on Angle Stop
- _____ Other

Power Supply Choices (Sold Separately)

- ACA-BA 6VDC Plug-in Power Converter (Up to 6 valves)
- HW6 Hardwired Power Converter (Up to 8 Valves)
- MJ Mini Junction Box

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6900-ACA-BA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541

www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED
3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

Metroflush® is a registered trademark of Zurn Industries, LLC.
AquaSense® is a registered trademark of Zurn Industries, LLC.

ENGINEERING SPECIFICATIONS

Exposed, quiet piston-type, chrome plated flushometer valve with a polished exterior.

➤ Piston Operated

Clog resistant filtered by-pass
Chloramine resistant
Dual seal

➤ Low lead brass alloy

➤ Actuator
ZEMS 6 VDC Motorized Actuator

➤ Automatic Sensor

Fully configurable sensor range adjustment
48 or 168 hour trap seal flush
Capacitive sensing push button override

➤ Control Stop

Internal siphon-guard protection
Vandal resistant stop cap
Sweat solder kit
Cast wall flange with set screw

➤ Vacuum Breaker

High back pressure
One piece hex coupling nut

➤ Internal seals

Chloramine resistant

➤ Adjustable tailpiece

➤ Spud coupling and flange for top spud connection