


UNDER COUNTER REFRIGERATORS


JUR24FRAR, JUR24FLAR – 23⁷/₈" x 34³/₈" x 23⁷/₈"

JUR24FRAC – 23⁷/₈" x 34³/₈" x 23⁷/₈"

PRODUCT DIMENSIONS

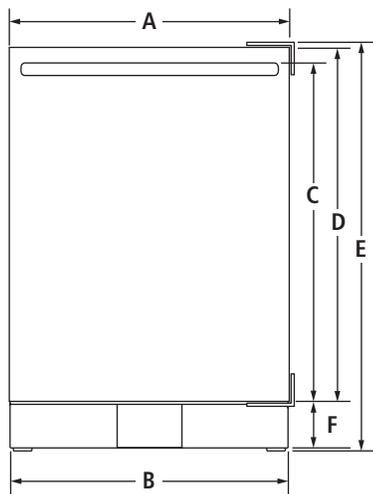

FRONT VIEW

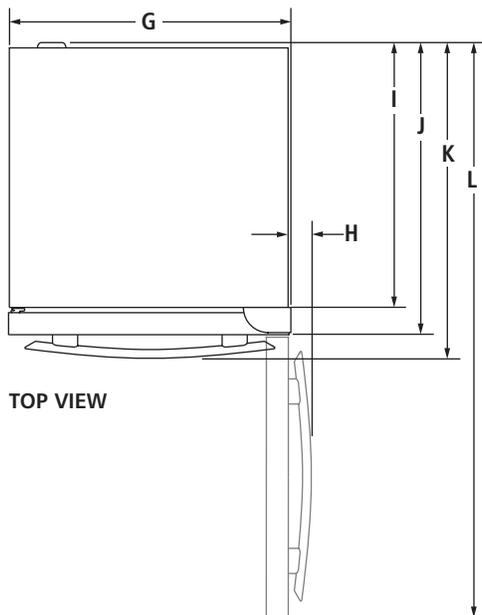

TOP VIEW

MODEL #		JUR24FRAR JUR24FLAR JUR24FRAC	
		in	cm
A	Width of door	23 ³ / ₄	60.3
B	Width of grille	23 ³ / ₄	60.2
C	Height to top of handle Pro-Style® Stainless*	28 ¹ / ₄	71.7
	Euro-Style Stainless	28	71.1
	Custom panel	**	**
D	Height of door	30 ¹ / ₈	76.6
E [†]	Height with hinge cover (min.)	34 ³ / ₈	87.4
F	Height of grille	3 ³ / ₄	9.4
G	Width with hinge cover	23 ⁷ / ₈	60.6
H	Width from side of refrigerator to handle – door open 90° Pro-Style® Stainless*	2 ⁵ / ₈	6.7
	Euro-Style Stainless	2 ¹ / ₈	5.3
	Custom panel	**	**
I	Depth without door	21 ⁵ / ₈	55.0
J [‡]	Depth with door	23 ⁷ / ₈	60.7
K	Depth with handle Pro-Style® Stainless*	26 ¹ / ₂	67.4
	Euro-Style Stainless	26	66.0
	Custom panel	**	**
L	Depth with door open 90°	47 ³ / ₄	121.4

*Requires optional Pro-Style® Stainless handle kit – W10588599. Each kit includes one Pro-Style® badge and one handle.

**For custom panel models, this depends on handle chosen.

[†]Add ⁵/₈" (1.6 cm) to the height dimension when leveling legs are fully extended.


[‡]Includes recommended ³/₄" (1.9 cm) custom panel thickness (JUR24FRAC).

UNDER COUNTER REFRIGERATORS

JUR24FRAR, JUR24FLAR – 23⁷/₈" x 34³/₈" x 23⁷/₈"

JUR24FRAC – 23⁷/₈" x 34³/₈" x 23⁷/₈"

DIMENSIONS AS INSTALLED

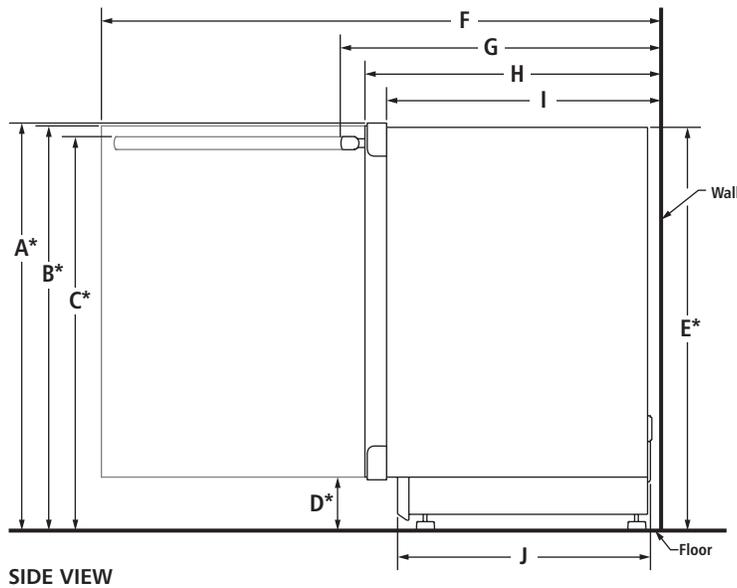

MODEL #		JUR24FRAR JUR24FLAR JUR24FRAC		
		in	cm	
A*	Height with hinge cover (min.)	34 ³ / ₈	87.4	
B*	Height to top of door (min.)	34 ¹ / ₈	86.8	
C*	Height to top of handle (min.) Pro-Style® Stainless**	28 ¹ / ₄	71.7	
	Euro-Style Stainless	28	71.1	
	Custom panel	†	†	
D*	Height to top of grille (min.)	4	10.2	
E*	Height of recessed refrigerator (min.)	34 ¹ / ₈	86.8	
F	Depth with door open 90° (min.)	47 ³ / ₄	121.4	
	G	Depth with handle (min.) Pro-Style® Stainless**	26 ¹ / ₂	67.4
		Euro-Style Stainless	26	66.0
Custom panel†		†	†	
H‡	Depth with door (min.)	24	60.9	
I	Depth without door (min.)	21 ⁵ / ₈	55.0	
J	Depth of grille (min.)	20 ³ / ₄	52.7	


*Add 5/8" (1.6 cm) to the height dimension when leveling legs are fully extended.

**Requires optional Pro-Style® Stainless handle kit – W10588599. Each kit includes one Pro-Style® badge and one handle.

†For custom panel models, this depends on handle chosen.

‡Includes recommended 3/4" (1.9 cm) custom panel thickness (JUR24FRAC).

PANEL DIMENSIONS

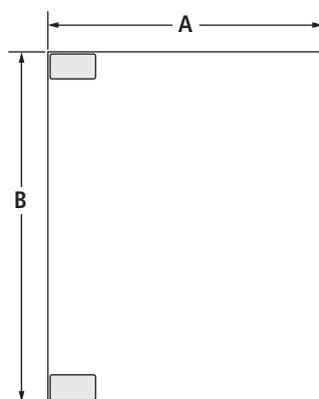

MODEL #		JUR24FRAC	
		in	cm
A	Overall width of panel	23 ³ / ₄	60.3
B	Overall height of panel	30 ¹ / ₈	76.6

CUSTOM PANEL REQUIREMENTS

- Weight (max.): 10 lb (4.5 kg)
- Thickness: 3/4" (1.9 cm)


NOTE: Refer to the product Use & Care Guide for complete custom overlay dimensions and installation instructions.

UNDER COUNTER REFRIGERATORS


JUR24FRAR, JUR24FLAR – 23⁷/₈" x 34³/₈" x 23⁷/₈"

JUR24FRAC – 23⁷/₈" x 34³/₈" x 23⁷/₈"


OPENING/CLEARANCE DIMENSIONS

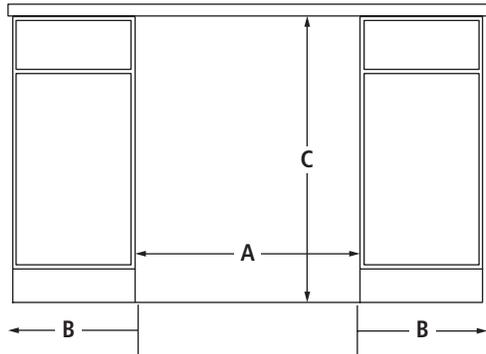

FRONT VIEW

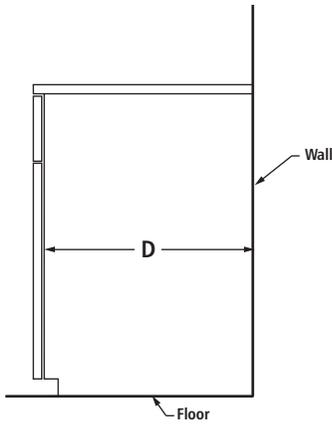

SIDE VIEW



BACK VIEW

MODEL #		JUR24FRAR JUR24FLAR JUR24FRAC	
		in	cm
A	Width (min.)	24	61.0
B	Minimum width from hinged side of refrigerator to fixed wall – door open 90°	1 ⁵ / ₈	4.0
C	Height (min.)	34 ³ / ₈	87.3
D	Depth (min.)	24	61.0

VENTILATION REQUIREMENTS

For proper ventilation, allow 1/4" (0.6 cm) space on the top and each side.

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Minimum length of the power cord is 63" (160.0 cm). Do not use an extension cord.