Rowan™ High-Efficiency Toilet, 1.6GPF & 1.0GPF

FEATURES

- Dual-Max® flushing system, high-efficiency (1.6GPF/6.0LPF & 1.0GPF/3.8LPF)
- Elongated bowl
- Universal Height
- Close coupled, elongated front bowl and tank set, less toilet seat
- Chrome push-button
- 12" Rough-in

MODELS

CST406MF

COMPONENTS

- C406F Elongated Front Bowl
- ST405M Tank and Cover only
- SS114 SoftClose® seat (sold separately)

COLORS/FINISHES

 Standard #01 Cotton #12 Sedona Beige

PRODUCT SPECIFICATION

The two-piece, universal height, high-efficiency Dual-Max flushing system toilet shall be 1.6GPF/1.0GPF. Toilet shall have high-profile tank, elongated front bowl and chrome push-button. Toilet shall be WaterSense certified. Toilet shall be TOTO Model CST406MF



QUAMAX

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance





Rowan™ High-Efficiency Toilet, 1.6GPF & 1.0 GPF

SPECIFICATIONS

• Water Use 1.6 GPF & 1.0GPF (6.0 LPF & 3.8LPF)

Flush System Dual-Max
Min. Water Pressure 8 psi (flowing)
Water Surface 5-1/2" x 7-1/4"

Trap Diameter 1-7/8"Rough-in 12"Trap Seal 2"

• Warranty One Year Limited Warranty

 Material Vitreous china
Shipping Weight C406F - 53lbs ST405M - 35lbs


Shipping Dimensions C406F 28-1/2" x 16" x 17"


ST405M 20-1/2" X 8" X 18-3/4"


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

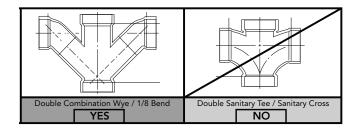

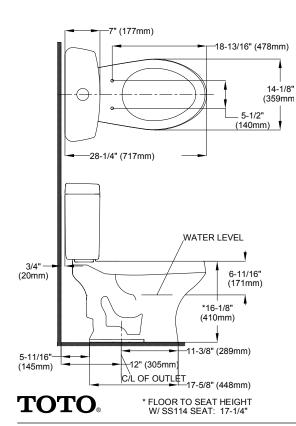



These dimensions and specifications are subject to change without notice