

WATER HAMMER ARRESTERS

660-GT SERIES

MiniRester™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 660-GT Series piston-type water hammer arresters shall be installed where required on supply lines to quick closing valves/faucets. Water hammer arresters shall be specifically sized and have sufficient volume of air to dissipate the calculated kinetic energy generated by closing residential or commercial faucets. Arresters shall be installed on both hot and cold supply lines where applicable. Arresters shall be approved for installation with no access panel required.

MATERIALS

- Arrester body:** 304 stainless steel tube
- Piston:** poly piston with two EPDM o-rings
- Tee body:** No Lead brass (unfinished)

WORKING LIMITS

- Max working temperature:** 250°F
- Max working pressure:** 350 PSIG
- Burst tested:** to 1,500 PSIG

INSTALLATION

Install MiniRester within 6 feet of culprit valve or faucet. Approved for installation with no access panels.

CERTIFICATIONS/APPROVALS

Certified by ASSE to the ANSI/ASSE 1010-2004 standard, AA size CUPC listed to UPC and Canadian codes and standards


DIMENSIONS

- Overall height 4"
- Trunk width 2"
- Chamber width 7/8"



660-GTC1B

660-GTX2B

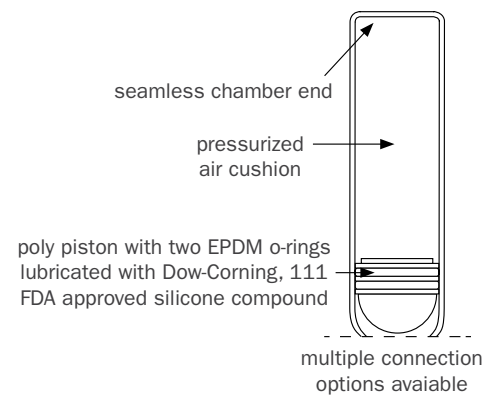

Choose Item Number

- 660-GTC0B** = 1/4" OD compression tee
- 660-GTC1B** = 3/8" OD compression tee
- 660-GTB** = 5/8" OD compression tee
- 660-GTX2B** = 1/2" F1807 PEX Crimp tee
- 660-GTW2B** = 1/2" F1960 PEX Grip tee
- 660-TKB** = ballcock thread tee