

LINEAR SHOWER DRAIN

823 SERIES

StreamLine™

SPECIFICATION

Sioux Chief 823 Series StreamLine™ pre-sloped, linear shower/floor drains shall be used where necessary in drainage systems. Drain shall have a seamless, one-piece body with flat bottom for stability and offset 2" Sch. 40 hub connection. Drain shall employ a one-piece stainless steel clamping collar to make a mechanical joint between drain body and waterproofing membrane. Stainless steel strainer or tile insert shall meet applicable load and flow requirements for intended use.

MATERIALS

Drain body/connection: PVC

Clamping collar: stainless steel

Strainer: stainless steel, brushed finish

INSTALLATION

Install per manufacturer's instructions (provided), ANSI A108 standards and TCNA guidelines.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



823-32PSS


STRAINER FREE AREA

Length:	24"	32"	40"	60"
Free Area:	11.8 in ²	17.1 in ²	20.4 in ²	34.2 in ²

DIMENSIONS

A: Connection	2" PVC Sch. 40 hub			
B: Drain body length	24"	32"	40"	60"
C: Strainer length	21¾"	29¾"	37¾"	57¾"
D: Drain body thickness	1¼"			
E: Connection offset	15¾"	19½"	23¾"	33¾"
F: Drain body width	4½"			
G: Body edge to strainer	1⅝"			
H: Strainer width*	2¼"			

*Tile-in tray is 2" wide

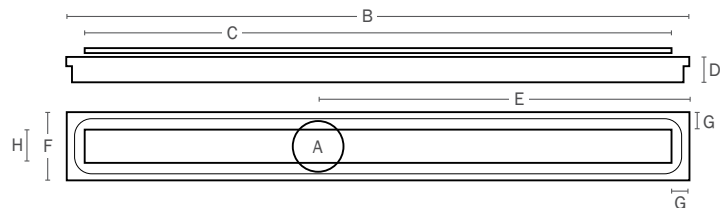

Create Item Number

823-AB

e.g. **823-32PSS**: 32" linear shower drain with slotted strainer

CONNECTION SIZE A

24P = 24" drain body length

32P = 32" drain body length

40P = 40" drain body length

60P = 60" drain body length

STRAINER PATTERN B

SS = Slotted pattern 

ST = for Tile Insert