


- FOR USE IN WATER WELL SYSTEMS
- Third party certified to NSF/ANSI 372.


CLAYTON MARK®


6300 No Lead Brass Check Valve

Features:

- The Buna-N rubber coated poppet seals under high & low pressure applications.
- Delrin Stem Guide to improve flow.
- Self locking nut is vibration proof.
- Stainless steel spring.
- 400 PSI rated (WOG).
- For cold water applications only.
- Hex ends for easy installation.

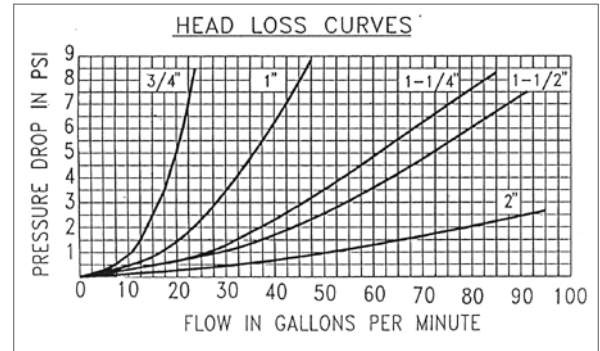


Part Number	Size	Enters Casing	Ctn Qty
6300-3/4	3/4"	1-1/2"	48
6300-1	1"	2"	35
6300-11/4	1-1/4"	2-1/2"	24
6300-11/2	1-1/2"	3"	20
6300-2	2"	3-1/2"	12



5300 No Lead Brass Check Valve

Features:

- Highly finished no lead brass body with a flat seated poppet to withstand increased water pressure for a continuous period of time.
- 400 PSI (W.O.G.)
- For cold water applications only.
- Corrosion resistant, stainless steel poppet core on 5300-1/2".
- No Lead Brass poppet on 5300-2 1/2, 3 & 4".
- Not suitable for all types of oil and gas.
- Heavy hex ends for easy installation.

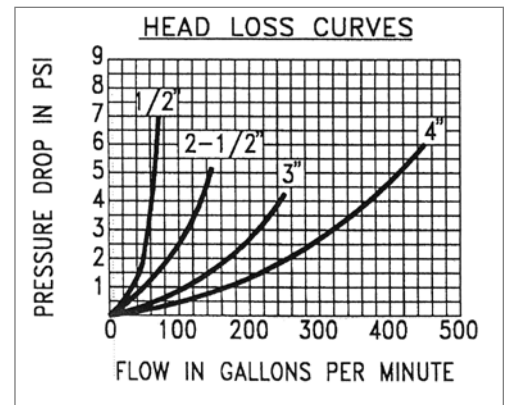

Part Number	Size	Enters Casing	Ctn Qty
5300-1/2	1/2"	1-1/2"	48
5300-21/2	2-1/2"	5"	1
5300-3	3"	6"	1
5300-4	4"	8"	1