



TOGGLE BOLTS

- Zinc Plated, Carbon Steel, Fully Threaded
- Snap open, spring action zinc plated wing nut included
- For use in hollow wall installations

Properties/Standards

Material Properties: ASME B18.6.3

Material: Carbon Steel

Material Tensile Strength: 60 ksi


Thread Dimensions: ASME B18.6.3

Plating: ASTM F1941 Fe/Zn 3AT

Packaging: Bagged (See Qty/per below)



Dimensional Specifications

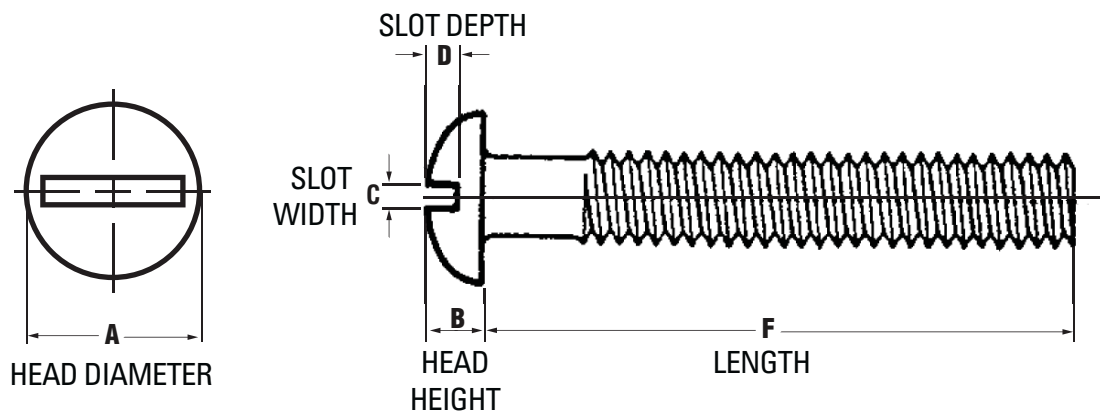

Nominal Size	Threads Per Inch	A. Head Diameter		B. Head Height		C. Slot Width		D. Slot Length		F. Length	ALT #	Master #	Pack Qty
		max	min	max	min	max	min	max	min				
1/4"	20	0.472	0.443	0.175	0.160	0.075	0.064	0.109	0.082	3"	PS000731	4566047	10
1/4"	20	0.472	0.443	0.175	0.160	0.075	0.064	0.109	0.082	4"	PS000732	4566048	10
1/4"	20	0.472	0.443	0.175	0.160	0.075	0.064	0.109	0.082	6"	PS000733	4566049	10
3/8"	16	0.708	0.670	0.256	0.237	0.094	0.081	0.155	0.117	3"	PS000734	4566050	10
3/8"	16	0.708	0.670	0.256	0.237	0.94	0.081	0.155	0.117	4"	PS000735	4566051	10
3/8"	16	0.708	0.670	0.256	0.237	0.94	0.081	0.155	0.117	6"	PS000736	4566052	10

*General Note: Per ASME B18.6.3 all bolts 6" or less in length are fully threaded.