


For Residential and Commercial Applications


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

KTCR1900 & KTCR1901 1/4 Turn Dual Outlet Ball Stop – Compression Inlet

Use: For use only in potable water distribution systems, hot and cold, in accessible locations only.

Design Features:

- **Machined brass ball** is specially engineered and mated with fluorocarbon seats to provide smooth operation without freeze-ups even after long periods of non-use
- **Two high-performance o-rings** withstand high temperatures and corrosion from harsh water environments
- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Brass stems** are assembled from the inside out with two o-rings to ensure safe, reliable performance
- **Plated stems** provide corrosion resistance and prevent o-ring damage after long periods of non-use
- **Exclusive, metal handle** is designed for durability, corrosion resistance, and a sleek appearance
- **Easy-to-remove handle** with screw attachment helps protect against accidental stop operation during rough-ins
- **100% leak tested**
-  **No Lead**

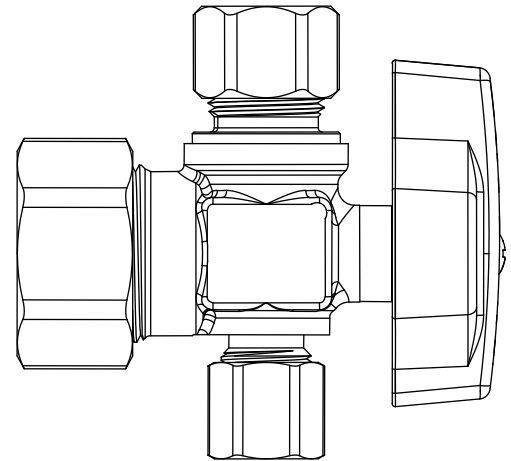

Operating Specifications:

Temperature: 40° - 180° F
Pressure: 125 PSI maximum

MATERIAL SPECIFICATIONS	
Body	Brass, chrome plated
Stem	Brass, plated
Ball	Brass, plated
Seats	Fluorocarbon
Stem o-ring	Rubber
Handle	Zinc, die cast plated
Screw	Steel, zinc plated
Compression Sleeve	Brass
Compression Nut	Brass, chrome plated


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

KTCR1900 & KTCR1901 1/4 Turn Dual Outlet Ball Stop – Compression Inlet

Part Listing:

- | | | |
|--------------------------|--------------|--|
| <input type="checkbox"/> | KTCR1900X R1 | 1/2" nom compression x 3/8" OD compression x 1/4" OD compression, rough brass, window tray |
| <input type="checkbox"/> | KTCR1901X R1 | 1/2" nom compression x 3/8" OD compression x 3/8" OD compression, rough brass, window tray |

PART DIMENSIONS (Inches)				
Model	DIM. A	DIM. B	DIM. C	DIM. D
KTCR1900X	1.21	2.17	2.40	.94
KTCR1901X	1.21	2.24	2.40	.94

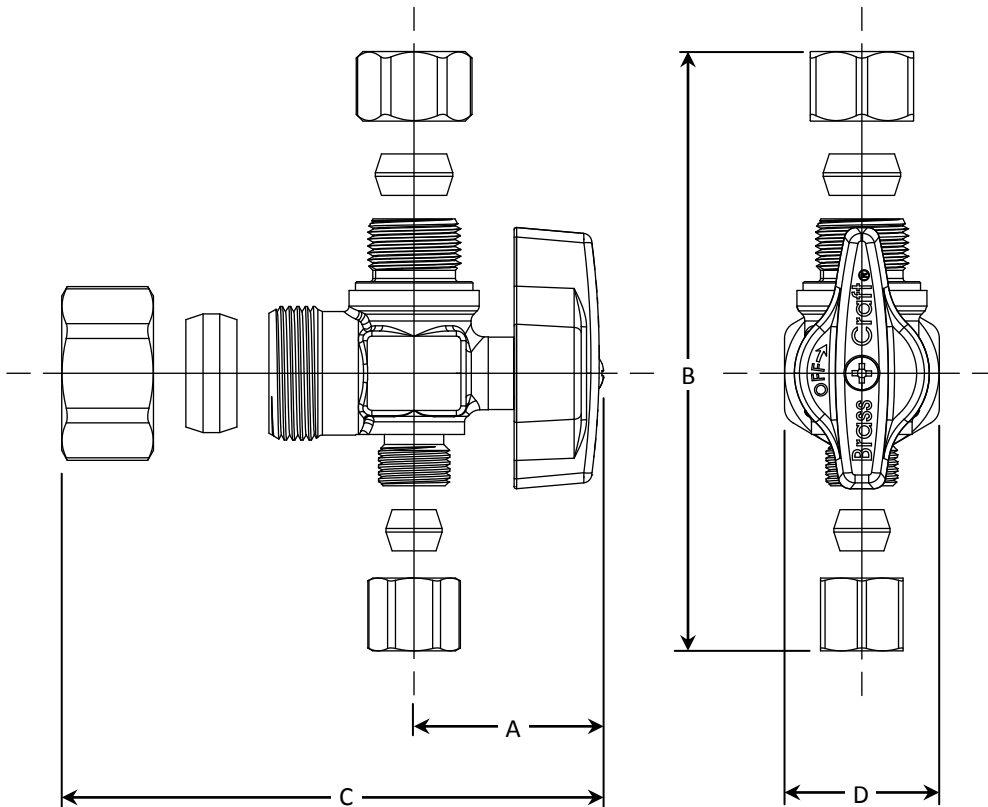

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (Including NSF 61)(File 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (Including NSF 61)(File 204593)
- No-lead product CSA listed to NSF 372 (Class 6853-01)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

400.128 KTCR1900 & KTCR1901 Dual Outlet Ball Stop - Compr All Ends REV 02/16

BrassCraft®

© 2016 BrassCraft Mfg.