

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

BRPX04/14X Multi-Turn Straight Stop – Barbed PEX x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop.

Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Knurled oval handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** with screw attachment helps protect against accidental stop operation during rough-ins
- **PEX end** designed to ASTM F1807
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807




Operating Specifications:

Temperature: 40° - 160° F
Pressure: 125 PSI maximum



STOP MATERIAL SPECIFICATIONS	
Body	Brass or brass, plated
Stem	Brass or brass, plated
Bib & Packing Washer	Rubber
Packing Nut	Brass or brass, plated
Handle	Polycarbonate
Handle Screw	Zinc-plated steel
Plastic Sleeve	Delrin
Compression Nut & Sleeve	Brass

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
BRPX04	1.67	2.19
BRPX14	1.67	2.19

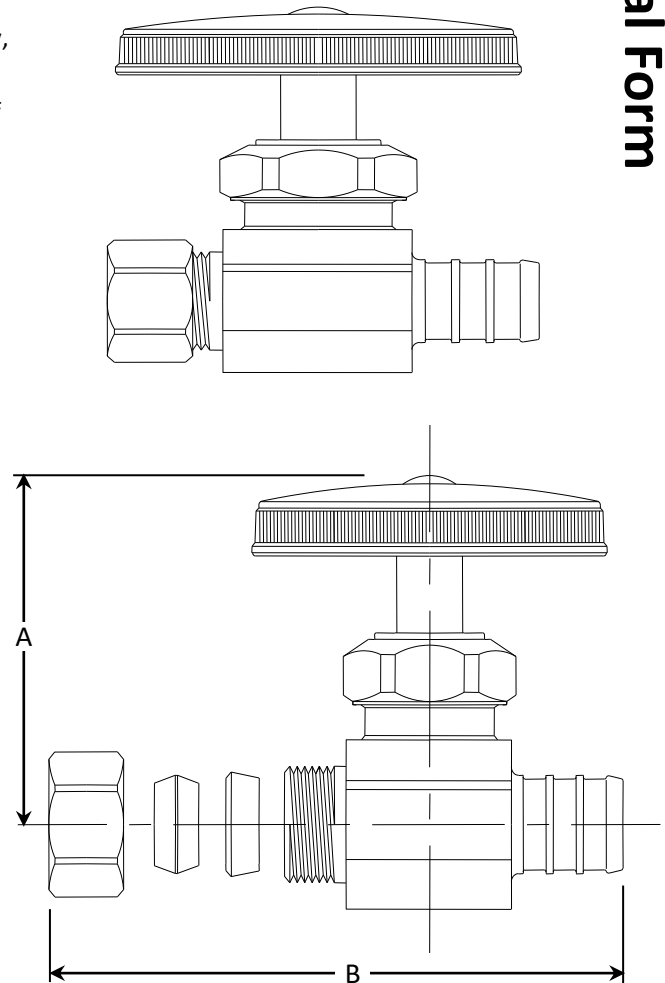

Part Listing:

- BRPX04X C 1/2" nom barb (for PEX) x 1/4" OD compression, chrome
- BRPX04X R 1/2" nom barb (for PEX) x 1/4" OD compression, rough brass
- BRPX14X C 1/2" nom barb (for PEX) x 3/8" OD compression, chrome
- BRPX14X R 1/2" nom barb (for PEX) x 3/8" OD compression, rough brass
- BRPX14TX CB 1/2" nom barb (for PEX) x 3/8" OD compression, chrome, bulk
- BRPX14TX CBT 1/2" nom barb (for PEX) x 3/8" OD compression, chrome

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®