

## 150# RED RUBBER FULL FACE & RING GASKETS

### Features


Red rubber gaskets are manufactured from Styrene-Butadiene or SBR for short. This synthetic material was developed as an alternative to natural rubbers. The red rubber gaskets are recommended for service in cold and hot water, air, steam, and some weak acids. It should not be used with strong acids, oils, grease, and chlorates. It offers little resistance to ozone and to the majority of hydrocarbons.

### Standards

- Meets ASME B16.21 for 150# gaskets
- Dimensions: ASME B16.5  
(Except 30" which is ASME B16.47 Series A)

### Service Limits

- Max. Temperature: 170°F (77°C)
- Min. Temperature: -20°F (-29°C)
- Max. Pressure: 200 PSIG (13.8 Bar)
- Max Pressure x Temperature (PxT) - 20,000 (°F x PSIG)

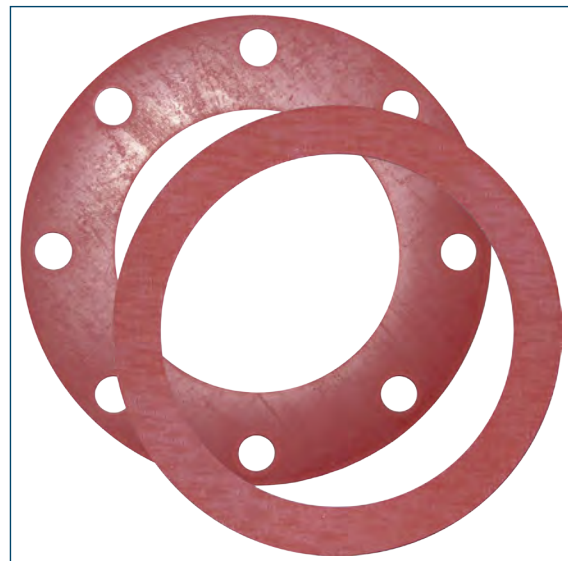

### Typical Physical Properties

Property	Value
Durometer Hardness	75 Shore A ±5
Tensile	400 PSI
Elongation	150%
Finish	Smooth
Compression Set for 22 Hrs @ 158°F (70°C) (ASTM D395B)	35%
Heat Aging for 94 Hrs @ 158°F (70°C) (ASTM D573)	
Change in Hardness	+5 Shore A
Change in Tensile	-15%
Change in Elongation	-35%

Properties and application parameters shown on this data sheet are typical. Failure to select proper sealing products could result in property damage and/or serious personal injury.

### Figure Number Matrix

FNW R 1 FFG A Size					
PRESSURE	TYPE	THICKNESS	SIZE CODE		
150# = 1	Ring Gasket = RG	1/16" = 116	1/2 = D	2 = K	6 = U
300# = 3	Full Face Gasket = FFG	1/8" = A	3/4 = F	2-1/2 = L	8 = X
			1 = G	3 = M	10 = 10
			1-1/4 = H	4 = P	12 = 12
			1-1/2 = J	5 = S	14 = 14
					16 = 16
					18 = 18
					20 = 20
					24 = 24
					30* = 30

\* NOTE: The 30" red rubber gaskets are available in 150#, 1/8", full face only (FNWR1FFGA30).

DOC: FNWR06 Ver. 7/2013

© 2013 - FNW. All rights reserved.

The FNW logo is a trademark of Ferguson Enterprises, Inc., PL Sourcing, PO Box 2778, Newport News, VA 23609

[www.fnw.com](http://www.fnw.com)

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. Always verify that you have the most recent product specifications or other documentation prior to the installation of these products.