

# QS-style Copper Fitting Adapter

Submittal Information

Revision B: May 24, 2010

## Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

## Technical Data

Material:	CA 360 Brass
Maximum Temperature (no pressure):	220°F (104°C)
Maximum Pressure:	125 psi (8.6 bar)

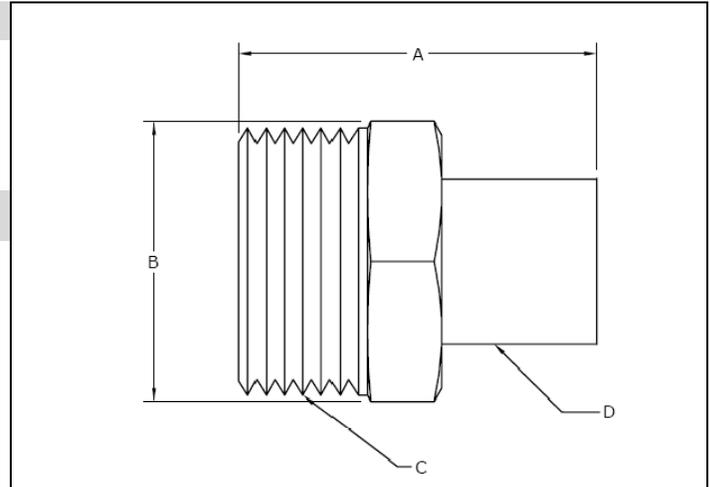

## Product Information and Application Use

The Uponor QS-style Copper Adapters, combined with the appropriate QS-style Fitting Assembly, transition Wirsbo hePEX™ tubing to ½", ¾" or 1" copper pipe in hydronic heating applications.

✓	Description	Part Number	A	B	C	D	Weight
	QS-style Copper Fitting Adapter, R20 x ½" Copper	A4342050	1.39"	1.0625" HEX	R20	0.50" CU	0.15 lbs.
	QS-style Copper Fitting Adapter, R20 x ¾" Copper	A4342075	1.64"	1.0625" HEX	R20	0.75" CU	0.20 lbs.
	QS-style Copper Fitting Adapter, R25 X ¾" Copper (for ¾" and ⅝" tubing only)	A4342575	1.80"	1.3750" HEX	R25	0.75" CU	0.28 lbs.
	QS-style Copper Fitting Adapter, R25 X 1" Copper (for ¾" and ⅝" tubing only)	A4342510	1.90"	1.3750" HEX	R25	1.00" CU	0.29 lbs.

## Installation

The corresponding compression fitting threads onto the R20 or R25 thread to adapt to copper. For additional information, refer to the Uponor Radiant Floor Heating Installation Handbook.

## Standards

ASTM F877

## Codes

R20: ISO 228-G ¾ B; R25: ISO 222-G 1 B

## Listings

NSF-rfh

## Related Applications

Radiant Heating and Cooling Systems  
Snow and Ice Melting Systems  
Permafrost Protection Systems  
Turf Conditioning Systems

## Contact Information

Uponor, Inc.  
5925 148th Street West  
Apple Valley, MN 55124 USA  
Phone: (800) 321-4739  
Fax: (952) 891-2008  
www.uponor-usa.com

Uponor Ltd.  
2000 Argentia Rd., Plaza 1, Ste. 200  
Mississauga, ON L5N 1W1 CANADA  
Phone: (888) 994-7726  
Fax: (800) 638-9517  
www.uponor.ca