Installation and Care Guide

Freestanding Bath

K6368-0 ✔


Retain serial number for reference:
Conserver le numéro de série pour référence:
Guarde el número de serie para referencia:_____

Français, page "Français-1"
Español, página "Español-1"

THE BOLD LOOK OF KOHLER®

1237787-2-D


Tools and Materials



Safety Glasses


Tape Measure


Pencil

Plus:
- Drop Cloth
- Shims
- Short Ø 1-1/2" PVC Pipe or Coupling
- 2x4
- Wood Blocks
- Gloves


Silicone Sealant


Silicone Adhesive


Level

Before You Begin

NOTICE: Adequate floor support must be provided. Note the **model number** on the back of the bath, then visit the product page at www.kohler.com for additional information.


NOTICE: Do not support the load weight of the bath by the rim.


NOTICE: Before installing a rim-mount bath faucet, refer to the specification sheet on the product page at www.kohler.com.


NOTICE: For -2M Music Models: Refer to the installation instructions included with the amplifier for wiring and installation details. Position the amplifier anywhere within the shroud or in a remote location. If installed within the shroud, the amplifier will need to remain plugged into the electrical outlet at all times.


NOTICE: For -2M Music Models: This installation requires installation of an electrical outlet within 24" (610 mm) of the amplifier location. Refer to the amplifier installation instructions.

- ☐ Observe all local plumbing and building codes.
- ☐ Unpack and inspect the bath and components for damage. Return the bath and components to the carton until installation.
- ☐ To simplify future maintenance, make sure all plumbing connections around the bath are easily accessible.
- ☐ Carefully plan moving the bath into the installation area. This bath will not easily fit through doorways.
- ☐ Two people are needed to install this product.
- ☐ Install the bath to an adequately supported, level finished floor.
- ☐ This bath is designed for freestanding installation only.
- ☐ If installing a rim-mount faucet, make sure there is no interference with the drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the rim.
- ☐ Illustrations shown may not look like your actual product but they still apply for this installation.
- ☐ This bath conforms to CSA B45.5/IAPMO Z124. All dimensions are nominal.

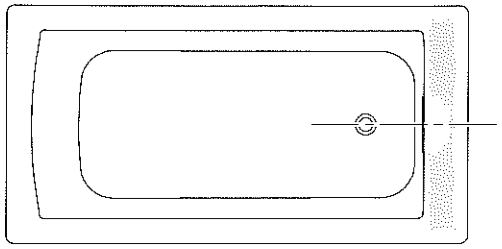

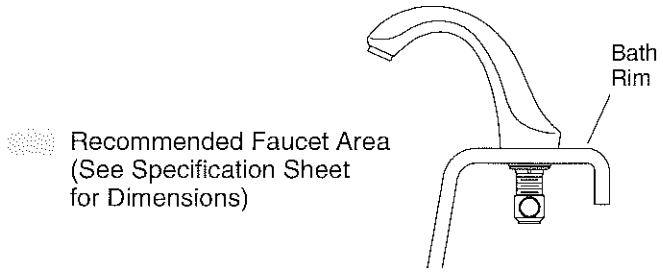

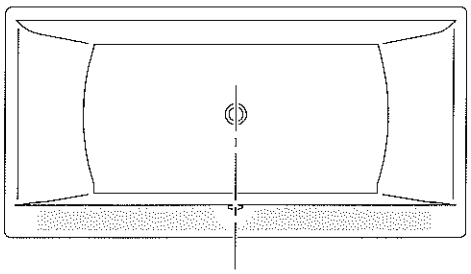

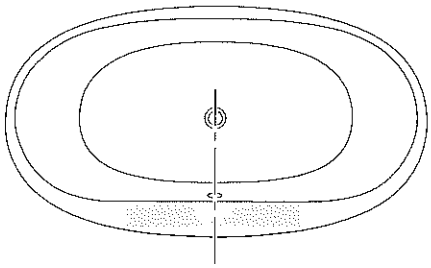

1. Prepare the Rim-Mount Faucet (Optional)


NOTICE: Before installing a rim-mount bath faucet, refer to the specification sheet on the product page at www.kohler.com for faucet area dimensions for your model.


NOTICE: To accommodate the bath shroud, use flexible connections to attach the water supplies to a rim-mount faucet.

- ☐ Position the faucet in the desired location along the bath. Ensure the faucet will not interfere with the drain and overflow.

NOTE: Refer to the installation instructions packed with the faucet to determine faucet hole size.

- ☐ Use a pencil to mark the faucet centerlines for drilling.
- ☐ Carefully drill the faucet holes.

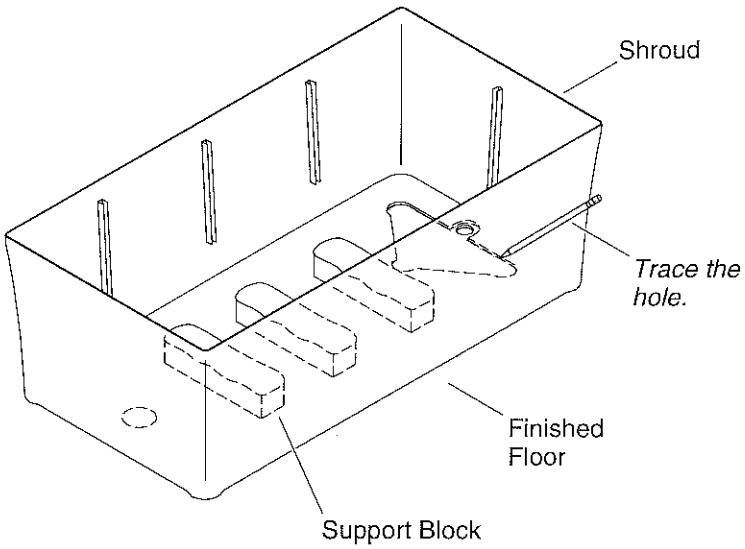

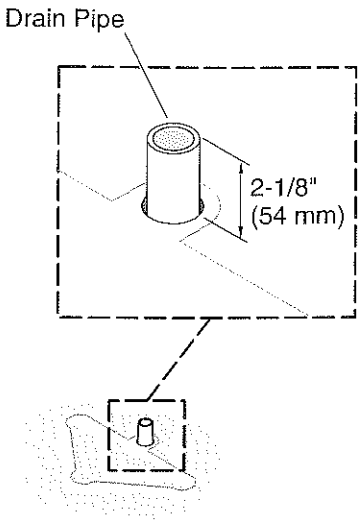

2. Prepare the Site

NOTICE: Measure your product for site preparation. Note the **model number** located on the back of the bath, then visit the product page at www.kohler.com for additional information.


NOTICE: Do not attempt to remove the hardened casting material covering the wooden support blocks. The casting material is required to properly position and install the bath.

IMPORTANT! To ensure a successful installation, install the bath on a level finished floor.

IMPORTANT! Make sure the subfloor offers adequate support for the bath.

- ☐ Remove and discard the thin plastic film covering the support blocks.
- ☐ Temporarily position the shroud in the installation location.
- ☐ Verify the shroud is level. If needed, position shims under the shroud.
- ☐ Using a pencil, trace the shroud hole on the floor.
- ☐ Remove the shroud and set aside.
- ☐ Secure any shims to the floor.
- ☐ Position and install a standard PVC or brass bath drain pipe. Install the drain pipe so it extends 2-1/8″ (54 mm) above the finished floor.


NOTE: The drain pipe may need to be trimmed, depending on the drain installed.

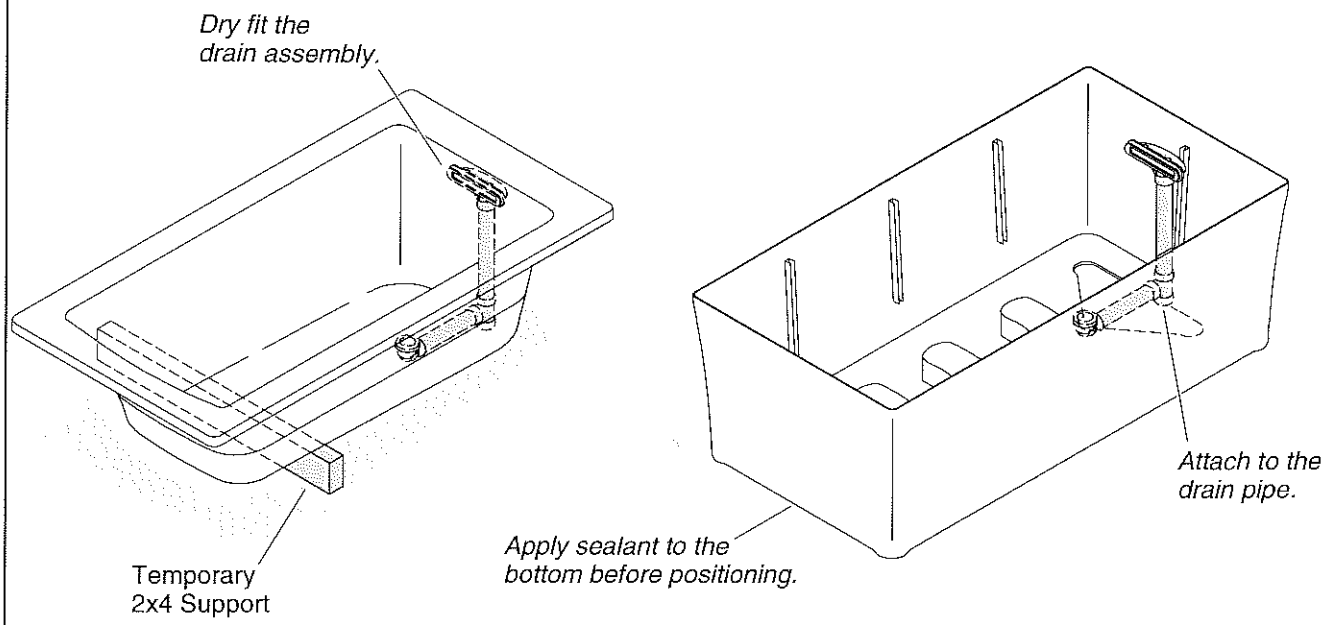


3. Prepare the Bath

NOTICE: Refer to the drain instructions to dry fit to the bath. **Do not cement and complete the drain installation until instructed to do so.**

- ☐ Dry fit the drain and overflow assembly to the bath. Refer to the drain instructions. Do not apply sealant or cement to the drain components at this time.
- ☐ Temporarily position a 2x4 in the installation area to support the bottom of the bath opposite the drain.
- ☐ With help, position the bath (without the shroud) and drain assembly over the drain pipe. Trim the drain pipe as needed.
- ☐ Loosen the drain and overflow connections from the bath.
- ☐ Remove the bath, leaving the drain and overflow assembly attached to the drain pipe.
- ☐ Remove the temporary 2x4 support from the installation area.
- ☐ Cement and assemble the drain and overflow components. Connect the drain to the drain pipe.
- ☐ Apply slow-drying silicone adhesive to the bottom of the shroud.
- ☐ Carefully position the shroud over the drain, aligning the hole with the traced mark on the floor.

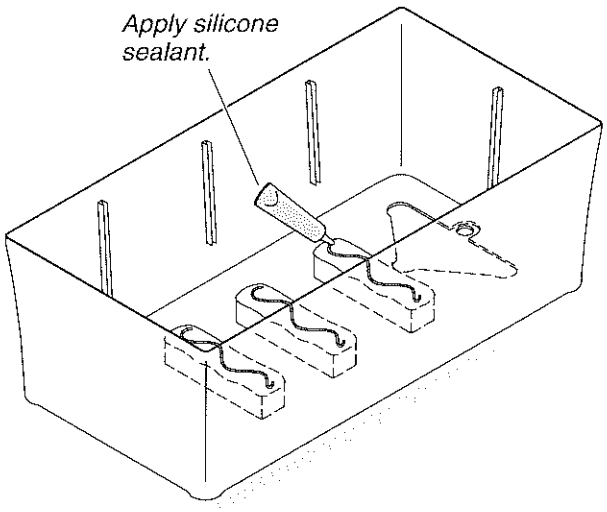

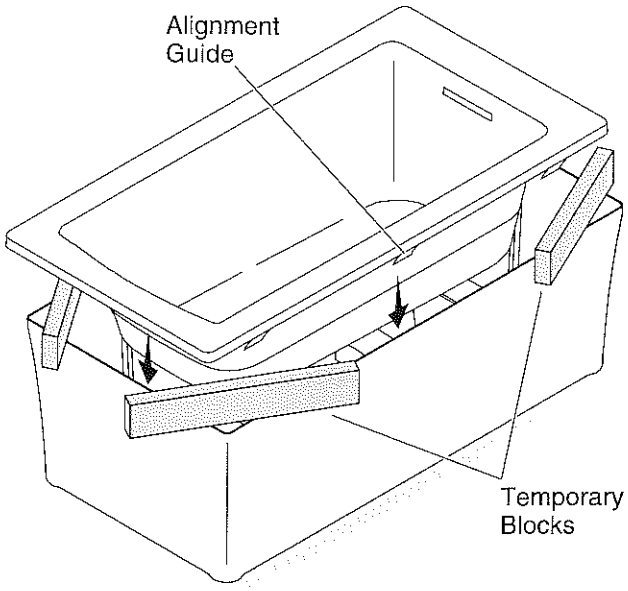

4. Install the Bath

NOTICE: For -2M Music Models: Refer to the installation instructions included with the amplifier for wiring and installation details. Position the amplifier anywhere within the shroud or in a remote location. If installed within the shroud, the amplifier will need to remain plugged into the electrical outlet at all times.

- ☐ Apply a generous amount of silicone sealant to the support blocks on the base of the shroud.
- ☐ Apply sealant to both sides of the gaskets on the drain and overflow assembly.

NOTE: To provide access for securing the faucet connections, temporarily position block spacers at the corners between the shroud and the bath rim. Position the blocks to avoid damaging the alignment guides located under the bath rim.

- ☐ With help, carefully lift the bath into place over the shroud and onto the block spacers.
- ☐ Secure all faucet connections and fittings.
- ☐ Carefully remove the blocks and make sure the bath rim engages the top of the shroud on all sides.
- ☐ Install the drain flange and overflow cover according to the drain instructions.
- ☐ Close the bath drain. Fill the bath to the overflow, and check for leaks.
- ☐ If desired, apply a thin, continuous bead of clear or color-matched silicone sealant to the seam between the shroud and the finished floor.

Care and Cleaning

For best results, keep the following in mind when caring for your KOHLER product:

- Always test your cleaning solution on an inconspicuous area before applying to the entire surface.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaner. Rinse and dry any overspray that lands on nearby surfaces.
- Do not allow cleaners to soak on surfaces.
- Use a soft, dampened sponge or cloth. Never use an abrasive material such as a brush or scouring pad to clean surfaces.

For detailed cleaning information and products to consider, visit www.kohler.com/clean. To order Care & Cleaning information, call 1-800-456-4537.

Warranty

ONE-YEAR LIMITED WARRANTY

KOHLER plumbing products are warranted to be free of defects in material and workmanship for one year from date of installation.

Kohler Co. will, at its election, repair, replace or make appropriate adjustment where Kohler Co. inspection discloses any such defects occurring in normal usage within one (1) year after installation. Kohler Co. is not responsible for removal or installation costs. **Use of in-tank toilet cleaners will void the warranty.**

To obtain warranty service contact Kohler Co. either through your Dealer, Plumbing Contractor, Home Center or E-tailer, or by writing Kohler Co., Attn.: Customer Care Center, 444 Highland Drive, Kohler, WI 53044, USA, or by calling 1-800-4-KOHLER (1-800-456-4537) from within the USA and Canada, and 001-800-456-4537 from within Mexico, or visit www.kohler.com within the USA, www.ca.kohler.com from within Canada, or www.mx.kohler.com in Mexico.

IMPLIED WARRANTIES INCLUDING THAT OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. KOHLER CO. AND/OR SELLER DISCLAIM ANY LIABILITY FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of special, incidental or consequential damages, so these limitations and exclusions may not apply to you. This warranty gives you specific legal rights. You may also have other rights which vary from state/province to state/province.

This is Kohler Co.'s exclusive written warranty.