

Features

- End drain.
- Slotted overflow for deep soaking.
- Bask[®] heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support.
- Coordinates with other products in the Archer[®] collection.
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm)

Material

Acrylic

Installation

• Drop-in

Required Accessories

- K- 7271 Brass Slotted Overflow Bath Drain
- or
 - K- 7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K- 24916 Wireless Music Kit



Archer[®]





Codes/Standards

CSA B45.5/IAPMO Z124 UL 1795 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

- O White
- 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice[™] Grey
- G9 Sandbar
- J 33 Mexican Sand™
- K4 Cashmere
 - 58 Thunder™ Grey
- 7 Black Black™








Archer® 5' Bath K-1946-W1

No change in measurements if connected

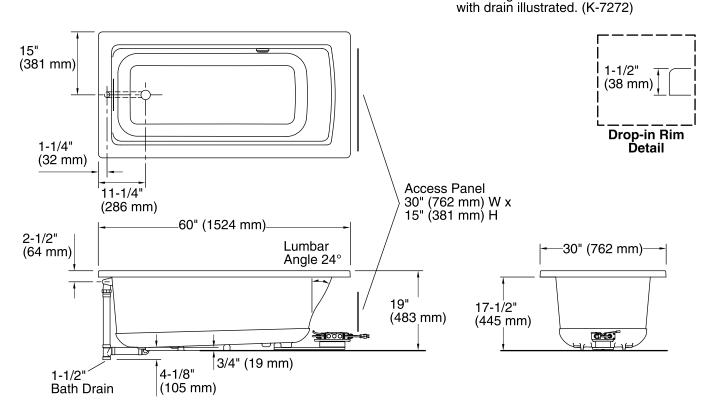

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD). Heated Surface: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	End
Basin area, bottom:	45-1/8" x 19-11/16" (1146 mm x 500 mm)
Basin area, top:	52-1/8" x 22-1/16" (1324 mm x 560 mm)
Weight:	68 lbs (30.8 kg)
Minimum floor load:	45.5 lbs/ft² (222.2 kg/m²)
Water depth:	15-1/8" (384 mm)
Water capacity:	57 gal (215.8 L)
Cutout:	Drop-in, 85-1/2" x 20-1/2" (2172 mm x 521 mm)
Electrical component rating:	Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

ADA compliant when installed to the specific requirements of these regulations.

