

PROFLEX_® 7236

Features


- Acrylic
- Drop-in or three-wall alcove
- Molded lumbar supports and armrests
- Optional K-1491 removable bath pillow
- Optional K-1283 separate apron
- Optional K-1601 footstop
- 72" (182.9 cm) x 36" (91.4 cm) x 20-1/8" (51.1 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC



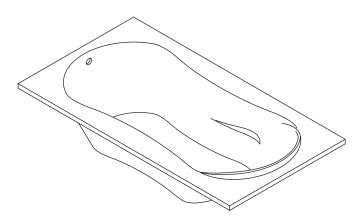

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant_® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1159	Bath, drop-in (shown)	□ 0	□ Other
K-1159-L	Bath, left drain, tile flange	□ 0	☐ Other
K-1159-R	Bath, right drain, tile flange	□ 0	☐ Other

Recommended Accessories				
K-7213	Cable drain with PVC tubing OR	□ CP	☐ Other	
K-7214	Cable drain without PVC tubing OR	□ CP	☐ Other	
K-11677	Trip lever drain	□ CP	□ PB	

Product Specification

The acrylic bath shall be 72" (182.9 cm) in length, 36" (91.4 cm) in width, and 20-1/8" (51.1 cm) in height. Bath shall be for drop-in or 3-wall alcove installation. Bath shall have molded lumbar supports and armrests. Bath shall have an optional K-1283 separate apron, an optional K-1491 removable pillow, and an K-1601 Footstop. Bath shall be Kohler Model K-1159-

USA: 1-800-4-KOHLER Canada: 1-800-964-5590 kohler.com

PROFLEX_® 7236

Optional Accessories				
K-1283	Separate apron with removable panel for front access	□ 0	☐ Other	
K-1491	Pillow	□ 0	☐ Other	
K-1601	Footstop	□ 0	☐ Other	

Technical Information


Fixture*:				
Basin area:				
Bathing well	55" (139.7 cm) x 21" (53.3 cm)			
Top area	65" (165.1 cm) x 26" (66 cm)			
To overflow:				
Water depth	15" (38.1 cm)			
Capacity	72 gal (272.5 L)			
Weight	52 lbs (23.6 kg)			
Drop-in cut-out	70-1/2" (179.1 cm) x 34-1/2" (87.6 cm)			
* Approximate measurements for comparison only.				

Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 38 lbs/square foot (184 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

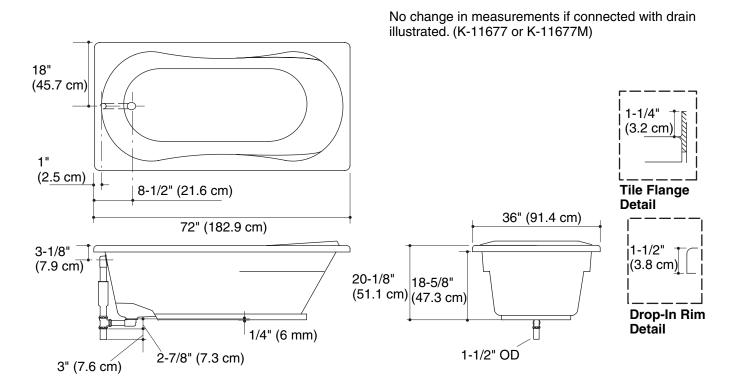

Product Diagram

