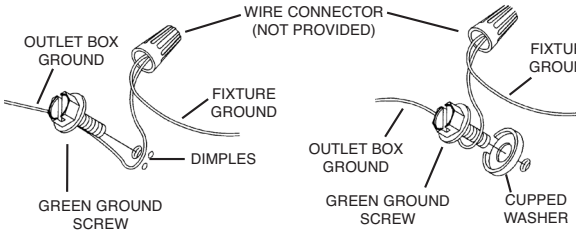



- CHAIN DROP INSTALLATION INSTRUCTIONS**
- Place bottom end of corner rod on top of corner of bottom ring. Align hole in end of corner rod with hole in bottom of ring.
 - Lower long threaded pipe down through hole in end of corner rod and through hole in bottom ring.
 - Thread finial onto end of threaded pipe protruding from bottom of ring. Tighten finial to secure rod in place. **NOTE:** Sides of rod should be square with sides of bottom ring.
 - Repeat steps 1 - 3 for remaining corner rods.
 - Place top ring on top of corner rods passing holes in corners of top ring over ends of threaded pipes protruding from tops of corner rods.
 - Lower arm down onto top ring. Pass hole in tab on end of arm over threaded pipe protruding from top of ring.
 - Thread finial onto end of threaded pipe protruding from top of ring.
 - Repeat steps 5-7 for remaining arms.
 - Pass wire from center stem on fixture body through hole in bottom of top trim piece and up through loop on top trim piece.
 - Screw top trim piece onto top of center stem.
 - Align hole in top of arm with hole on side of sphere on top trim.
 - Thread ball stud into hole in arm and into hole in side of sphere. Tighten ball stud to secure arm in place.
 - Repeat steps 11 and 12 for remaining arms.
 - After arms are attached to sphere, completely tighten finials on bottom of arms to secure arms in place.
 - Pass threaded pipe on end of small loop through hole in canopy.
 - Pass hole in lockwasher over end of threaded pipe protruding from inside canopy. Thread hexnut onto end of threaded pipe. Tighten hexnut to secure canopy to fixture.
 - TURN OFF POWER.**

- IMPORTANT:** Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
- Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “OFF” position.
 - Unscrew the fuse(s), or switch “OFF” the circuit breaker switch(s), that control the power to the fixture or room that you are working on.
 - Place the wall switch in the “OFF” position. If the fixture to be replaced has a switch or pull chain, place those in the “OFF” position.
- Find the appropriate threaded holes on mounting strap. Assemble mounting screws into threaded holes.
 - Attach mounting strap to outlet box. (Screws not provided) Mounting strap can be adjusted to suit position of fixture.
 - Grounding instructions: (See Illus. A or B).
 - On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
 - On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) After following the above steps. Never connect ground wire to black or white power supply wires.



- A** **B**
- 
- 21) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



SEE OTHER SIDE FOR SPANISH TRANSLATIONS.
VEA EL OTRO LADO DE TRADUCCIONES AL ESPAÑOL.

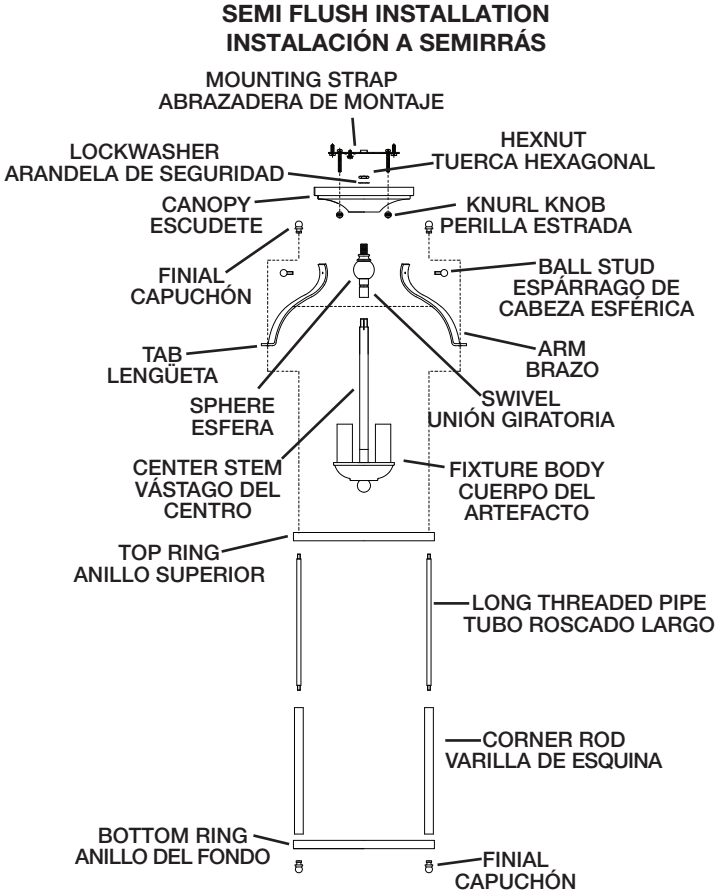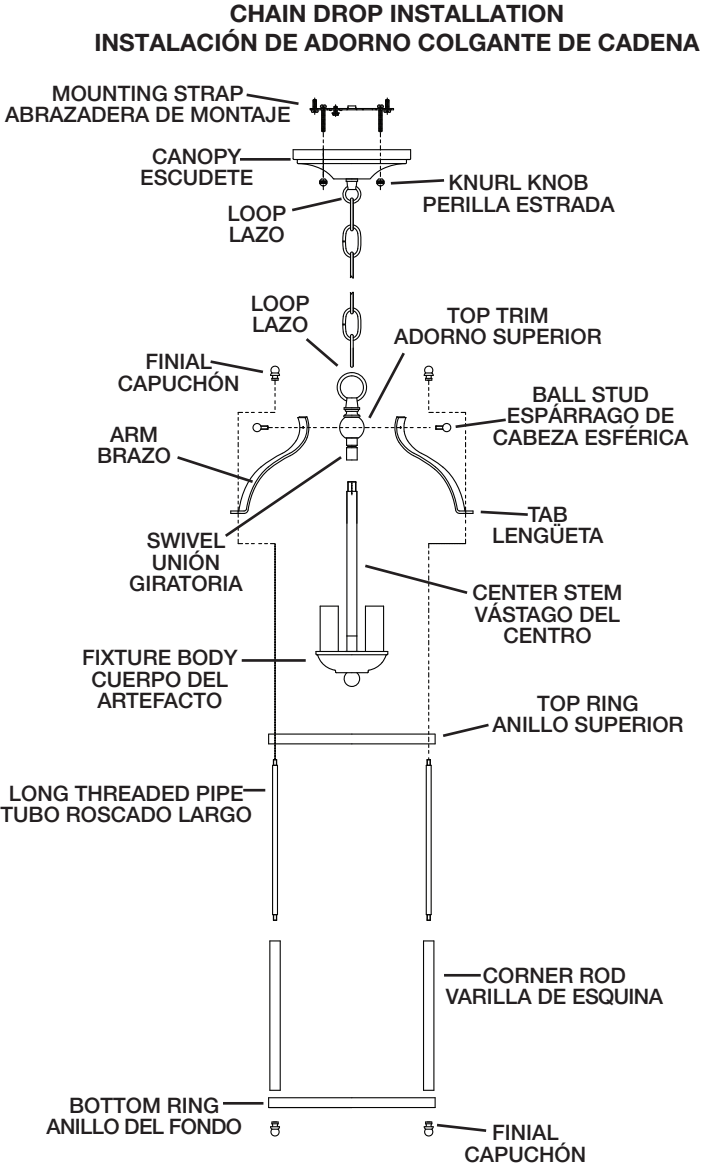

- Push fixture to ceiling, carefully passing mounting screws through holes in canopy.
- Thread knurl knobs onto mounting screws. Tighten knurl knobs to secure fixture to ceiling.

- SEMI FLUSH INSTALLATION INSTRUCTIONS**
- Remove loop from top trim piece.
 - Follow step #1-10 in Chain Drop Installation Instructions.
 - Pass hole in canopy down over end of threaded pipe on top trim. Set canopy on top of top trim piece.
 - Pass hole in lockwasher over end of threaded pipe protruding from inside canopy. Thread hexnut onto end of threaded pipe. Tighten hexnut to secure canopy to fixture.
 - Follow step #17-23 in Chain Drop Installation Instructions.