

Part No: 4235-020

FlameGuard®

Brass Transition Fittings

Desc: 2 CPVC FS FEM ADAPTER SOCXBR/FPT

MSRP: 97.64

Part Code: 076

Weight(lbs): 1.01


Weight(kg): 0.458

Weight(gm): 458

Size: 2

Color: ORANGE

Material: CPVC

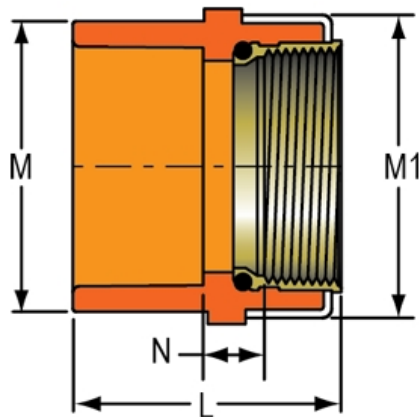

L = 2-25/32

M = 2-27/32

M1 = 3- 3/16

N = 3/8

Connection Socket x Brass Fipt

Type Standard

NOTE Not intended To Convey Or Dispense Water For Human Consumption Through Drinking Or Cooking

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

