

## PRODUCT SPECIFICATION DRAWING PEXRITE® #732



PEXRITE #732 "Exploded"

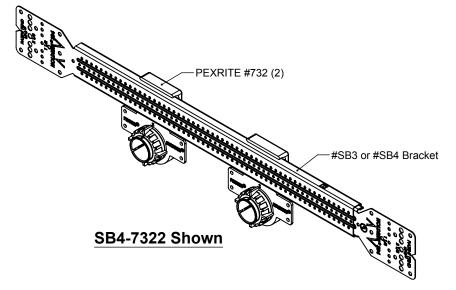

| Model    | Description       |  |
|----------|-------------------|--|
| 732      | 732 Assy ONLY     |  |
| SB3-7321 | 732 (1) & SB3 (1) |  |
| SB3-7322 | 732 (2) & SB3 (1) |  |
| SB4-7321 | 732 (1) & SB4 (1) |  |
| SB4-7322 | 732 (2) & SB4 (1) |  |

The PEXRITE® #732 supports 3/4" PEX Tubing, CPVC, Copper & Copper Bullet. The PEXRITE® #732 is for use with #SB3 & #SB4 brackets only.

## **Product Information:**

- Material: PVC, White & Purple, UL94V-0
- Temperature range: -10°F to +180°F
- Load rating: 25 pounds
- UPC / IAPMO pending



| Product Submitta   | l    |
|--------------------|------|
| Job Name:          |      |
| Date:              |      |
| Part Number:       | Qty: |
|                    |      |
|                    |      |
| Architect / Owner: |      |
|                    |      |
| Contractor:        |      |
|                    |      |
| Notes:             |      |
|                    |      |
|                    |      |

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

HOLDRITE

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONSSM