


INSTALLATION INSTRUCTIONS:

PERIMETER GASKETING:

Please note: This package contains 1 short (header) piece and 2 long (jamb) pieces of weatherstrip. For ease of installation, install header piece first, then 2 jamb pieces.


- 1. Can be installed on a wood or metal frame.
- 2. Measure, mark and trim header piece to length. Close door and position header piece on header stop so that seal makes light even contact with door. Mark header stop in center of slotted holes.
- 3. Drill pilot holes in header stop at marks.
- 4. Secure header piece to header stop with supplied screws.
- 5. To install the 2 jamb pieces, repeat steps 2, 3, and 4. Jamb pieces should contact threshold (or floor) at bottom & contact header piece at top.
- 6. Open and close door several times to check jamb weatherstrip fit and seal, and to make sure latch bolt engages strike plate.
- 7. To adjust, loosen screws, re-position weatherstrip, and tighten screws.

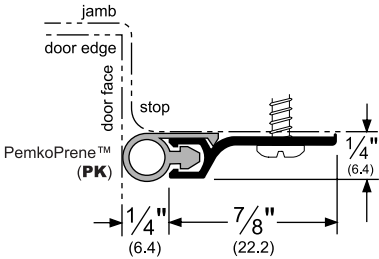


Actual Size

ASTRAGALS/MEETING STILES:


- 1. Trim lengths equal to door height.
- 2. Position at meeting stile edge of doors. Install screws in center of slots.
- 3. Adjust as required for proper seal, with ease of opening and closing, then tighten screws.

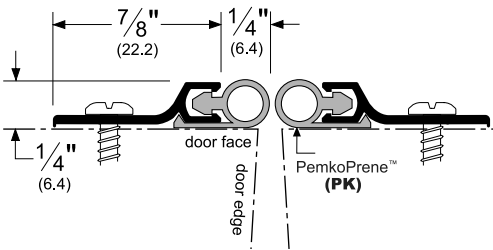

RIGID JAMB WEATHERSTRIP
Perimeter Gasketing/Spilt Astragals



- Seals against air, dust, water, and sound.
- Screws included.
- Slotted holes for adjustment.



(not to scale - larger view inside)

Product / Finish

303_PK

Testing/Ratings



CATEGORY I

Tools Required



www.pemko.com



ASSA ABLOY, the global leader
in door opening solutions

UNITED STATES:

MEMPHIS, TN
Ph: 800.824.3018
Fax: 800.243.3656

VENTURA, CA
Ph: 800.283.9988
Fax: 800.283.4050

CANADA:

VANCOUVER, BC
Ph: 877.535.7888
Fax: 877.535.7444

TORONTO, ON
Ph: 866.243.9816
Fax: 866.243.9817