


TECH-SPEC:

Product Reference Sheet

2005_T_

Example: **2005 | A | T | 36**
 Profile# Finish ThermoSeal Length

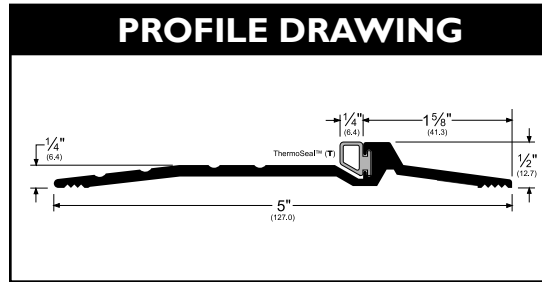

CATEGORY: Commercial Thresholds

TYPE: Latching Panic Exit Threshold

FINISHES: A (Mill Finish), D (Dark Anodized), G (Gold Anodized)

LENGTHS: Up to 185"

WIDTH: 5" (127.0 mm)

HEIGHT: 1/2" (12.7 mm)

WEIGHT: Estimated per foot: 0.56 lbs

RATINGS:     

PRODUCT APPROVALS:

- ASTM E90 and BS EN ISO 140-3:1995 for Sound Control.
- ADAAG-1998 (Amended); ICC/ANSI A117.1 and California Building Code, Title 24 for Barrier-Free Entry.
- Category J gaskets for use with listed steel frames and/or classified steel covered composite, hollow metal doors rated up to and including 3 hours; wood and plastic covered composite doors rated up to and including 1-1/2 hours; and wood core doors rated for 20 minutes.

ANSI NUMBER: J16123

LEAD TIME: 4 working days (or less)

AVAILABLE: 2005_T_ is shipped from PEMKO's Memphis, Ventura, Vancouver and Toronto locations

CROSS REFERENCE: NGP: 896, Zero: 65

INSTRUCTIONS: Available upon request (and on website)

CAD DRAWINGS: Available upon request (and on website)

PROFILE DRAWINGS: Available upon request (and on website)

CUT SHEET: Available upon request (and on website)

www.pemko.com

Memphis, TN USA
 P.O. Box 18966
 Memphis, TN 3818
 P: 800.824.3018
 F: 800.243.3656

Ventura, CA USA
 P.O. Box 3780
 Ventura, CA 93006
 P: 800.283.9988
 F: 800.283.4050

Vancouver, BC Canada
 103-2480 Mt. Lehman Rd.
 Abbotsford, BC V2T 6W3
 P: 877.535.7888
 F: 877.535.7444

Toronto, ON Canada
 160 Four Valley Dr.
 Vaughan, ON L4K 4T9
 P: 877.535.7888
 F: 877.535.7444