Brass Craft_®

Stainless Steel Flexible Water Connectors

Dependable. Durable. Professional.



BrassCraft® Stainless Steel Flexible Water Connector The Professional Standard

Designed with superior craftsmanship, the BrassCraft Stainless Steel Flexible Water Connector gives you a connection you can rely on.

- Durable, flexible water connector requires no cutting or soldering during installation
- Reinforced PVC inner hose is braided with stainless steel
- Brass hex nuts are plated for corrosion resistance
- 8-sided pneumatic crimp ensures reliable nut-to-hose connection
- Rubber washer ensures a universal fit and long lasting water-tight connection
- Long wing nuts make hand tightening secure, quick and easy



Faucet Hook-Up					
				Carton Bulk	
Part No.	UPC	Description	Length	Qty.	Wt. Lbs.
S1-12A F	026613008806	3/8" Comp x 1/2" FIP	12	25	4.8
S1-16A F	026613008820	3/8" Comp x 1/2" FIP	16	25	5.7
S1-20A F	026613008844	3/8" Comp x 1/2" FIP	20	25	6.4
S1-30A F	026613158730	3/8" Comp x 1/2" FIP	30	25	9.3
S1-12KC F	026613158907	3/8" Comp x 3/8" OD Comp	12	25	4.7
S1-20KC F	026613158914	3/8" Comp x 3/8" OD Comp	20	25	6.4
S8-12A F	026613008868	1/2" FIP x 1/2" FIP	12	25	5.4
S8-16A F	026613008882	1/2" FIP x 1/2" FIP	16	25	6.2
S8-20A F	026613008905	1/2" FIP x 1/2" FIP	20	25	7.0
S8-30A F	026613158921	1/2" FIP x 1/2" FIP	30	25	9.8



Tollet Hook-Up					
				Carton Bulk	
Part No.	UPC	Description	Length	Qty.	Wt. Lbs.
S1-9DL F	026613158976	3/8" Comp x 7/8" Ballcock	9	25	3.8
S1-12DL F	026613009049	3/8" Comp x 7/8" Ballcock	12	25	4.3
S1-12DLM F	026613157023	3/8" Comp x 7/8" Ballcock w/Metal Nut	12	25	5.8
S1-16DL F	026613095370	3/8" Comp x 7/8" Ballcock	16	25	5.2
S1-20DL F	026613009063	3/8" Comp x 7/8" Ballcock	20	25	5.9
S8-12DL F	026613008981	1/2" FIP" x 7/8" Ballcock	12	25	4.9
S8-16DL F	026613095363	1/2" FIP" x 7/8" Ballcock	16	25	5.7
S8-20DL F	026613158938	1/2" FIP" x 7/8" Ballcock	20	25	6.6

The BrassCraft Manufacturing Commitment to Compliance.

As an industry leader, we are continuously developing solutions for the ever-changing marketplace. In 2009, we were one of the first manufacturers to introduce no-lead* products with California's low-lead legislation. As this legislation expands to a nationwide implementation in January 2014, we continue our commitment to provide a full range of high quality compliant products, including our Stainless Steel Flexible Water Connectors.





Dishwasher Hook-Up





Washing Machine Hook-Up

				Car	ton Bulk
Part No.	UPC	Description	Length	Qty.	Wt. Lbs.
SL12-48WA F	026613158891	3/4" Female Hose Thread x 3/4" Female Hose Thread	48	25	18.7
SL12-60WA F	026613158884	3/4" Female Hose Thread x 3/4" Female Hose Thread	60	25	22.1
SL12-72WA F	026613158723	3/4" Female Hose Thread x 3/4" Female Hose Thread	72	25	25.4



Ice Make	/Humidifier	Hook-Up
----------	-------------	---------

		<u> </u>		Car	rton Bulk
Part No.	UPC	Description	Length	Qty.	Wt. Lbs.
S0-12IM F	026613158761	1/4" Comp x 1/4" Comp	12	25	6.6
S0-60IM F	026613158778	1/4" Comp x 1/4" Comp	60	25	16.1
S0-72IM F	026613158747	1/4" Comp x 1/4" Comp	72	25	18.6
S0-84IM F	026613158785	1/4" Comp x 1/4" Comp	84	25	21.0
S0-96IM F	026613158792	1/4" Comp x 1/4" Comp	96	25	23.3
S0-120IM F	026613158754	1/4" Comp x 1/4" Comp	120	25	28.1



^{*}BrassCraft Manufacturing is in compliance with the National Reduction of Lead in Drinking Water Act which becomes effective nationwide on January 4, 2014. This legislation changes the legal definition of "lead free" from 8% lead to a weighted average lead content of 0.25% with respect to wetted surfaces.

Distributed by:

Committed to Quality, Driven by Innovation.

Product availability is subject to change. Please contact BrassCraft Customer Service at 877-272-7755 for verification.













BrassCraft Manufacturing Co. 39600 Orchard Hill Place Novi, Michigan 48375-5331 TOLL-FREE: (877) 272-7755 FAX: (248) 305-6011

350 South Edgeware Road St. Thomas, Ontario Canada N4P 4C4 TOLL-FREE: (800) 265-4322 FAX: (800) 567-9100

For Residential and Commercial Applications				
Job Name	Engineer / Architect			
Job Location	Wholesaler			
Submittal Date	Contractor			

SL12-**WA Stainless Steel Flexible Braided Washing Machine Water Connector

Use: For use in potable water distribution systems in accessible locations only

Design Features:

- Tough inner core is reinforced to resist chlorine and chloramine leaching and deterioration
- Plated brass nuts for durability
- Rubber washer ensures a universal fit and long lasting water-tight connection
- 8-sided pneumatic crimp ensures realible nut-to-hose connection
- No Lead




Temperature: 40°- 140° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.430" ID (0.695" OD)

MATERIAL SPECIFICATIONS			
Inner Hose	Reinforced PVC		
Braiding	Stainless steel wire		
Barb	Brass		
Ferrule	Steel, zinc plated		
Nut	Brass, chrome plated		
Washer	Rubber		





Part Listing:


Ш	SL12-48WA F	3/4" female hose thread x 3/4" female hose thread x 48" length
	SL12-60WA F	3/4" female hose thread x 3/4" female hose thread x 60" length
	SL12-60WA P	3/4" female hose thread x 3/4" female hose thread x 60" length, bagged
	SL12-60WA PL	3/4" female hose thread x 3/4" female hose thread x 60" length, bagged
	SL12-72WA F	3/4" female hose thread x 3/4" female hose thread x 72" length
	SL12-72WA D2	3/4" female hose thread x 3/4" female hose thread x 72" length, carded, 2 pack
	SI 12-72WA DI 2	3//" female hose thread v 3//" female hose thread v 72" length carded 2 nack

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.



Stainless Steel Flexible Braided Washing Machine Water Connector

PART DIMENSIONS (Inches)				
Model	DIM. A	DIA. B		
SL12-48WA	48.0 / 49.0	1.20		
SL12-60WA	60.0 / 61.0	1.20		
SL12-72WA	72.0 / 73.0	1.20		

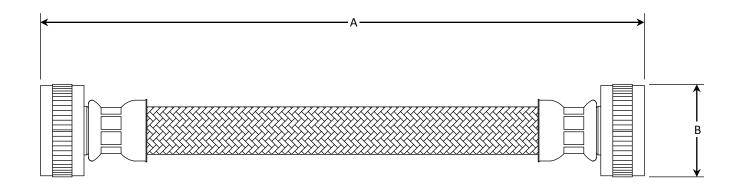

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- No-lead product CSA listed to NSF 372 (Class 6853-01)









