


## For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## SL12-\*\*WA Stainless Steel Flexible Braided Washing Machine Water Connector

**Use:** For use in potable water distribution systems in accessible locations only

**Design Features:**


- **Tough inner core** is reinforced to resist chlorine and chloramine leaching and deterioration
- **Plated brass nuts** for durability
- **Rubber washer** ensures a universal fit and long lasting water-tight connection
- **8-sided pneumatic crimp** ensures reliable nut-to-hose connection
-  **No Lead**

**Operating Specifications:**

**Temperature:** 40° - 140° F, intermittent to 180° F

**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.430" ID (0.695" OD)

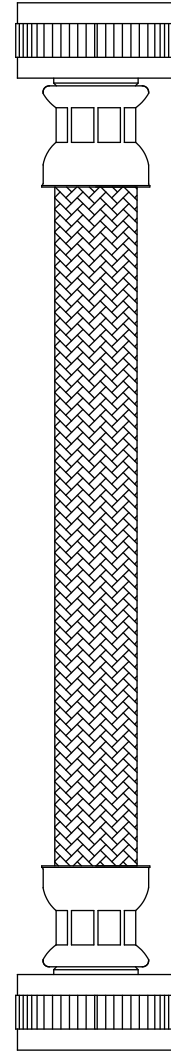

### MATERIAL SPECIFICATIONS

<b>Inner Hose</b>	Reinforced PVC
<b>Braiding</b>	Stainless steel wire
<b>Barb</b>	Brass
<b>Ferrule</b>	Steel, zinc plated
<b>Nut</b>	Brass, chrome plated
<b>Washer</b>	Rubber

**Part Listing:**


<input type="checkbox"/>	SL12-48WA F	3/4" female hose thread x 3/4" female hose thread x 48" length
<input type="checkbox"/>	SL12-60WA F	3/4" female hose thread x 3/4" female hose thread x 60" length
<input type="checkbox"/>	SL12-60WA P	3/4" female hose thread x 3/4" female hose thread x 60" length, bagged
<input type="checkbox"/>	SL12-60WA PL	3/4" female hose thread x 3/4" female hose thread x 60" length, bagged
<input type="checkbox"/>	SL12-72WA F	3/4" female hose thread x 3/4" female hose thread x 72" length
<input type="checkbox"/>	SL12-72WA D2	3/4" female hose thread x 3/4" female hose thread x 72" length, carded, 2 pack
<input type="checkbox"/>	SL12-72WA DL2	3/4" female hose thread x 3/4" female hose thread x 72" length, carded, 2 pack

*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.*

**BrassCraft®**

# SL12-\*\*WA Stainless Steel Flexible Braided Washing Machine Water Connector

PART DIMENSIONS (Inches)		
Model	DIM. A	DIA. B
SL12-48WA	48.0 / 49.0	1.20
SL12-60WA	60.0 / 61.0	1.20
SL12-72WA	72.0 / 73.0	1.20

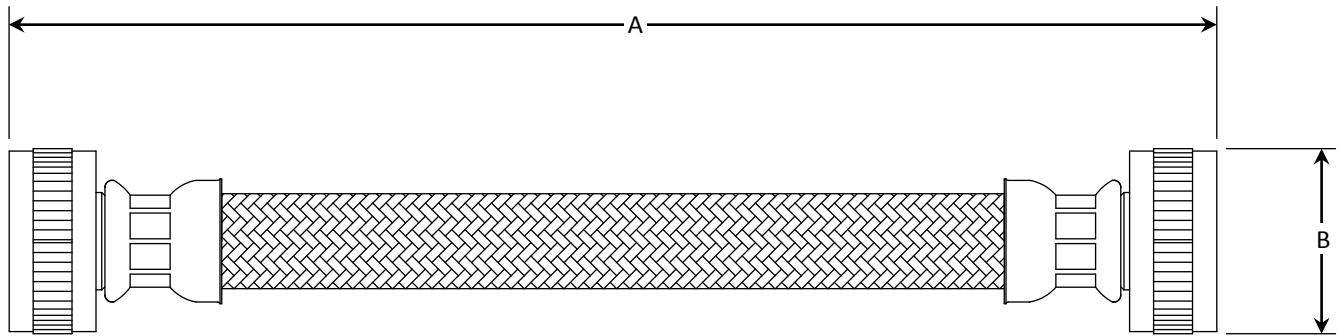

## Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- No-lead product CSA listed to NSF 372 (Class 6853-01)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

**BrassCraft®**