

## LVRD2 Verge® Lavatory System – LVRD-Series

- ADA and TAS Compliant
- Serves One or Two Users at a Time
- Standard Lavatory Spacing on 30" Centers
- Elongated Basin is Constructed of Evero™ Natural Quartz Surface
- Select a Bradley Faucet or Faucet by Others
- Available in 20 Evero Natural Quartz Surface Colors

### **Specifications**

Accommodates one or two users. The units handle washroom traffic quickly and economically, while providing each user with personal space. The Verge® Lavatory System is designed with standard lavatory spacing positioned on 30" centers.

## Construction

#### Bnw

Evero Geo Series is a natural quartz surface made from a blend of bio-based resin, natural quartz, granite and other exotic minerals. It is made of 25% recycled content.

Evero Pearl Series is a natural quartz surface made with bio-based resin, sea shells, recycled glass and natural quartz. It is made of 70% recycled content.



Variations in the natural stone color, pattern, size, shape and shade are inherent. Due to these unique characteristics, please expect subtle shade variations when units are installed adjacent to each other.

#### Pedestal

Panel is composed of decorative 300 series stainless steel.

#### **Support Frame**

Bowl assembly and pedestal panel are secured to a heavy gauge stainless steel support frame mounted to wall.

#### Vandal Resistance

Water supplies, valves, waste assembly and other optional items are concealed within the pedestal/frame.

## **Code Compliance and Certifications**

## **ANSI Standards**

Evero Natural Quartz Surface meets the requirements of ANSI Z124.3.

#### cUPC Approval

Verge Lavatory System is Uniform Plumbing Code (UPC), International Plumbing Code (IPC) and National Plumbing Code of Canada (NPC) approved through the International Association of Plumbing and Mechanical Officials (IAPMO). Manufactured in compliance with IGC 156, CSA B45 Series (R08) & ASME A112.18.1/CSA B125.1.



This plumbing fixture is designed for hand washing only. It is not Intended to dispense water for human consumption through drinking or for preparation of food or beverages.












Protected by one or more of the following U.S. Patents: D629,877 S; D640,778 S; and D649232 S.

Plumbing Fixtures Document No. 1072 Page 1 of 4
This information is subject to change without notice. 3/26/2013



<b>Models</b> (Must select one)					
Model	Description				
□ LVRD2	Verge Lavatory Syster	m – LVRD-Series, Tv	vo-Station		
Standard Selections (Must select one from each category) Faucet Drilling (select one)					
	4" Centerset Drilling D Infrared Faucet Battery	□ SHANK □ CAP-DCA	Centershank Drilling A Capacitive Faucet Battery		
Soap Dispenser (select one)    6324-68   32-oz. Plastic Globe, 4" Spout     6315-KT0000   Battery IR Metering Soap Dispenser Kit (with batteries and 1,000-shot soap)     6334   Lavatory-Mounted Soap Dispenser     SD0   Soap Drilling Only     NSD   No Soap Dispenser					
Water Supply (select one)					
□ TMA	Navigator® Thermostatic Mixing Assembly (Hot and Cold Supplies) w/Stops and Supply Hoses				
□ NONE	No Valve Option Selected				
Color of Evero™ Bowl (select one)					
Geo Series					
□ AMAZON □ ANTARCTICA □ BLACK-SEA □ CABO □ GLACIER		Mojave Nassau Nepal	□ SAHARA □ SERENGETI □ TUSCANY □ YUKON ch □ ZANZIBAR	Sahara Serengeti Tuscany Yukon Zanzibar	
Pearl Series (available at an additional charge) (Non-cancelable, non-returnable)					
□ ABALONE □ AKOYA	Abalone ☐ <b>BLACK-I</b> Akoya ☐ <b>SOUTH-</b>	WOON Black Moon SEA South Sea	☐ TAHITIAN	Tahitian	
Color of Access Panel (select one)  □ STAIN Stainless Steel					
P-Trap:					
□ S-PLASTIC Single Plastic Polypropylene P-Trap					
□ <b>S-CHROME</b> Single Chrome-Plated P-Trap					

For more information on Evero Natural Quartz Surface, faucets, valves, transformers, and the sensor-operated soap dispenser, please visit bradleycorp.com.

110-120 VAC plug-in adapter to convert battery IR faucet AC Adapter - 6315 soap dispenser (must order as a separate line item)

Optional Selections


□ PT □ P19-231F

© 2013 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone: 800.BRADLEY(800.272.3539) Fax: 262.251.5817
bradleycorp.com




# **Dimensions for LVRD2 Verge Lavatory Systems** 15/8" (41mm) -- 3/32" (2mm) (6mm) Drain inside dia. I 15/16" (8mm) I (2mm) - **1**¾16" (30mm) ı LVRD Drain and Strainer — Close-up View 60" (1524mm) 15" 15" (381mm) (381mm) 36" (914mm)



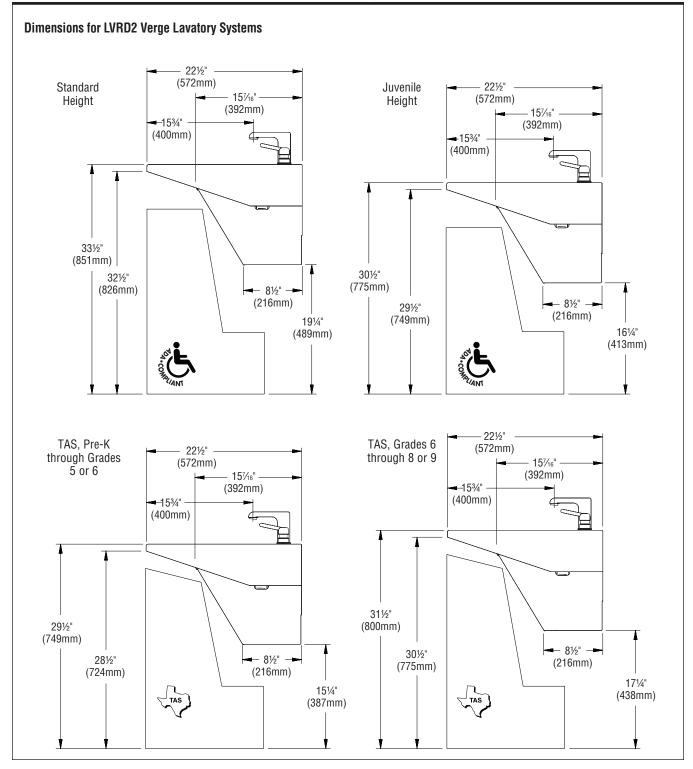



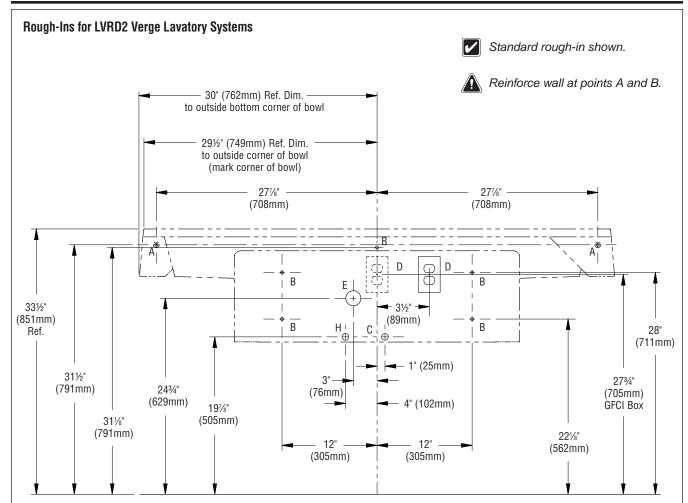

CODE	DESCRIPTION	QTY.
А	%" Lav Deck Bowl Anchors with a Minimum Pull-Out Force of 1,000 lbs. (reinforce walls at anchor points)	2
В	%" Lav Deck Frame Anchors with a Minimum Pull-Out Force of 1,000 lbs. (reinforce walls at anchor points)	5
H, C	1/2" NPT Hot/Cold Supplies, Stub-Out 2" From Wall	1
D	110v GFI Protected Electrical Outlet (AC version only)	
	Two single outlets are required for CAP-DCG or CAP-DCA faucets due to the size of the transformers.	2
E	1½" NPT Drain, Stub-Out 2" from Wall	1

RIM HEIGHT	VERTICAL HEIGHT ADJUSTMENTS FOR CODES A-E and H	FIXTURE STYLE	
33½"	None	Standard Height	
31½"	Subtract 2"	TAS, Grades 6 through 8 or 9	
291/2"	Subtract 4"	TAS, Pre-K through Grades 5 or 6	
30½"	Subtract 3"	Juvenile Height	