

PFX75DC & PFX75FC



Low Lead Brass MIP Boiler Drains

Product Features

- Low lead compliant brass casted
- cUPC and NSF 372 certified by IAPMO
- Rated pressure: 100 psi WWP (working water pressure), non-shock
- Operating pressure: 25 psi to 125 psi, non-shock
- Rated temperature: 40 to 160 °F (5 to 71 °C)
- No kink full pattern with stuffing box
- 1/2" & 3/4" MNPT inlets, 3/4" NHT outlet
- 1/2": MNPT & solder dual inlet connection
- Not for use at or below ground level




PFX75FC

Product Specifications

Product Code	Description	Inlet Connection	Outlet Connection	Width		Height	
				in	mm	in	mm
PFX75DC	1/2" LF Brass MIP Boiler Drain	1/2" MNPT & 1/2" solder	3/4" NHT	2-1/2	62	3-1/2 ~ 3-3/4	88 ~ 93
PFX75FC	3/4" LF Brass MIP Boiler Drain	3/4" MNPT	3/4" NHT	2-1/2	62	3-1/2 ~ 3-3/4	88 ~ 93

No.	Part	Material
1	Wheel Nut	Steel
2	Name Plate	Aluminum
3	Hand Wheel	Cast iron
4	Stem	LF Brass
5	Packing Nut	Brass
6	Gland Packing	NBR
7	Bonnet	LF Brass
8	Gasket	Vulcanized Fibre
9	Seat Packing	NBR
10	Seat Screw	LF Brass
11	Body	LF Brass

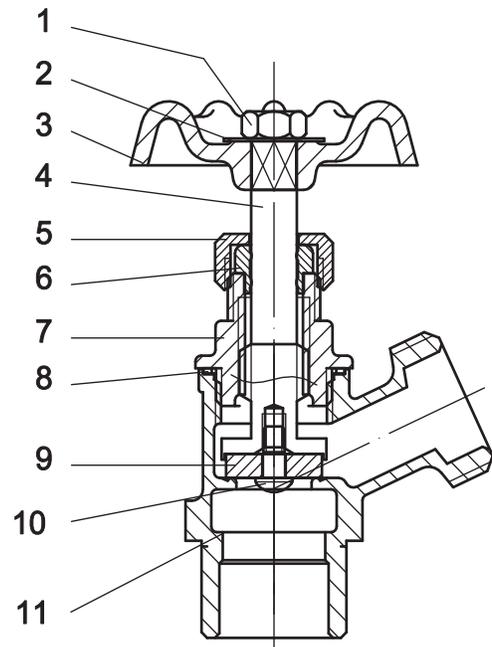

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

