

Specifications

PFXEM Series

Frost-Proof Yard Hydrant



Product Features

- Lever control with variable flow
- Heavy-duty solid no-lead brass hose adapter
- Pipe and rod are galvanized to prevent rust
- Head and lever can be padlocked to prevent unauthorized use
- Metal gland and packing nut included
- Drains below the frost line once hydrant is shut off
- Inlet: 3/4" NPT in no-lead brass casting
- Outlet: 3/4" no-lead brass hose thread
- Graphite packing
- Steel and molded rubber plunger made of self-lubricating material
- 1" Galvanized pipe
- Low-lead compliant
- Meets the Federal USA drinking water requirements but has not been specifically tested or approved as no-lead in the state of California.


Available Parts

- PFXEMHDL** Lever control (A)
PFEM7500RK Repair kit includes: draw straps (pair), pivot connector and nuts, packing nut, valve stem packing and plunger

Parts

SKU	Freezeless Yard Hydrant Description	Overall Length (inches)
PFXEM7501	1 FT BURY	39.5
PFXEM75015	1-1/2FT BURY	45.5
PFXEM7502	2 FT BURY	51.5
PFXEM7503	3 FT BURY	63.5
PFXEM7504	4 FT BURY	75.5
PFXEM7505	5 FT BURY	87.5
PFXEM7506	6 FT BURY	99.5
*PFXEM7508	8 FT BURY	123.5
*PFXEM7510	10 FT BURY	147.5

*For Canada only

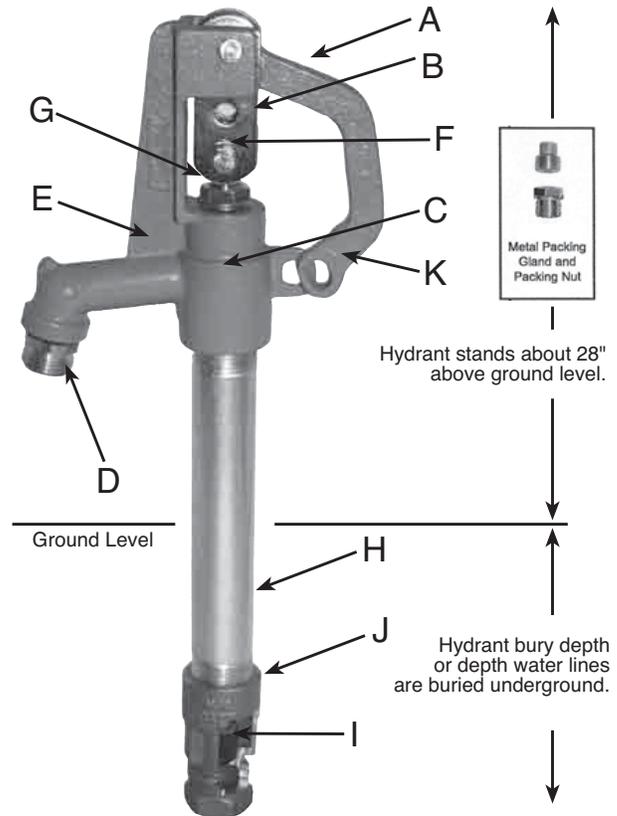

- A** Lever control
- B** Draw straps
- C** Operating rod
- D** Heavy-duty solid brass hose adapter
- E** Heavy cast iron head
- F** Pivot connector with SS bolt
- G** Packing gland
- H** Galvanized pipe
- I** Long-life one-piece plunger
- J** Double bypass valve body
- K** Locking eye

WATER SYSTEM PRESSURE	GALLONS PER MINUTE (GPM)									
	0	5	10	15	20	25	30	35	40	45
20 PSI	18 GPM @ 20 PSI									
30 PSI	21 GPM @ 30 PSI									
40 PSI	24 GPM @ 40 PSI									
60 PSI	30 GPM @ 60 PSI									
80 PSI	34 GPM @ 80 PSI									
100 PSI	40 GPM @ 100 PSI									
NOTE: Most common 1/2 hp submersible pumps output is 10 GPM.										

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

