
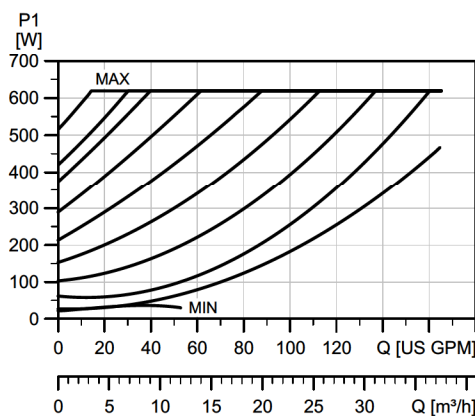
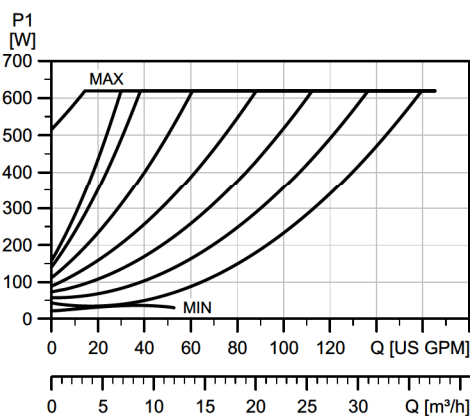
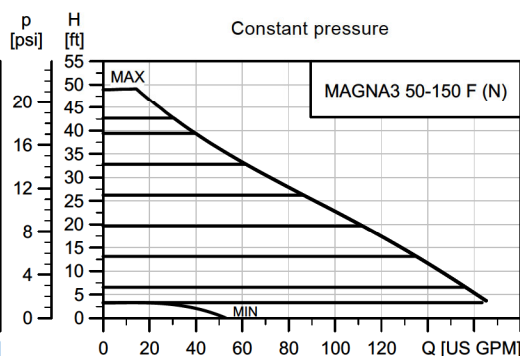


## MAGNA3 50-150 F (N)

1 x 115 &amp; 208-230 V, 50/60 Hz

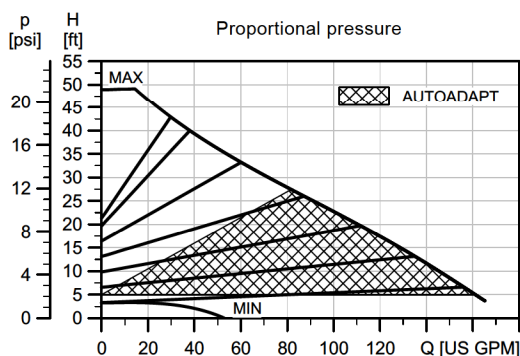


| Speed | $I_{1/1}$ [A] 115 V | P1 [W] 115 V | $I_{1/1}$ [A] 230 V | P1 [W] 230 V |
|-------|---------------------|--------------|---------------------|--------------|
| Min.  | 0.31                | 18.5         | 0.23                | 18.5         |
| Max.  | 5.54                | 630          | 2.78                | 630          |

The pump incorporates overload protection.

| Net weights [lbs (kg)] | Gross weights [lbs (kg)] | Ship. vol. [ft³ (m³)] |
|------------------------|--------------------------|-----------------------|
| 40 (18.3)              | 49 (22.0)                | 1.77 (0.05)           |

System pressure: Max. 175 psi (12 bar)  
 Liquid temperature: 14 to 230 °F (-10 °C to +110 °C)  
 Also available with: Stainless-steel pump housing, type N  
 Specific EEI: 0.17

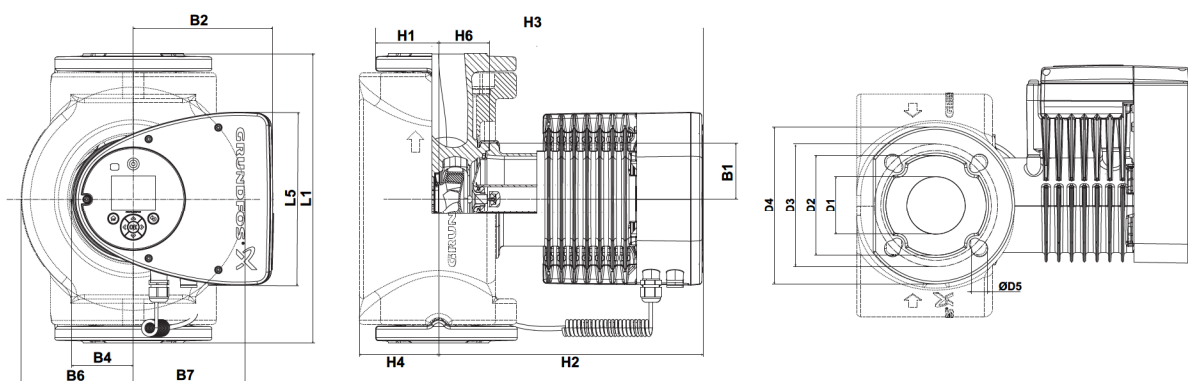

| Pump type           | Dimensions [in (mm)] |            |                   |            |             |            |           |           |
|---------------------|----------------------|------------|-------------------|------------|-------------|------------|-----------|-----------|
|                     | L1                   | L5         | B1                | B2         | B4          | B6         | B7        | D2        |
| MAGNA3 50-150 F (N) | 11.02 (280)          | 8.03 (204) | 3.31 (84)         | 6.46 (164) | 2.87 (73)   | 5 (127)    | 5 (127)   | 3.90 (99) |
|                     | D3                   | D4         | D5                | H1         | H2          | H3         | H4        | H6        |
|                     | 4.33/4.92 (110/125)  | 6.5 (165)  | 0.55/0.75 (14/19) | 2.83 (72)  | 12.05 (306) | 14.9 (378) | 3.82 (97) | 2.05 (52) |

For product numbers, see page 7.

TM05 8107 1214

TM05 7652 1413