# For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

#### R04/14/34X Multi-Turn Straight Stop – Sweat x Compression

Use: For use with potable water systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stops.

## **Design Features:**

- Machined one-piece brass body provides strength, durability, and long-lasting performance
- Oval knurled handle provides a secure grip and smooth on/off operation
- Easy-to-remove handle with screw attachment helps protect against accidental stop operation during rough-ins


### **Operating Specifications:**

40°-160° F Temperature:

Pressure: 125 PSI maximum





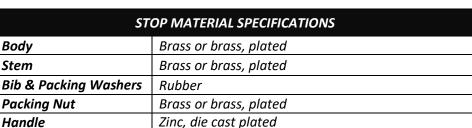


BID & Packing wasners	Rubber
Packing Nut	Brass or brass, plated
Handle	Zinc, die cast plated
Handle Screw	Steel, zinc plated
Compression Sleeve	Brass
Compression Nut	Brass or brass, plated

Part Listing:				
R04X C	1/2" nom sweat x 1/4" OD compression, chrome plated			
R04X R	1/2" nom sweat x 1/4" OD compression, rough brass			
R04X R1	1/2" nom sweat x 1/4" OD compression, rough brass, window tray			
R14X C	1/2" nom sweat x 3/8" OD compression, chrome			
R14X C1	1/2" nom sweat x 3/8" OD compression, chrome, window tray			
R14X CD	1/2" nom sweat x 3/8" OD compression, chrome, carded			
	R04X C R04X R R04X R1 R14X C R14X C1			

Ш	R14X R	1/2" nom sweat x 3/8" OD compression, rough brass
	R14X R1	1/2" nom sweat x 3/8" OD compression, rough brass, window tray

R34X C	1/2" nom sweat x 1/2" OD compression, chrome
R34X R	1/2" nom sweat x 1/2" OD compression, rough brass

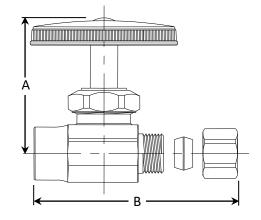

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	
R04X	1.56	1.95	
R14X	1.56	2.00	
R34X	1.56	2.06	

#### **Listings & Certifications:**

IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

