


1" Flat Drive



Product Data Sheet

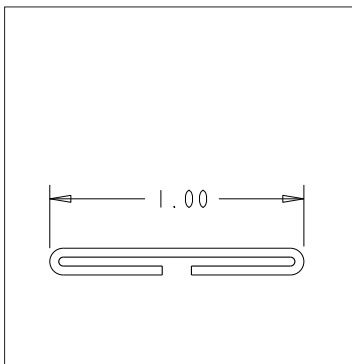

Description

Elgen's 1" Flat Drive is used in conjunction with either the Elgen Flat "S", the Elgen 1/2" Standing "S", the Elgen 1" Standing "S", or the Elgen 1 5/8" Standing "S".

The Elgen 1" Flat Drive is used for making a connection between two rectangular duct walls. The Elgen 1" Flat Drive is used in Low Pressure applications.

Standard Construction

Rollformed using 24 GA ASTM A-653 G60
Material
10' length

Features

Meets 2005 SMACNA Standards-(Refer to page 2.74, Table 2-31, Transverse Joint Reinforcement)
Provides external duct reinforcement
Union Made Yellow Label

Optional Construction

20,22,26 or 28 GA ASTM A-653 G60/G90
Material

Cut to Length With Ear

Stainless Steel 304
Stainless Steel 316
Aluminum
PCD
Galvanneal (Paint Grip)
Agion (Antimicrobial Coating)

Packaging

GA	Length (ft)	Skid Qty (ft)	Weight (lbs)
24	10	5000	2600

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com