

## Horizontal Vent Termination Kits

**Product** Horizontal vent kit for use in venting high efficiency fossil fuel appliances.

**Purpose** Vents horizontally to pull in fresh outside air and vent exhaust to outside of building.


- Features**
- Low profile
  - Much less visibility than traditional vents
  - Doesn't need to be painted
  - Stainless steel screws (corrosion resistant)
  - UV stabilized for outdoor use in direct sunlight

- General Specifications**
- Do not paint
  - Gas vent - BH, Class II - 65°C max (148°F)
  - Zero clearance to combustible construction is allowed
  - $\Delta$  Do not block intake and exhaust  $\Delta$
  - Intended for use with Category IV high efficiency (condensing gas) furnaces or water heaters, ULC S636 Class II



### General Characteristics

Part #	Weight (lbs)	Connection Size (inch)	Overall Width (inch)	Overall Height (inch)	Depth out from Wall (inch)
HVENT-2	1.8	2	11.875	7.875	1.000
HVENT-3	1.7	3	11.875	7.875	1.000

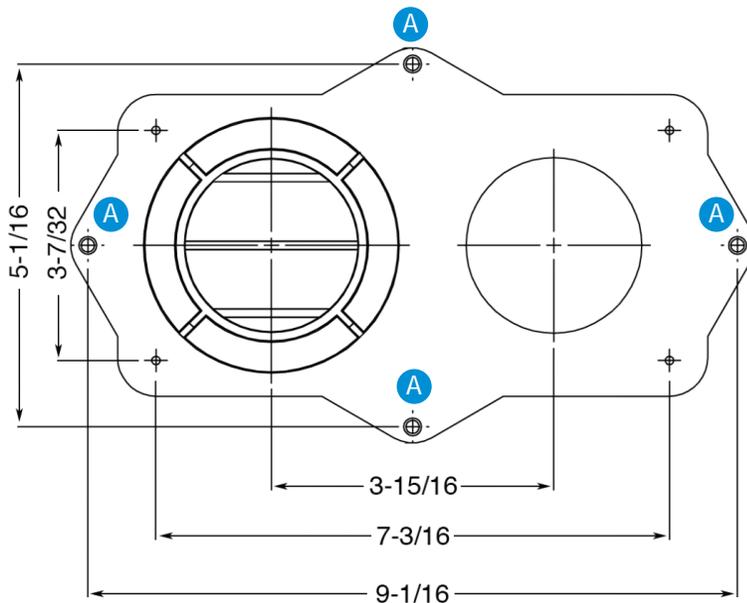

Dimensions in Inches

**A** Screw into wall

**B** Screw through cover

**Ex** Exhaust

**In** Intake

