

Profile™ Series 27" Warming Drawer

Optional Accessories: ZXD27B -1/4" panel kit capability.

Undercounter Installation: A solid barrier must be installed at least 1" from the lowest point of the bottom of cooktop burner box to the top of the cutout. Use any solid material such as 1/4"-thick plywood. Allow at least 1/4" air gap between the barrier and the top of the warming drawer. See label on top of the warming drawer for approved cooktop models.



Under Oven Installation: Additional clearance between cutouts may be required. Check to be sure that oven supports above the warming drawer location do not obstruct the required interior 23-1/2" depth and 9-1/4" height.

Door handle protrudes 2-3/4" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

KW Rating	
120V	.45
Breaker Size	
120V	15 Amps

Warming Drawer Dimensions

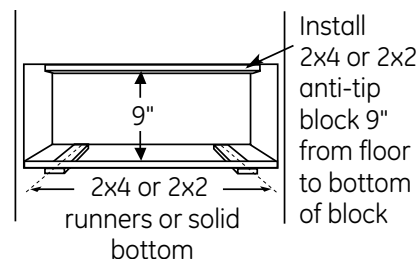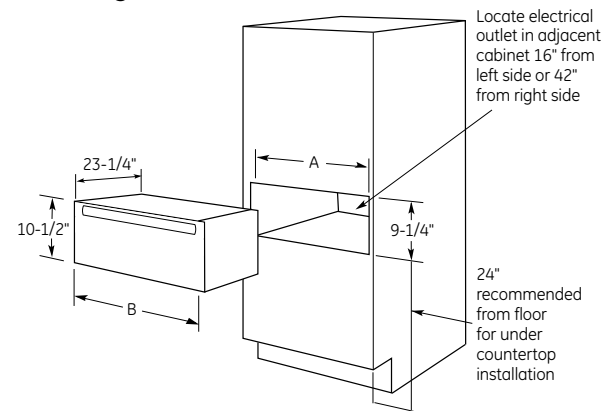

	A	B
27" Drawer	25-1/2"	26-3/4"

23-1/2" min.

Oven cutout

2" min.

Allow 5/8" overlap on all sides

2x2 or 2x4 anti-tip block against rear wall 9" from floor to bottom of block


9"

9-1/4"

A

1" min. above toe kick or adjust to oven installation height

Undercounter Installation

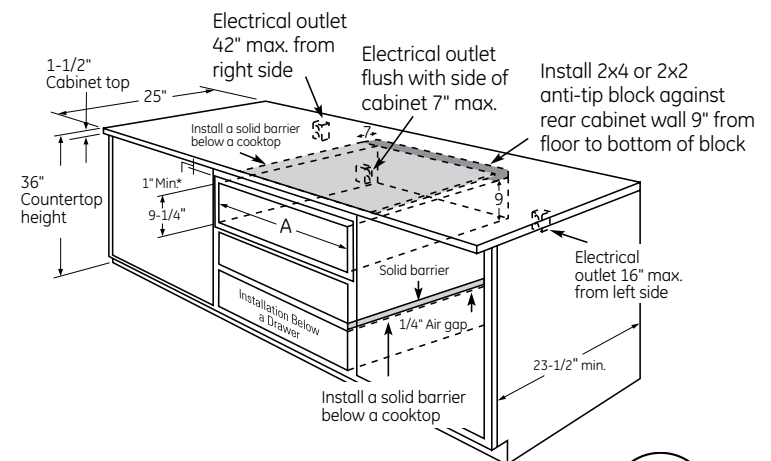

imagination at work

For answers to your Monogram® or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.

Listed by
Underwriters
Laboratories


Specification Created 8/14

PJ7000SF

Profile™ Series 27" Warming Drawer

Features and Benefits

- Variable temperature control - Provides a variety of temperatures
- Variable humidity control - Customized warming from crisp to moist
- Frameless drawer front - Offers a smooth appearance
- "On" indicator light - Illuminates when warming drawer is operating
- Half rack - Maximizes drawer space
- Model PJ7000SFSS - Stainless steel

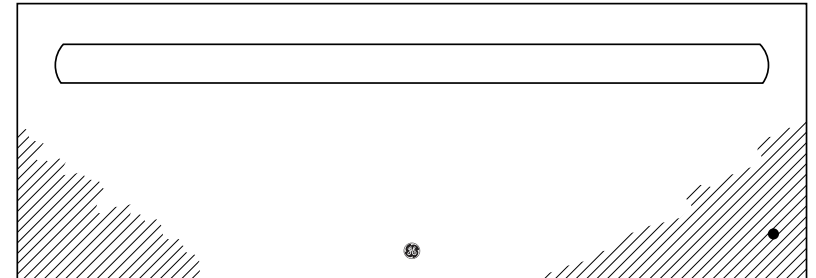

imagination at work