



Check Valves - NO LEAD Brass



CHECK VALVE Features:

- NO LEAD cast brass or stainless steel body & poppet.
- Buna-N o-ring.
- Stainless steel springs, washers, locknuts.
- Delrin poppet stem guide.
- 200 psi WOG working pressure.
- 300 lb. max hang weight (down pull) tension.
- For use in water well systems.
- Individually cartoned.
- **Third party certified to NSF/ANSI 372.**

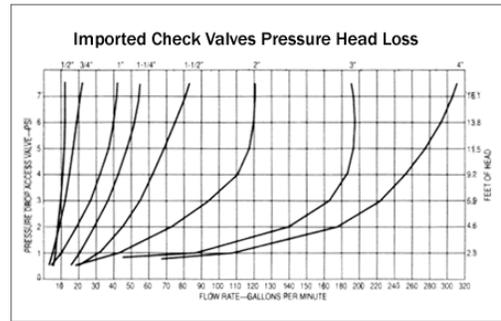

CVXLDNL Series

CVXLDNL Series NO LEAD BRASS Check Valves

- Rough body finish.
- Extra long at discharge end.
- For cold water applications only.

Part Number	Size	Ctn Qty
CVXLDNL100BS	1" x 1"	60
CVXLDNL125BS	1 1/4" x 1 1/4"	40



CVMNL-BS Series

CVMNL-BS Series NO LEAD BRASS Submersible Check Valves

- Rough body finish.
- FPT x MPT
- For cold water applications only.

Part Number	Size (FPT X MPT)	Ctn Qty
CVMNL100BS	1" x 1"	60
CVMNL125BS	1" x 1 1/4"	40
CVMNL1252BS	1 1/4" x 1 1/4"	60



CVMXLNL Series

CVMXLNL Series NO LEAD BRASS Submersible Check Valves

- Rough body finish.
- Extra long body.
- For cold water applications only.

Part Number	Size (M X F)	Ctn Qty
CVMXLNL100BS	1" x 1"	60
CVMXLNL125BS	1 1/4" x 1 1/4"	40

