


Lead-Free* PRO-Stop® Quarter-Turn Supply Stops

- 125 CWP Rated
- IAPMO Listed to cUPC and NSF/ANSI 61-9 (includes Annex F and G) and NSF/ANSI 372

NIBCO® PRO-Stop® Supply Stops are specifically designed for use in applications that deliver water for human consumption; this includes commercial as well as residential construction.


MATERIAL LIST

PART	SPECIFICATION
Body and Nut	C69300
Stem/Ball	C69300
Seat	PTFE
Retainer	C69300
O-Ring	EPDM
Handle	ABS Chrome-Plated
Ferrule	Brass
Screw	Stainless Steel

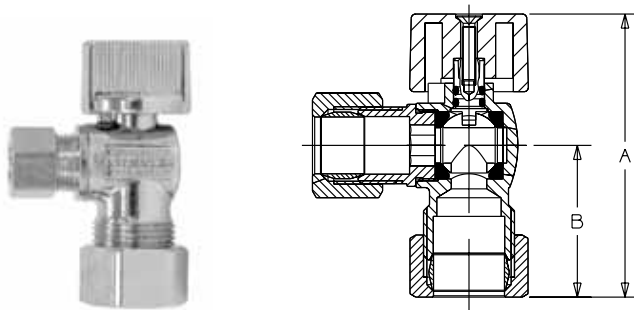


7145A-LF

DESCRIPTION	Inlet x Outlet	DIMENSIONS		APPROX. NET WT.
		A	B	
ANGLE PATTERN Compression x Compression	5/8 OD x 3/8 OD	2.50"	1.33"	.240 lb

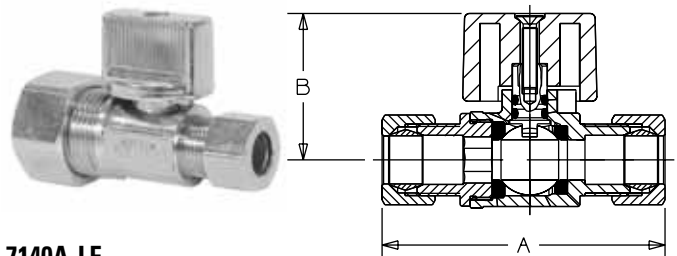


7140A-LF

DESCRIPTION	Inlet x Outlet	DIMENSIONS		APPROX. NET WT.
		A	B	
STRAIGHT PATTERN Compression x Compression	5/8 OD x 3/8 OD	2.34"	1.15"	.227 lb

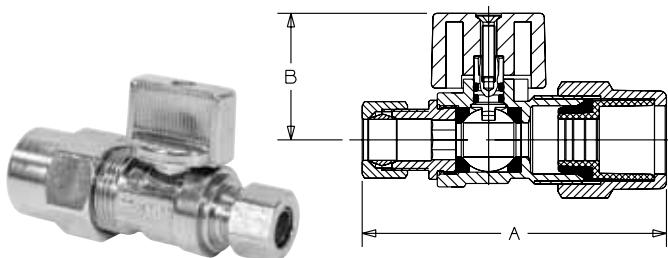

7170A-LF

DESCRIPTION	Inlet x Outlet	DIMENSIONS		APPROX. NET WT.
		A	B	
STRAIGHT PATTERN CPVC x Compression	1/2 x 3/8 OD	2.80"	1.17"	.229 lb

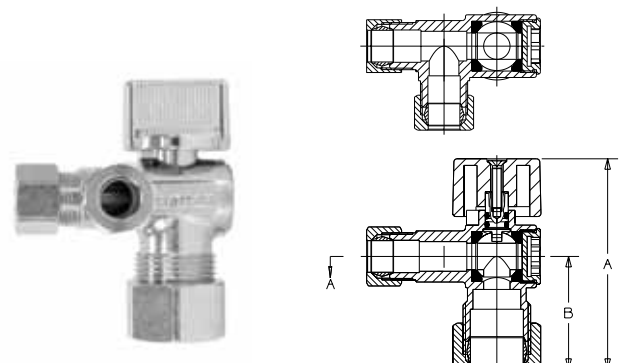

7145ADX-LF

DESCRIPTION	Inlet x Outlet	DIMENSIONS		APPROX. NET WT.
		A	B	
DUAL OUTLET ANGLE PATTERN Comp x Comp x Comp	5/8 OD x 3/8 OD x 3/8 OD	2.50"	1.33"	.353 lb

*Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤ 0.25% per the Safe Drinking Water Act (Sec. 1417) amended 1-4-2011 and other equivalent state regulations.


Lead-Free* PRO-Stop® Quarter-Turn Supply Stops

- 125 CWP Rated
- IAPMO Listed to cUPC and NSF/ANSI 61-9 (includes Annex F and G) and NSF/ANSI 372

NIBCO® PRO-Stop® Supply Stops are specifically designed for use in applications that deliver water for human consumption; this includes commercial as well as residential construction.


MATERIAL LIST

PART	SPECIFICATION
Body and Nut	C69300
Stem/Ball	C69300
Seat	PTFE
Retainer	C69300
O-Ring	EPDM
Handle	ABS Chrome-Plated
Ferrule	Brass
Screw	Stainless Steel

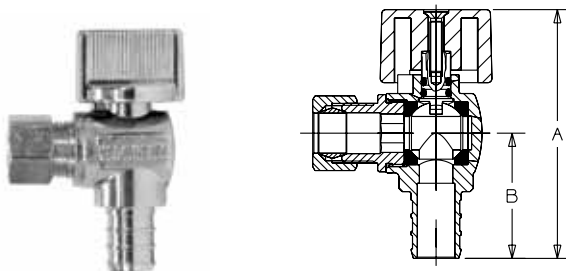


7165A-LF

DESCRIPTION	Inlet x Outlet	DIMENSIONS		APPROX. NET WT.
		A	B	
ANGLE PATTERN PEX x Compression	1/2 x 3/8 OD	2.34"	1.17"	.180 lb

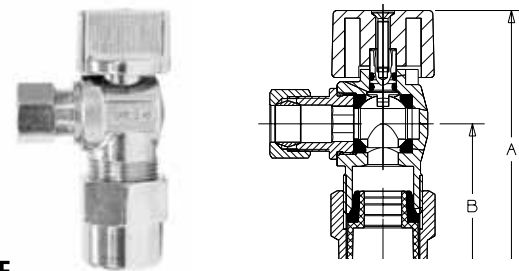


7175A-LF

DESCRIPTION	Inlet x Outlet	DIMENSIONS		APPROX. NET WT.
		A	B	
ANGLE PATTERN CPVC x Compression	1/2 x 3/8 OD	2.75"	1.60"	.242 lb

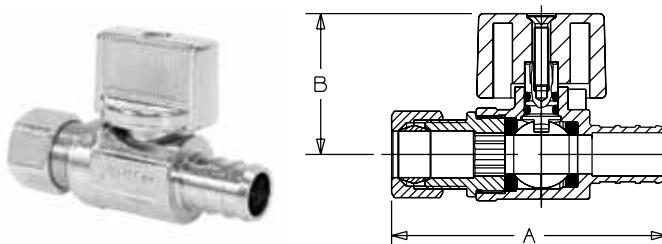

7160A-LF

DESCRIPTION	Inlet x Outlet	DIMENSIONS		APPROX. NET WT.
		A	B	
STRAIGHT PATTERN PEX x Compression	1/2 x 3/8 OD	2.24 "	1.15"	.183 lb

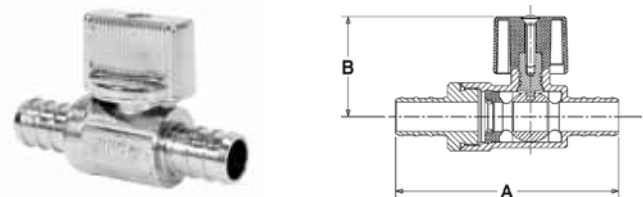

7160APEX-LF

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		A	B	
STRAIGHT PATTERN PEX x PEX	1/2	2.26 "	1.15"	.308 lb

*Lead Free refers to the wetted surface of pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤ 0.25% per the Safe Drinking Water Act (Sec. 1417) amended 1-4-2011 and other equivalent state regulations.