

SPECIFICATIONS

**FIGURE XPTT**

GAUGES, THERMOMETERS & ACCESSORIES




LEAD-FREE PRESSURE/TEMPERATURE TEST PLUG

FNW Figure XPTT lead-free brass pressure/temperature test plugs facilitate quick pressure and temperature readings at recommended test points without disturbing the process. Mainly used in plumbing, heating, ventilation and air conditioning installations.




**FEATURES**

- 1,000 PSI maximum operating pressure
- 1/4" or 1/2" MNPT end process connection
- Brass body
- NBR (Buna N) diaphragm/core
- Plastic cap retainer
- -40°F–302°F (-40°C–150°C) temperature rating
- ASME B1.20.1 compliant
- CRN registered

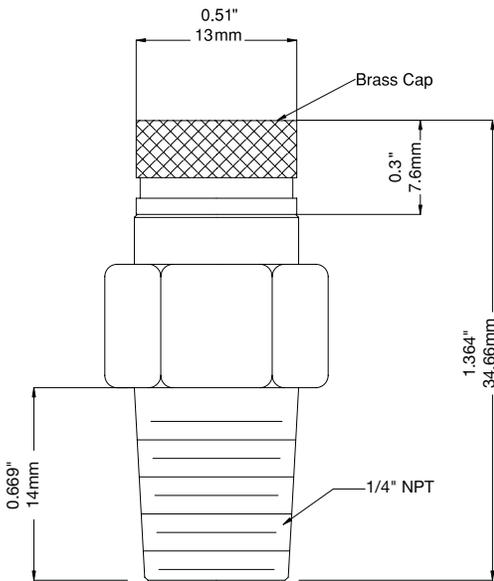

**0.25" Test Plug**

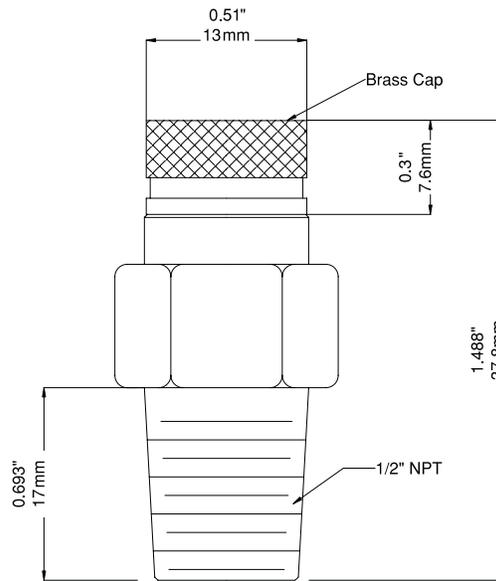

**0.5" Test Plug**

Catalog Number	Lead-Free	Connection Size		Maximum Operating Pressure	
		in.	mm	PSI	kPA
FNWXPTTB	Yes	1/4	6	1,000	6,895
FNWXPTTD	Yes	1/2	13	1,000	6,895