



# Steward® | K-5244-ET

Washout half-stall 0.125 gpf urinal, top spud

## Features

- Revolutionary funnel design virtually eliminates splashback
- KOHLER-engineered water flushing spreader successfully rinses the inverted back wall, sides, and front of the urinal basin for a more sanitary customer experience
- Ultra-low consumption. Operates at 0.125 gpf (0.47 lpf)
- 3/4" (19 mm) top spud
- Includes removable strainer, 2" outlet spud, universal mounting bracket, and hangers
- Offers 80% water savings compared to standard 1.0-gpf urinals
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System
- Washout urinal
- 0.125 gpf (0.47 lpf)
- 15-5/8" (397 mm) extended rim



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |   |             |
|---|-------------|
| 0 | White       |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-22-2026 11:2 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*ADA compliant when installed to the specific requirements of these regulations.*

*This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.*



ADA

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1

## Technical Information

*All product dimensions are nominal.*

|               |                     |
|---------------|---------------------|
| Spud size:    | Inlet, Top          |
| Trapway Type: | Concealed           |
| Flush Rate:   | 0.125 gpf (0.5 lpf) |

Designed for the above water use when installed with a water-saving flushometer.

## Material

- Vitreous china
- Vitreous china

## Recommended Products/Accessories

K-23726 Drain treatment  
K-4929 Waterless urinal maintenance balls  
K-76317 Urinal flushometer, 0.125 gpf


## Warranty

*See website for detailed warranty information.*

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-22-2026 11:2 - US-CA

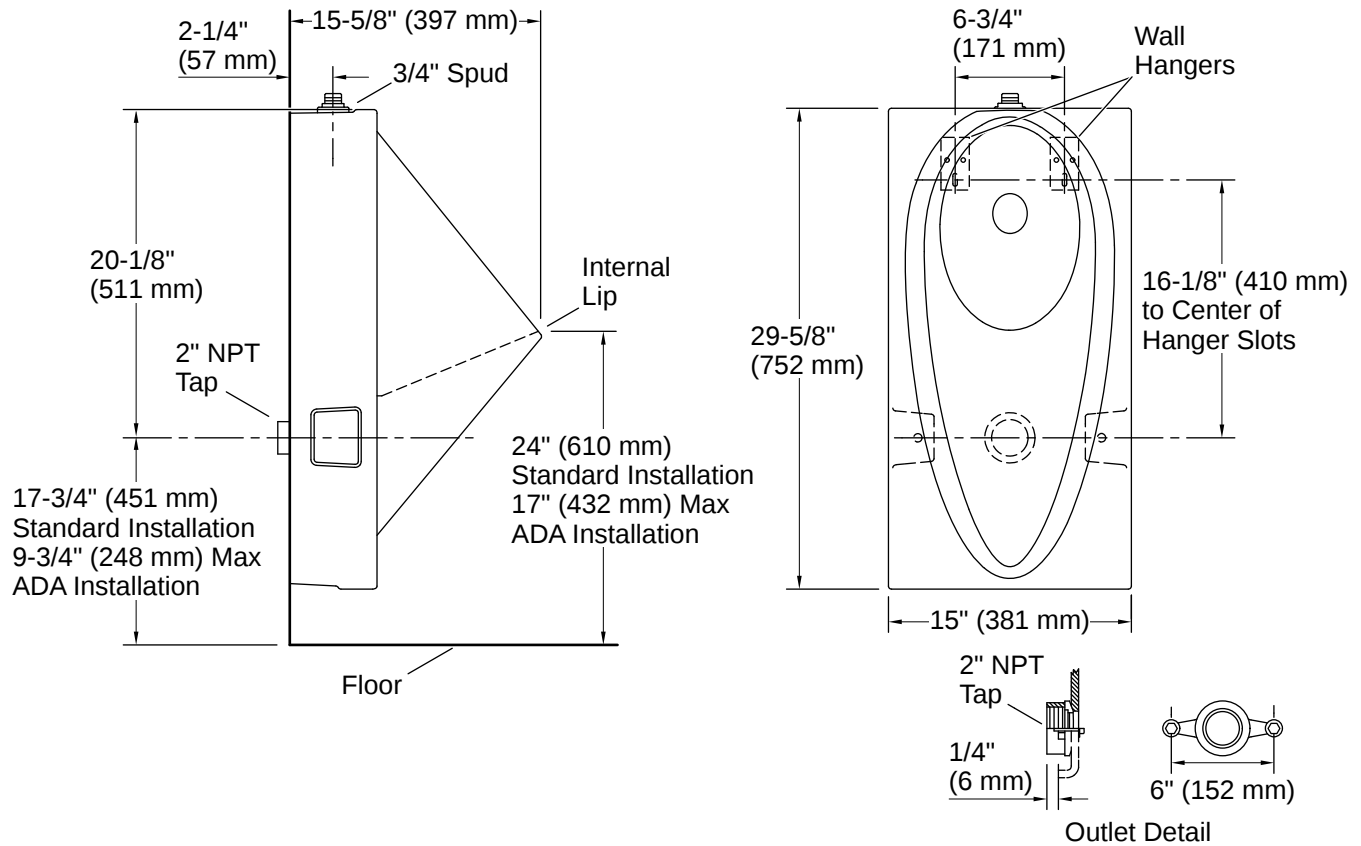

## Installation

- 29-5/8" H x 15" W x 15-5/8" D
- Large footprint covers old urinal wall print

## Installation Notes

*Install this product according to the installation instructions.*

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA compliant when installed to the specific requirements of these regulations.

