

## Engineering Specification

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_

Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

# LEAD FREE\*

## Series LF009 and LF009-FS Reduced Pressure Zone Assemblies

Size: 1/4" – 3"

Series LF009 and LF009-FS Reduced Pressure Zone Assemblies are designed to protect potable water supplies in accordance with national plumbing codes and water authority requirements. These series are used in a variety of installations, including the prevention of health hazard cross-connections in piping systems or for containment at the service line entrance. They are also used in irrigation systems, boiler feed, water lines, and other installations requiring maximum protection. The body construction is fused with ArmorTek™ coating technology to resist corrosion due to microbial induced corrosion (MIC) or exposed metal substrate.\* The series also features Lead Free\* construction to comply with Lead Free\* installation requirements.

Both series feature two in-line, independent check valves, captured springs, and replaceable check seats with an intermediate relief valve. Its compact modular design facilitates easy maintenance and assembly access. Sizes 1/4" to 1" shutoffs have tee handles.

Series LF009-FS assemblies of sizes 1/2" to 2" include an integrated flood sensor to detect excessive water discharges from the relief valve. When activated through an add-on sensor connection kit, the flood sensor relays a signal that triggers notification to qualified service personnel who can take corrective action, thus avoiding the possibility of ruinous flooding and costly damage. The add-on sensor connection kit is available for both building management systems, or BMS, and cellular communication. (For more information, refer to *Installation, Maintenance, and Repair Manual, Series 009-FS and LF009-FS.*)

### Features

- Single access cover and modular check construction for ease of maintenance
- Top entry to all internals for immediate accessibility
- Captured springs for safe maintenance
- Internal relief valve for reduced installation clearances
- Replaceable seats for economical repair
- ArmorTek™ coating technology to resist internal corrosion†
- Lead Free\* cast copper silicon alloy body construction (1/4" – 2")
- Fused epoxy coated cast iron body (2 1/2" – 3")
- Ball valve test cocks — screwdriver slotted (1/4" – 2")
- Large body passages provides low pressure drop
- Compact, space saving design
- No special tools required for servicing
- Integrated sensor for flood detection (1/2" – 2")


### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



LF009M2-QT-FS

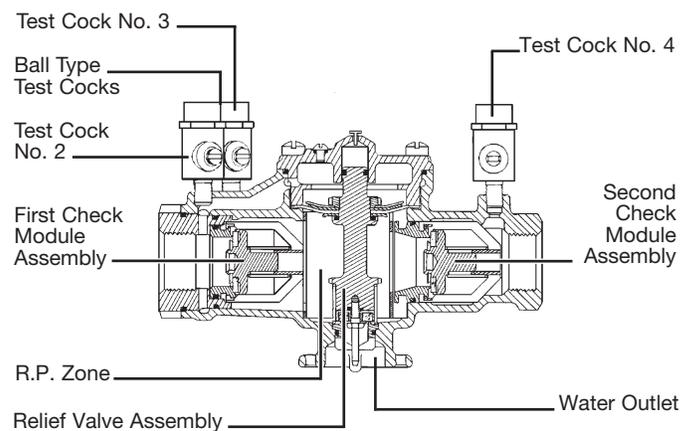

### Specification

A Reduced Pressure Zone Assembly shall be installed at each potential health hazard location to prevent backflow due to backsiphonage and/or backpressure. The assembly shall consist of an internal pressure differential relief valve located in a zone between two positive seating check modules with captured springs and silicone seat discs. Seats and seat discs shall be replaceable in both check modules and the relief valve. There shall be no threads or screws in the waterway exposed to line fluids. Service of all internal components shall be through a single access cover secured with stainless steel bolts. Body and shutoffs shall be constructed using Lead Free\* cast copper silicon alloy materials. Lead Free\* reduced pressure zone assembly shall comply with state codes and standards, where applicable, requiring reduced lead content.

The assembly shall also include two resilient seated isolation valves, four resilient seated test cocks, and an air gap drain fitting. The valve body shall utilize a coating system with built-in electrochemical corrosion inhibitor and microbial inhibitor.† The assembly shall meet the requirements of USC; ASSE Std. 1013; AWWA Std. C511; CSA B64.4. Shall be a Watts Series LF009.

### NOTICE

Inquire with governing authorities for local installation requirements.

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

†Amortek coating applied to the 2 1/2" and 3" models only.

## Available Models: 1/4" – 2"

### Prefix:

U– Union connections

### Suffix:

LF – Without shutoff valves  
 PC – Internal polymer coating  
 Press\*\* – Press inlet x press outlet (1/2" – 2")  
 QT – Quarter-turn ball valves  
 S – Strainer

## Available Models: 2 1/2" – 3"

### Suffix:

LF – Without shutoff valves  
 NRS – Non-rising stem resilient seated gate valves  
 OSY – UL/FM outside stem and yoke resilient seated gate valves  
 S-FDA – FDA epoxy coated strainer

NOTE: The installation of a drain line is recommended. When installing a drain line, an air gap is necessary. (For more information download ES-AG/EL/TC at watts.com.)

## Materials: 1/4" – 2"

Lead Free\* cast copper silicon alloy body construction, silicone rubber disc material in the first and second check plus the relief valve. Replaceable polymer check seats for first and second checks. Removable relief valve seats. Stainless steel cover bolts.

Standardly furnished with NPT body connections. Model LF009QT furnished with quarter-turn, full port, resilient seated, Lead Free\* cast copper silicon alloy body ball valve shutoffs.

## Materials: 2 1/2" – 3"

- FDA-approved epoxy-coated cast iron unibody with plastic seats
- Relief valve with stainless steel seat and trim
- Lead Free\* cast copper silicon alloy body ball valve test cocks

## Air Gaps and Elbows

MODEL	DRAIN OUTLET	DIMENSIONS				WEIGHT	
		For 909, 009, and 993 sizes		A		B	
	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>	<i>in.</i> <i>mm</i>		
909AGA	1/4"-1/2" 009, 3/4" 009M2/M3	1/2 13	2 3/8 60	3 1/8 79	0.625	0.28	
909AGC	3/4"-1" 009/909, 1"-1 1/2" 009M2	1 25	3 1/4 83	4 7/8 124	1.5	0.68	
909AGF	1 1/4"-2" 009M1, 1 1/4"-3" 009/909, 2" 009M2, 4"-6" 993	2 51	4 3/8 111	6 3/4 171	3.25	1.47	
909AGK	4"-6" 909, 8"-10" 909M1	3 76	6 3/8 162	9 5/8 244	6.25	2.83	
909AGM	8"-10" 909	4 102	7 3/8 187	11 1/4 286	15.5	7.03	
909ELA	1/4"-1/2" 009, 3/4" 009M2/M3	- -	- -	- -	-	-	
909ELC	3/4"-1" 009/909	- -	2 3/8 60	2 3/8 60	0.38	0.17	
909ELF*	1 1/4"-2" 009M1, 1 1/4"-2" 009/909, 2" 009M2, 4"-6" 993	- -	3 3/8 92	3 3/8 92	2	0.91	
909ELH* Vertical	2 1/2"-3" 009/909	- -	- -	- -	-	-	

\*Epoxy coated

\*\* Viega ProPress® connections are optional factory-installed fitting on each end of the approved/certified assembly.

## Pressure / Temperature

### Sizes 1/4" – 2"

Suitable for supply pressure up to 175 psi (12.1 bar)  
 Water temperature: 33°F – 180°F (0.5° – 82°C)

### Sizes 2 1/2" – 3"

Suitable for supply pressures up to 175 psi (12.1 bar)  
 Water temperature: 110°F (43°C) continuous; 140°F (60°C) intermittent

## Standards

USC  
 ASSE No. 1013  
 AWWA C511  
 CSA B64.4  
 IAPMO File No. 1563

## Approvals



ASSE, AWWA, CSA, IAPMO

Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California

Approval models NRS, OSY, PC, QT


UL Classified

2 1/2" – 3" with OSY gate valves

3/4" – 2" without shutoff valves (-LF), except LF009M3LF


## Insulated Enclosure

The WattsBox insulated enclosure is available for Series LF009/LF009-FS. For more information download ES-WB at watts.com.

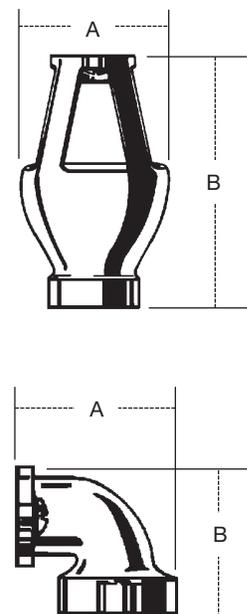


## Dimensions – Weight

Size: 1/4" – 3/8"

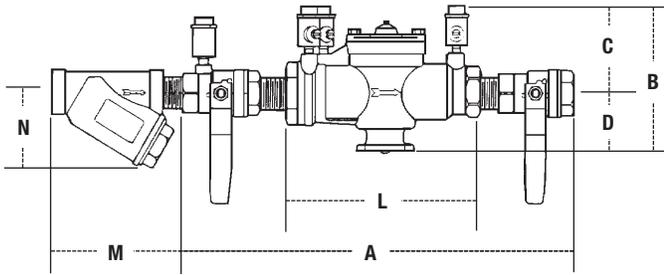




Size: 1/2" – 2"

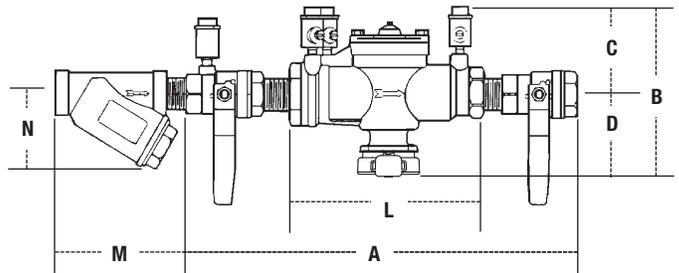

SIZE		DIMENSIONS (APPROX.)										WEIGHT					
in.	mm	A		B		C		D		L		M		N		lb	kg
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		
1/4	25.4	10	250	4 5/8	117	3 3/8	86	1 1/4	32	5 1/2	140	2 3/8	60	2 1/2	64	5	2
3/8	31.8	10	250	4 5/8	117	3 3/8	86	1 1/4	32	5 1/2	140	2 3/8	60	2 1/2	64	5	2
1/2	38.1	10	250	5 7/8	149	3 3/8	86	2 1/2	64	5 1/2	140	2 3/4	70	2 1/4	57	5	2
3/4	47.6	10 3/4	273	6 1/4	159	3 1/2	89	2 3/4	70	6 3/4	171	3 3/16	81	2 3/4	70	6	3
1	50.8	14 1/2	368	6 1/4	159	3	76	3 1/4	83	9 1/2	241	3 3/4	95	3	76	12	5
1 1/4	63.5	17 3/8	441	6 3/4	169	3 1/2	89	3 1/4	83	11 3/8	289	4 7/16	113	3 1/2	89	15	6
1 1/2	76.2	17 3/8	454	6 3/4	169	3 1/2	89	3 1/4	83	11 1/8	283	4 7/8	124	4	102	16	7
2	101.6	21 3/8	543	8 3/4	222	4 1/2	114	4 1/4	108	13 1/2	343	5 5/16	151	5	127	30	13

## Dimensions – Weight

Size: 2 1/2" – 3"

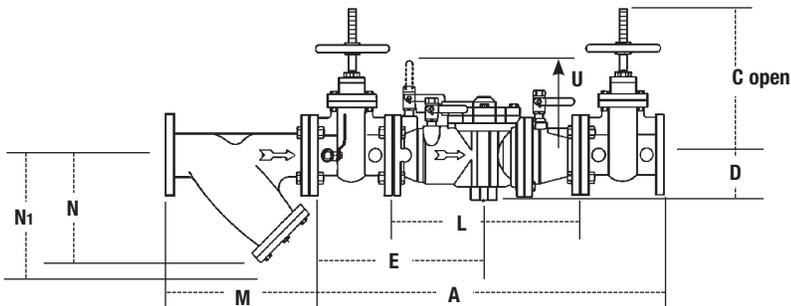

Watts G-4000 Series  
QT – Ball Valves

STRAINER SIZE		DIMENSIONS (APPROX.)					WEIGHT		
in.	mm	M		N		N <sub>1</sub> †		lb	kg
		in.	mm	in.	mm	in.	mm		
2 1/2	65	10	254	6 1/2	165	9 3/4	248	28	12.7
3	80	10 1/8	257	7	178	10	254	34	15.4

†Clearance for servicing

MODEL	SIZE	DIMENSIONS (APPROX.)										WEIGHT					
		A		C		D		E		L		R		U		lb	kg
	in.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm		
LF009LF	2 1/2	—	—	—	—	4 1/2	114	—	—	18 1/8	460	—	—	10 5/8	270	76	34.5
LF009OSY	2 1/2	33 3/4	845	15 7/8	403	4 1/2	114	16 3/8	416	18 1/8	460	7 3/4	197	10 5/8	270	166	75.3
LF009NRS	2 1/2	33 3/4	845	11 3/8	289	4 1/2	114	16 3/8	416	18 1/8	460	7 3/4	197	10 5/8	270	161	73.0
LF009LF	3	—	—	—	—	4 1/2	114	—	—	18 1/8	460	—	—	10 5/8	270	76	34.5
LF009OSY	3	34 1/4	870	18 1/2	470	4 1/2	114	16 5/8	422	18 1/8	460	8 3/4	222	10 5/8	270	198	89.8
LF009NRS	3	34 1/4	870	12 3/4	324	4 1/2	114	16 5/8	422	18 1/8	460	8 3/4	222	10 5/8	270	191	86.6

# Capacity

Performance as established by an independent testing laboratory.

The asterisk (\*) indicates the typical maximum system flow rate (7.5 ft/sec, 2.3 m/sec).

