



LF 1/2" STRAIGHT WATER HAMMER ARRESTOR

Product Features

- Helps to eliminate shock waves generated in piping systems by sudden on/off changes in flow
- Polypropylene piston
- AA arrestors are suitable for 1-3 fixture units
- May be installed at any angle
- To function more effectively, please install within 6 feet of the fixture the arrestor is servicing.
- Temperature range: 33°F to 180°F
- Max. working pressure: 350psi
- Meets ASSE 1010
- NSF 61& NSF 372 compliant
- cUPC/IAPMO listed




PFXWHATD

Model Numbers:

- PFXWHATD 1/2"-14NPT
- PFXWHAPD 1/2" F1807 PEX
- PFXWHAPPD 1/2" F1960 PEX

Product Specifications

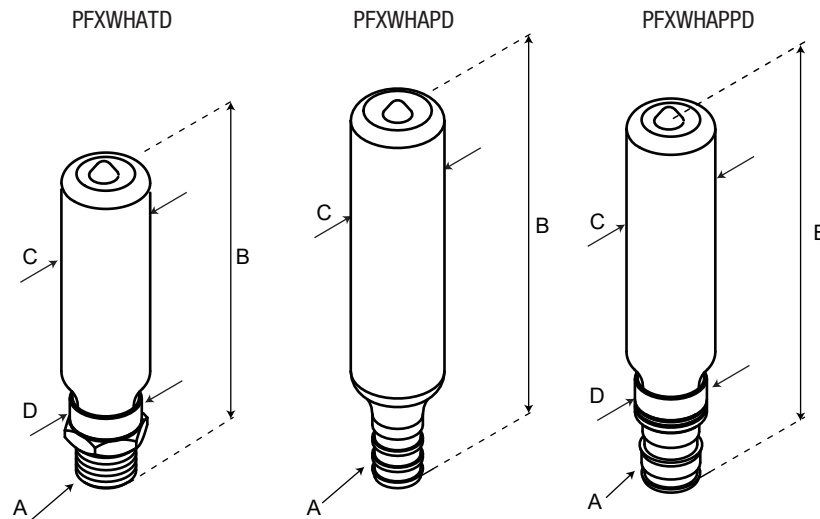

Model Numbers	A	B	C	D
PFXWHATD	1/2"-14NPT	3-5/8" (92.1mm)	7/8"(22.2mm)	7/8"(21.94mm)
PFXWHAPD	1/2" F1807 PEX	4-1/8" (104.8mm)	7/8"(22.2mm)	
PFXWHAPPD	1/2" F1960 PEX	4-1/8" (104.8mm)	7/8"(22.2mm)	7/8"(21.94mm)

* All measurements are nominal. Please verify before actual installation.

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.



FERGUSON.COM/PROFLO