

LF PEX Tee Water Hammer Arrestor



Product Features

- For single fixture use
- Helps to eliminate shock waves generated in piping systems by sudden on/off changes in flow
- Polypropylene piston
- In-line PEX connection
- AA arrestors are suitable for 1-3 fixture units
- May be installed at any angle.
- To function more effectively, please install within 6 feet of the fixture the arrestor is servicing.
- Approved for installation with no access panels required.



PFXWHAPTD

Product Specifications

Temperature Range: 33°F to 180°F

Max. Working Pressure: 350psi


ASSE 1010-2004

IAMPO Listed (cUPC)


Certified to NSF 372 requirements

Model Numbers	A	B	C
PFXWHAPTD	1/2" F1807 PEX	3-7/8" (98.4mm)	2-3/16" (55.6mm)
PFXWHAPPTD	1/2" F1960 PEX	3-7/8" (98.4mm)	2-1/4" (57.2mm)

PFXWHAPTD

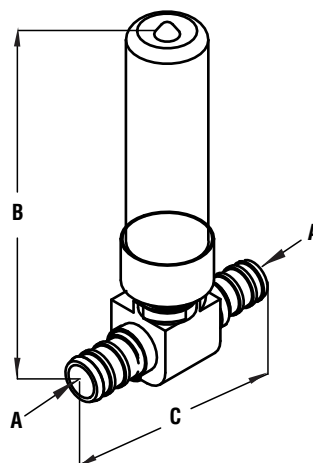

PFXWHAPPTD

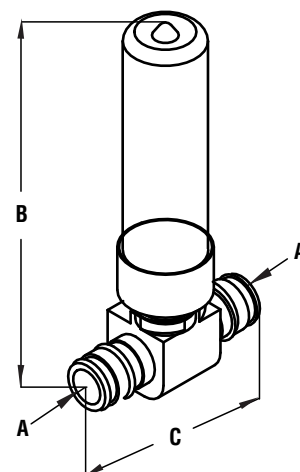

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

Distributed Exclusively by Ferguson and Wolseley Canada

© 2016 Ferguson Enterprises, Inc. All Rights Reserved



CAP 08/16-F