

LF 1/2" T/S SWT Water Hammer Arrestor



Product Features

- For single fixture use
- Helps to eliminate shock waves generated in piping systems by sudden on/off changes in flow
- Polypropylene piston
- Sweat branch arrestor easily installs on sweat tub/shower valves
- AA arrestors are suitable for 1-3 fixture units
- May be installed at any angle.
- To function more effectively, please install within 6 feet of the fixture the arrestor is servicing.
- Approved for installation with no access panels required.



PFXWHATSD

Product Specifications

Temperature Range: 33°F to 180°F


Max. Working Pressure: 350psi

ASSE 1010-2004

IAMPO Listed (cUPC)

Certified to NSF 372 requirements

Model Numbers	A	B	C	D
PFXWHATSD	1/2" Female Sweat X 1/2" Male Sweat	6-1/4" (158.7mm)	2" (5.0mm)	4-3/4" (120.7mm)

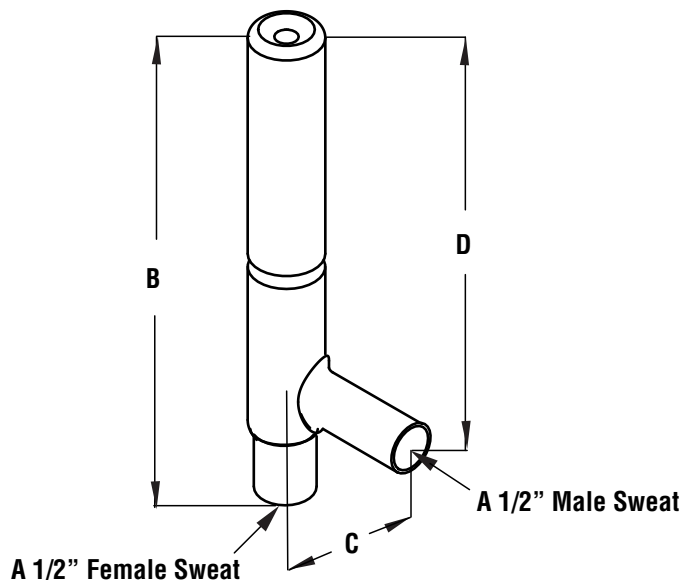

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

