



Highline® Class Five® Dual Flush Toilet K-6393

Features

- Vitreous china.
- Elongated bowl.
- Class Five® dual flushing system.
- Polished chrome left-hand trip lever.
- Less seat and supply.
- 10" (254 mm) rough-in.
- High efficiency 1.6 gpf (6.1 lpf) or 1.1 gpf (4.2 lpf).
- 2-1/8" (54 mm) glazed trapway.
- 11-3/8" (289 mm) x 8" (203 mm) water area.



For complete listing of available colors, go to kohler.com.



ADA

CSA B651

OBC

Codes/Standards

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

EPA WaterSense®

CSA B651


OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Product Specification

Toilet shall be 29-1/2" (749 mm) in length, 18" (457 mm) in width, and 31-1/4" (794 mm) in height. Toilet shall be made of vitreous china. Toilet shall be two-piece. Product shall feature 1.6 gpf (6.1 lpf) or 1.1 gpf (4.2 lpf). Toilet shall be left-hand trip lever. Toilet shall be Class Five® dual flushing system. Toilet shall be 10" (305 mm) rough-in. Toilet shall be Kohler Model K-6393.

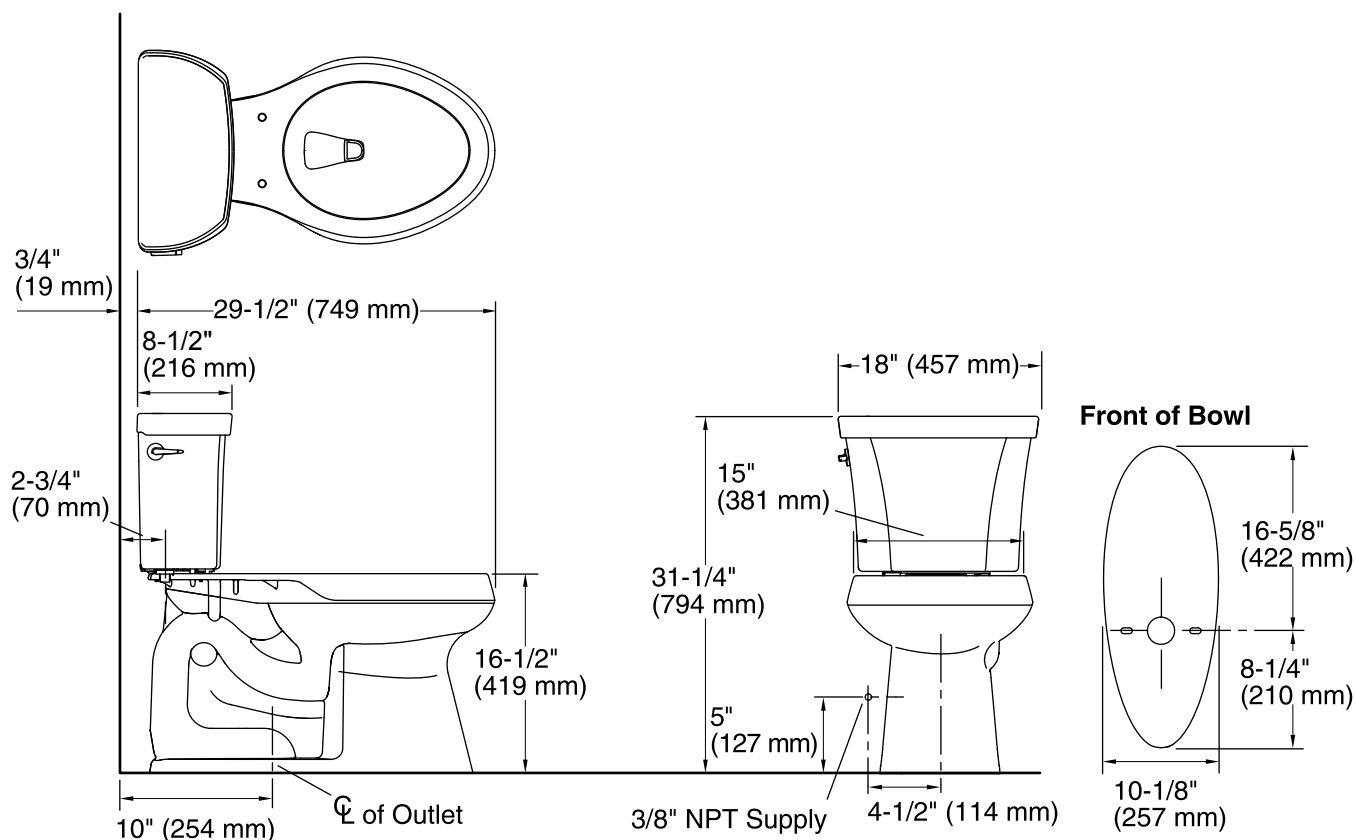

Technical Information

All measurements are approximate only.

Toilet style:	Two-piece
Bowl shape:	Elongated front
Passageway:	2-1/8" (54 mm)
Flush rate - full:	1.6 gpf (6.1 lpf)
Flush rate - short:	1.1 gpf (4.2 lpf)
Water area:	11-3/8" x 8" (289 mm x 203 mm)
Water depth from rim:	5-3/8" (137 mm)
Rough-in:	10" (254 mm)
Seat hole centers:	5-1/2" (140 mm)

Installation Notes

Install this product according to the installation guide.

K-4731 is the recommended toilet seat for public use accessible installations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.