





HR-LED87

LEDme® Button Light

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Designed for recessed or surface mounted installations, delivering strong light output with the latest in LED technology.

FEATURES

- Recessed or surface mounting
- Quick and easy installation
- Includes 72" lead wire
- 3000K color temperature
- 70,000 hour rated life
- UL and CUL Listed
- 5 year WAC Lighting product warranty

FIXTURE PERFORMANCE

	Watt	Lumens	Efficacy	CRI
HR-LED87	5W	180	36 Lm/W	85
HR-LED87S	4.8W	155	32.3 Lm/W	

SPECIFICATIONS

Construction: Die-cast aluminum fixture, stamped steel housing for surface mount. Glass beam spread lens.

Wiring: Includes 72" pre-installed wires that lead out through the top.

Transformers: Class 2, 24V remote and plug-in transformers allow for up to 20 button lights to be wired together. Use a multiple terminal block to wire up to 6 fixtures in a neat under cabinet installation without the use of open splices (see below).

Light Source: Six 3000K LEDs.

Dimming: May be dimmed to 10% with an electronic low voltage (ELV) dimmer.

Mounting: *Recessed*– 2 1/8" cutout hole. Compression springs hold fixture firmly in place. *Surface*– Screw housing cover to surface, compress springs and insert into cover. **Not recommended for use in ceiling.**

Finish: Black (BK), Dark Bronze (DB) and White (WT) powder coat, electroplated Brushed Nickel (BN), Copper Bronze (CB) and Chrome (CH).

Standards: UL & CUL Listed.


ORDER NUMBER

Model #	Color Temp	Finish
HR-LED87	3000K	BK <i>Black</i>
HR-LED87S		BN <i>Brushed Nickel</i>
		CB <i>Copper Bronze</i>
HR-LED87-27	2700K	CH <i>Chrome</i>
HR-LED87S-27		DB <i>Dark Bronze</i>
		WT <i>White</i>




Example: **HR-LED87S-27-BN**

- Minimizes wiring back to transformer
- Minimal voltage drop, power supplied using a variable current
- If one fixture goes out the rest remain on

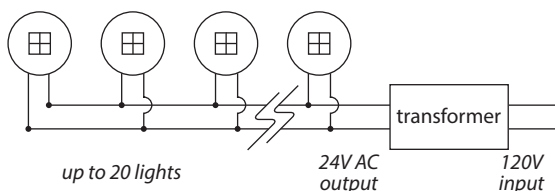

FINISHES



RETROFIT RECESSED HOUSING

Model #	Finish
HR-LED-COV	BK, BN, CB, CH, DB, WT

Use to replace low voltage HR-88 and HR-86 button lights using existing wiring and cutout.

CLASS 2 ELECTRONIC TRANSFORMERS

Type	Model	Dim	Input	Output	Power Up To	Dimensions
Remote	EN-2460-RB2	Yes	120V	24V AC/60W	12 x LED87	6 1/2" x 1 5/8" x 1 1/4"
	EN-24100-RB2			24V AC/96W	20 x LED87	6 1/2" x 1 5/8" x 1 1/4"
Plug-In	EN-2460-P-AR	Yes	120V	24V AC/60W	12 x LED87	2 3/4" X 1 5/8" X 1 3/4"

Includes 6' cord and 5 SL-WC-1 clips.

MULTIPLE TERMINAL BLOCK

Model #	Dimensions
MTB-01	L: 3 1/4" W: 1 3/4" H: 7/8"

12.5A max accommodates up to 6 output connections for 14 AWG wires.

FROSTED LENS ACCESSORY

Model #
LENS-13-FR

Softens light and reduce glare for square or round

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585


LEDme® BUTTON LIGHT - HR-LED87

Photometrics


WAC LIGHTING

Responsible Lighting®


Round - 2700K

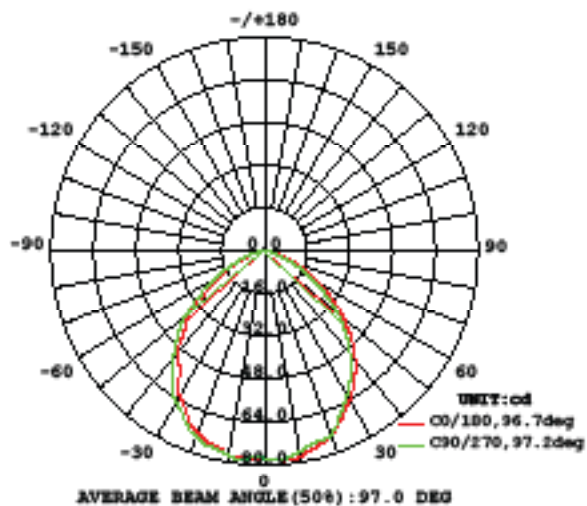


Round - 3000K

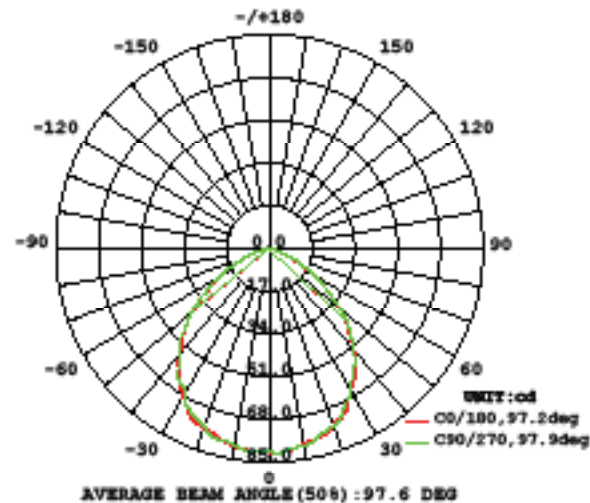

Square - 2700K

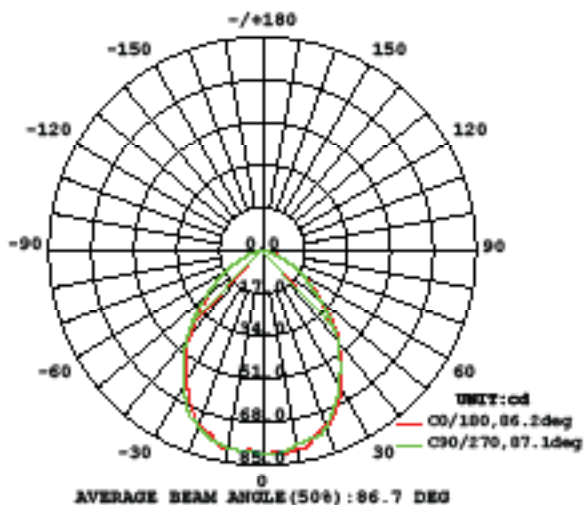

Square - 3000K

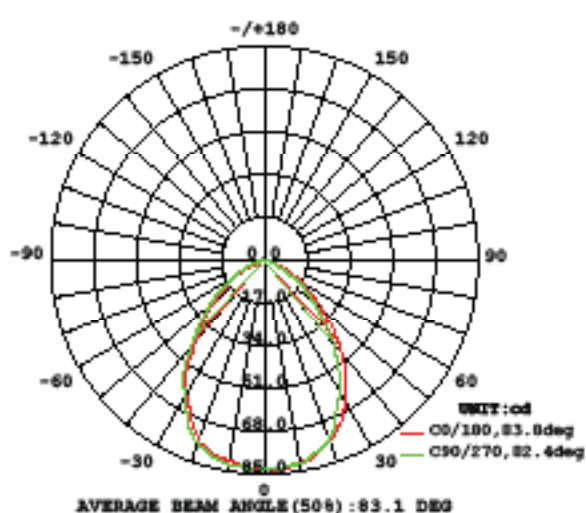

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585