


"SHARP POINT" DRILL SCREWS



Product Data Sheet

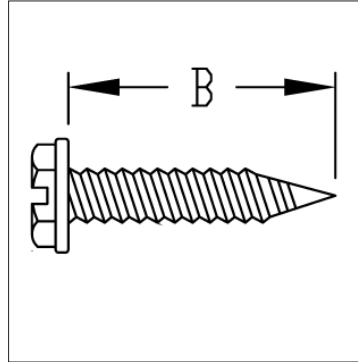

Features

Sharp Point - Won't run on light gauges
No pre-drilling necessary - cuts its own threads.

Description

Elgen's Self Drilling Screw is designed for fastening to aluminum and steel.

Standard Construction

Manufactured from AISI 1018 or AISI 1022 Carbon Steel
Material and Mechanical Properties: SAE J933.
Dimensions: ASME B18.6.3 and ASME B18.6.4
Zinc-Clear Plating: Meet ASTM F1941 FeZn3C
Core Hardness: HRC 28-38

Slotted hex washer head

Size	Across Flats (in)	Socket Size (in)	Washer Diameter (in)
#8	1/4	7/16	0.322-0.348
#10	5/16	1/2	0.384-0.414
#12	5/16	1/2	0.398-0.432
#14	3/8	9/16	0.480-0.520

Optional Construction

Stainless Steel 410

Packaging

Size	Length (in) B	Qty Per Box
#8	1/2	15,000
#8	3/4	10,000
#8	1	8,000
#8	1-1/2	5,000
#8	2	4,000
#10	1/2	10,000
#10	3/4	7,500
#10	1	5,000
#10	1-1/2	3,000
#10	2	2,000

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624

Tel: 800.503.9805 :: Fax: 201.964.9030

info@elgenmfg.com :: www.elgenmfg.com