


ONE-LOK™ MODEL D-SLCE DOMESTIC WEDGE RESTRAINT FOR AWWA C900/905 PVC PIPE

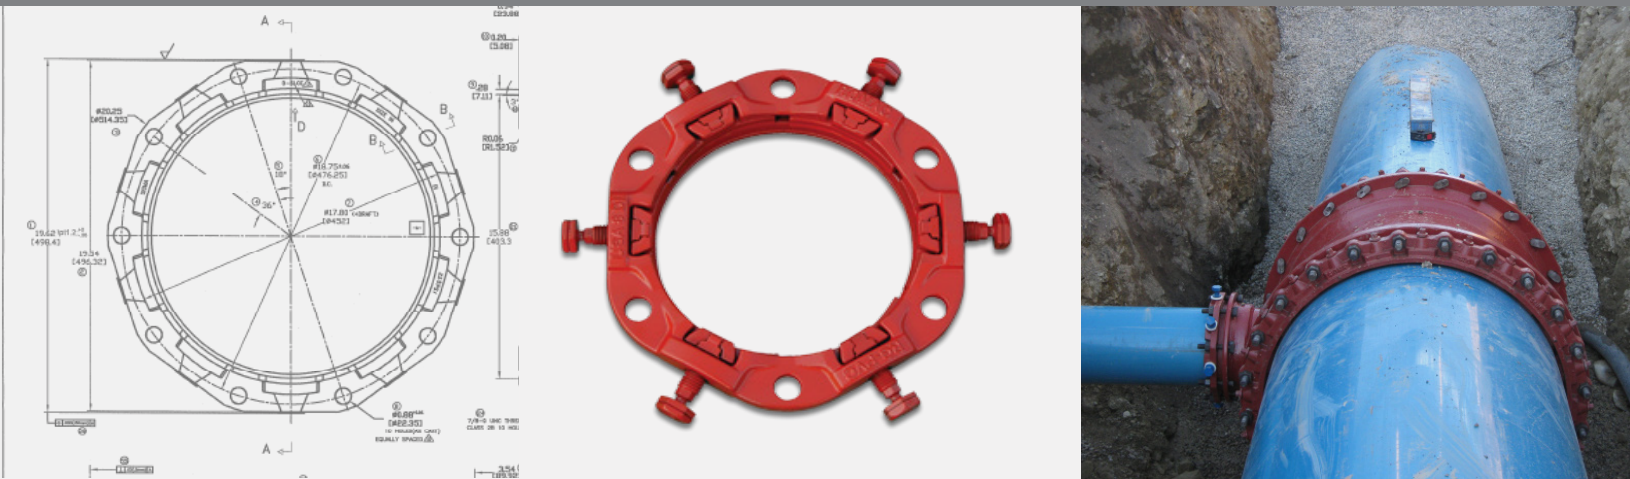

PRODUCT SPECIFICATIONS

- MATERIAL:**
- Gland body, wedge inserts and break-off top actuating bolts are manufactured of high strength ductile iron in accordance with ASTM A536, Grade 65-45-12.
- SIZE RANGE:**
- 3" through 36"
- DIMENSION:**
- Conform to ANSI/AWWA C111/A21.11, ANSI/AWWA C110/A21.10, ANSI/AWWA C153/A21.53 standards.
- PRESSURE RATINGS:**
- Equal to the water working pressure rating of the pipe upon which it is installed with a minimum 2:1 factor of safety.
- COATING:**
- Red Alkyd paint or Red Acrylic Enamel
 - Electro-deposition "CORRSAFETM" available upon request. For further information, please refer to our CORRSAFE Product Information sheet at <http://www.sigmaco.com/pipe-restraint-product-coatings-linings/> or fusion bonded polyester coating available on request.
- APPROVALS:**
- Factory Mutual approved in sizes 4"-12"
- DEFLECTION:**
- 5° on 3"-12", 2° on 14"-16", 1.5° on 18"-24" and 1° on 30"-36"
- TRACEABILITY:**
- Gland body, sizes 3"-24", is individually cast with exact heat code information. Gland body, wedge inserts and break-off top actuating bolts, sizes 30" & 36", are individually cast with exact heat code information.
- INSTALLATION:**
- In accordance with manufacturer's recommendation and applicable AWWA standards.